
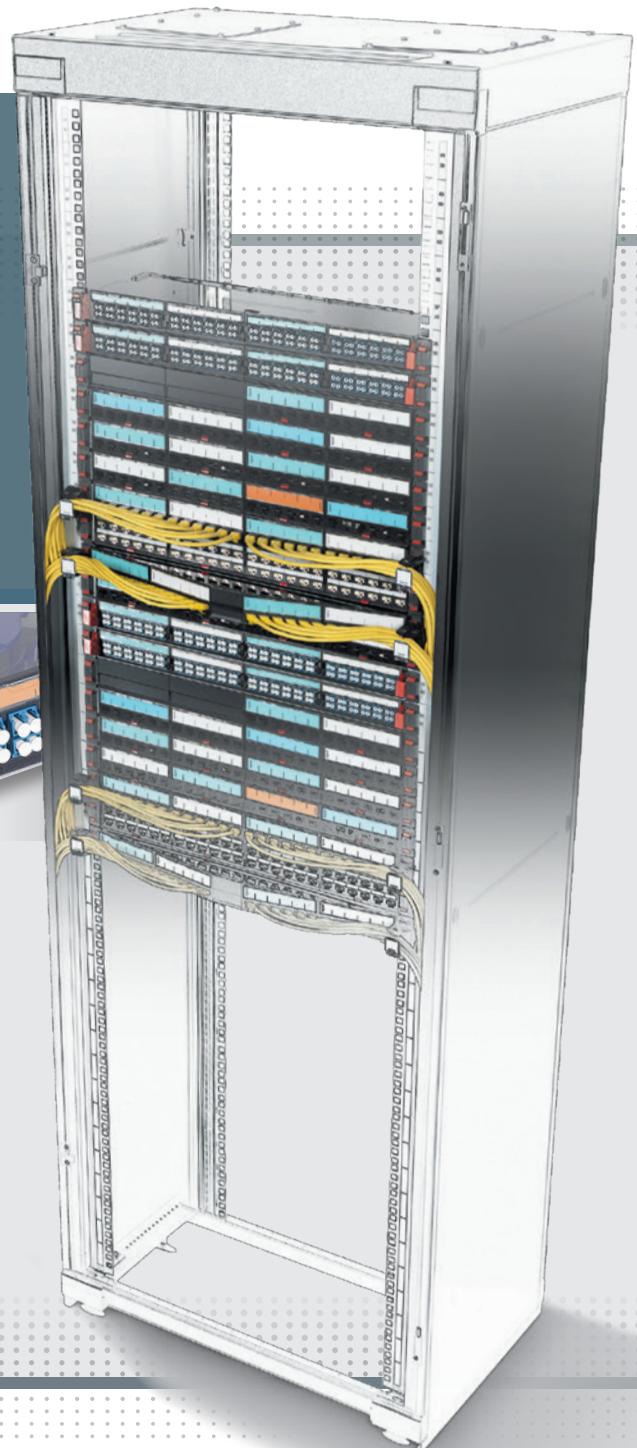


LCS3

3 DIMENSIONS OF EXCELLENCE

PERFORMANCE • SCALABILITY • EFFICIENCY

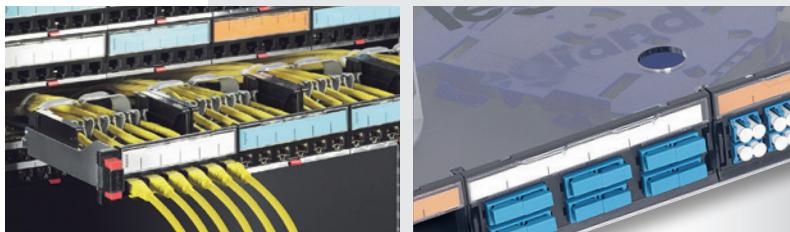

DATA CENTRE
LOCAL AREA NETWORK

Global strength


built on local knowledge

Legrand is the global specialist in electrical and digital building infrastructures. Innovation is the driving force behind its development.

With an increasing investment in research and development (circa 5% of sales) and more than 4,000 active patents, the Legrand Group is focused on maintaining a high rate of new product launches that present innovative solutions to the market.

CORPORATE SOCIAL RESPONSIBILITY

Legrand's CSR roadmap is a natural extension to the governance and sustainable development approach in which the company has been engaged for many years. The CSR roadmap firmly asserts Legrand's ongoing commitment to sustainable development.

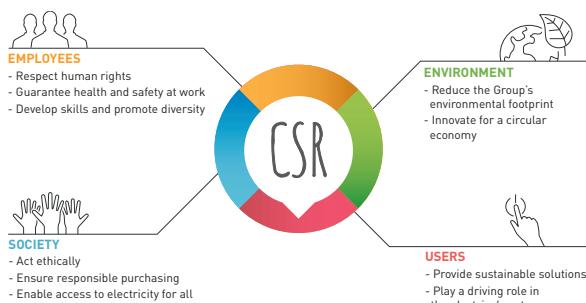

LEGRAND'S DIGITAL INFRASTRUCTURES BUSINESS UNIT

Legrand's digital infrastructures business unit offers sustainable solutions for data centres and local area networks. Modularity, flexibility and energy efficiency are key drivers throughout this extensive product portfolio, ensuring customers benefit from the latest technology that can adapt to the changing needs of the infrastructure.




LCS³

3 DIMENSIONS OF EXCELLENCE

PERFORMANCE • SCALABILITY • EFFICIENCY

INTRODUCTION

Our digital infrastructures expertise	2-3
High performance – fibre optic and copper systems	4-5



COPPER SYSTEM

RJ 45 connectors	6-7
Patch panels	8-9
Selection charts	10-14
Cat. 8, Cat. 6A, Cat. 6 & Cat. 5e product selection	15-30
Technical information	31-33



FIBRE OPTIC SYSTEM

Fibre optic panels	34-35
Selection charts	36-40
Fibre optic product selection	41-47
Technical information	48-49



LINKEO CABINETS

Freestanding cabinets and wall-mounting cabinets	50-51
Selection charts	52-55
Linkeo cabinets product selection	56-58
Technical information	59-63



PDUs

Solutions for any configuration	64-65
Zero-U PDUs & 1U PDUs	66-67
Selection charts	68-69
PDUs product selection	70-74
Technical information	75-77

CONTENTS

Our digital infrastructures expertise

Legrand's solutions for data communication perfectly address the key challenges for digital networks: performance, scalability and efficiency.

LOCAL AREA NETWORKS




SOLUTIONS FOR STRUCTURED CABLING

- Housing solutions
(19" freestanding and wall-mounting cabinets, open racks, PDUs, micro data centres, etc.)
- Copper solutions
(Controlled-access panel, controlled-access RJ 45, etc.)
- Fibre solutions
(Connectors, equipped and modular panels, bend-insensitive cables, etc.)



DATA CENTRE & SERVER ROOM

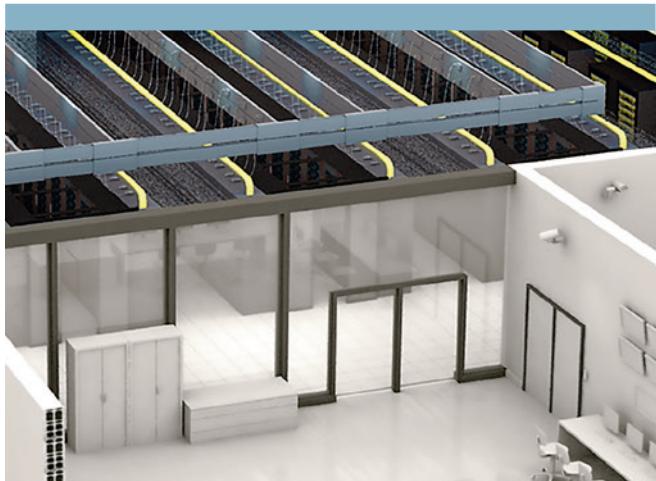

SOLUTIONS FOR STRUCTURED CABLING IN SERVER ROOMS

- Housing solutions
(Server cabinets, aisle containment, cooling units and cold corridor, open racks, PDUs, etc.)
- Copper solutions
(Preterminated, etc.)
- Fibre solutions
(Preterminated, intelligent patching, high-density fibre optic solutions, etc.)





POWERED BY SPECIALISTS



Legrand cabling systems currently provide high-quality connectivity to more than 200 million devices. The Legrand Group is a world leader in communication networks for data transmission. Its investment in the development and design of structured cabling systems and solutions has enabled it to expand its offer and achieve the highest level of performance.



Minkels is a knowledge-driven producer and worldwide supplier of high quality solutions for data centre infrastructure. Minkels' products stand out for their innovativeness and flexibility. Customers can always be assured of getting the very latest technology and modular solutions that respond to evolving, customer-specific business requirements.



Raritan offers power management solutions that include intelligent PDUs, transfer switches, environmental rack controllers and sensors as well as serial console servers and KVM-over-IP switches. Raritan's award-winning hardware solutions increase energy efficiency, improve reliability, and increase productivity.

High performance



LEGRAND'S LCS³ SYSTEM OFFERS YOU:

- 1 25 Gbps and 40 Gbps Ethernet applications
COPPER SYSTEM
- 2 40 Gbps and 100 Gbps Ethernet applications
FIBRE OPTIC SYSTEM
- 3 MTP/MPO high density and up to Cat. 8 solutions
FIBRE OPTIC AND COPPER SYSTEMS

FIBRE OPTIC SYSTEM

MTP/MPO SOLUTION TRANSMISSION UP TO 100 GBPS



High density connection with 12 or 24 fibres compliant with IEEE 802.3ba.




New MPO/MTP fibre optic drawers. Up to 96 LC on 1U. Easy access in order to move, add and change fibres.



Up to 144 LC on 1U. Available in 1U, 2U and 4U.


COPPER SYSTEM

CAT. 8 TRANSMISSION UP TO 40 GBPS

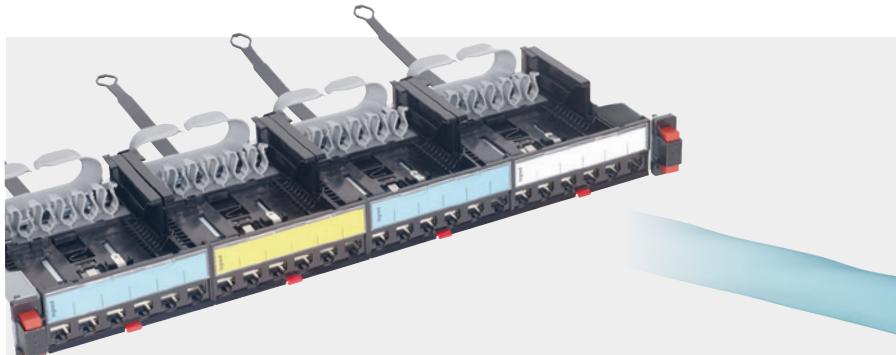

Cat. 8 toolless connector: up to 2500 connection/disconnection cycles.

Cable and connector compliant with ISO/IEC 11801 standards - third edition.

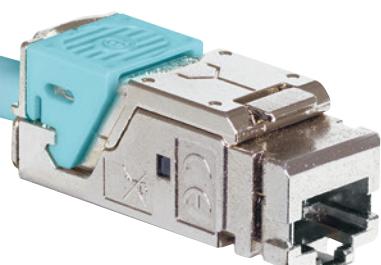

Copper system


RJ 45 connectors

Toolless connectors are available in all categories for fast installation both on patch panels and in the workstation. A perfect connection can be created in a few seconds, guaranteeing optimum performance of the link from the patch panel to the workstation. They are colour-coded so their category can be safely identified.




- 1 **TOOLLESS**
- 2 **A PERFECT CONNECTION**
- 3 **FAST-ON CONNECTIONS IN PATCH PANEL**


TOOLLESS CONNECTOR

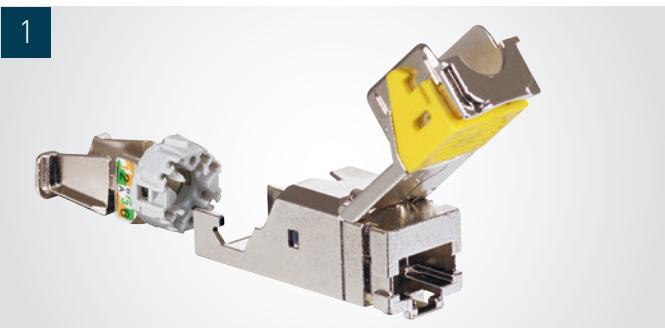

Take the wire housing

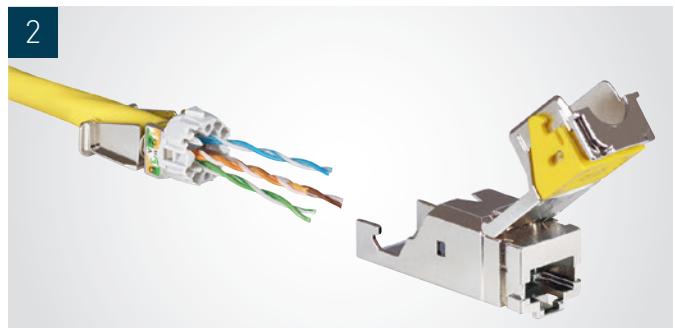


Pass the cable through the back of the wire housing

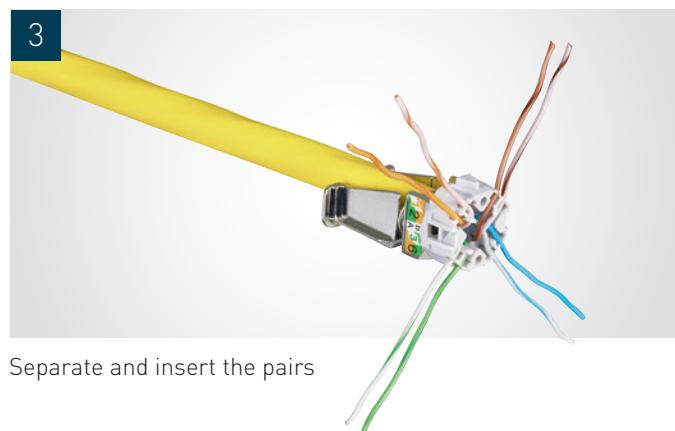

Separate and insert the pairs



Cut the pairs

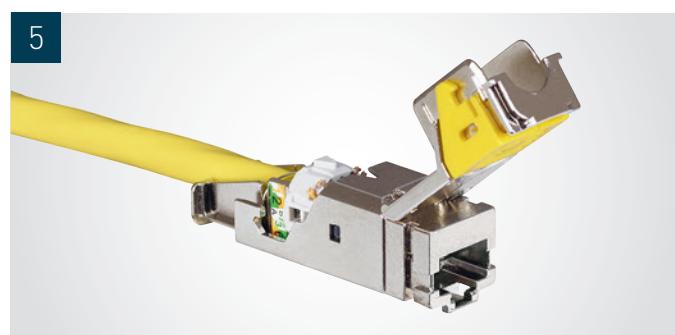

Install the wire housing without pushing



Push down the lever and lock the connector

Copper system patch panels

1

SLIDING CASSETTE:
EASIER MAINTENANCE

2


INNOVATIVE MODULAR
CASSETTE SYSTEM

3

FAST PUSH BUTTON
EXTRACTION

LCS³ patch panels have been designed to optimise space, with up to 48 ports per unit, and make maintenance and future upgrades easier. They are available in both flat and angled versions. They have a quick system for pulling out the unit and an innovative cable guiding system for tidy and easy cable management.

- Sliding cassettes for easier maintenance
- Fast push button extraction
- Innovative modular cassette system
- Connectors can be removed without disconnecting the cords
- Easy to mix with Legrand fibre optic solutions

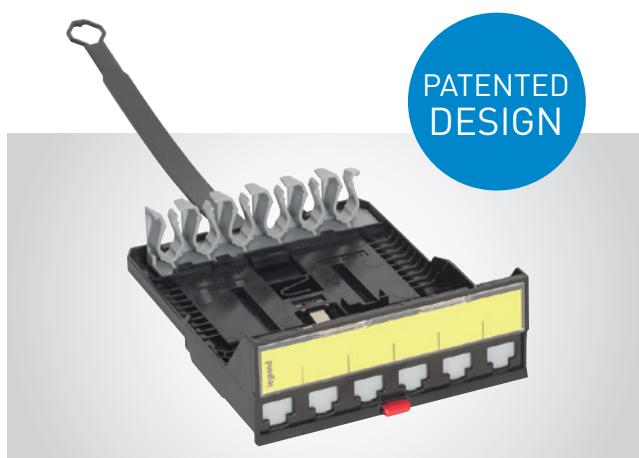

Cassette for up to 12 connectors



48 ports per unit

NEW QUICK-FIX SYSTEM

The image shows the Legrand Quick-Fix System components and a patch panel. On the left, there is a blue circular badge with the text "PATENTED DESIGN". Above it are two black plastic components: one with a red rectangular button and another with a white rectangular label. To the right is a close-up of a patch panel with several ports, showing the quick-fix system being used to secure a cable. The main patch panel below is a long, black, curved unit with multiple port sections. Labels with red arrows point to various features: "Strong steel structure" points to the top edge; "Cover for airflow management" points to the top surface; "High density - This supplies up to 48 ports in a single unit to take up less space in the rack" points to the front face; "Tidy cable management" points to the side of the panel; "Simple and efficient Identification of the ports" points to the front face; and "Quick-fix system" points to the red button on the far right.

Innovative quick-fixing solution:

- Push and connect system
- Automatic earth connection
- In-rack cabling optimised
- New accessory for patch cords with rotating system for angle adjustment and label holder

**Compatible with all panels
(Flat, angled, HD)**

ANGLED PATCH PANEL SOLUTION FROM 24 TO 48 PORTS PER UNIT

The image shows an angled patch panel with a curved design. Numerous yellow network cables are connected to its ports. A text box to the right provides information about the angled design.

Patch panels with an angled design allow the cable to run either side creating a perfect bend radius feeding into the vertical cable management.

Also available in 24 port version

connectivity selection tables - copper solutions

configure your system

LCS ³ PANELS			Cat. 8	Cat. 6A	Cat. 6
 1U patch panels equipped with 24 connectors		STP	0337 82 ⁽¹⁾ (see p. 15)	0337 72 ⁽¹⁾ (see p. 18)	0337 62 ⁽¹⁾ (see p. 22)
		UTP	-	0337 70 ⁽¹⁾ (see p. 18)	0337 60 ⁽¹⁾ (see p. 22)
		FTP	-	-	0337 61 ⁽¹⁾ (see p. 22)
 1U patch panel to be equipped		With cassette⁽²⁾	0337 90 ⁽¹⁾ (see p. 15)	0337 90 ⁽¹⁾ (see p. 18)	0337 90 ⁽¹⁾ (see p. 22)
		Without cassette	0337 91 ⁽¹⁾ (see p. 15)	0337 91 ⁽¹⁾ (see p. 18)	0337 91 ⁽¹⁾ (see p. 22)
 High density 1U patch panel to be equipped with 48 ports		-	-	0337 93 ⁽¹⁾ (see p. 18)	0337 93 ⁽¹⁾ (see p. 22)
 1U angled patch panel to be equipped with connectors		0337 92 ⁽¹⁾ (see p. 16)	0337 92 ⁽¹⁾ (see p. 19)	0337 92 ⁽¹⁾ (see p. 23)	
		-	-	0337 94 ⁽¹⁾ (see p. 19)	0337 94 ⁽¹⁾ (see p. 23)

(1) Equipped with new generation Quick-Fix

(2) Standard cassette has 6 ports

NOTE: for Cat. 5e selection of products see p. 26-30



connectivity selection tables - copper solutions (continued)

configure your system

LCS ³ CONNECTORS			Cat. 8	Cat. 6A	Cat. 6
		STP	0337 85 (see p. 16)	0337 75 (see p. 19)	0337 65 (see p. 23)
	RJ 45 connectors for flat and angled panels	UTP	-	0337 73 (see p. 19)	0337 63 (see p. 23)
		FTP	-	-	0337 64 (see p. 23)
	Cord management		0337 59 (see p. 16)	0337 59 (see p. 19)	0337 59 (see p. 23)
	Cassettes for flat panels to be equipped		0337 55 (see p. 16)	0337 55 (see p. 19)	0337 55 (see p. 23)
	High density cassettes for flat panels to be equipped		-	0337 95 (see p. 19)	0337 95 (see p. 23)
	Blanking cassettes		0337 57 (see p. 16)	0337 57 (see p. 19)	0337 57 (see p. 23)
	Angled panel cover		0337 58 (see p. 16)	0337 58 (see p. 19)	0337 58 (see p. 23)
	Port blanking modules		0337 56 (see p. 16)	0337 56 (see p. 19)	0337 56 (see p. 23)

connectivity selection tables - copper solutions (continued)

configure your system

RJ 45 PATCH CORDS					Cat. 8	Cat. 6A	Cat. 6
 LSZH	 S/FTP	Shielded impedance 100 Ω	0.5 m	 0337 01 (see p. 17)	-	-	
			1 m	 0337 02 (see p. 17)	-	-	
			2 m	 0337 03 (see p. 17)	-	-	
			3 m	 0337 04 (see p. 17)	-	-	
			5 m	 0337 05 (see p. 17)	-	-	
			8 m	 0337 06 (see p. 17)	-	-	
			10 m	 0337 07 (see p. 17)	-	-	
			0.5 m	 0337 21 (see p. 17)  0337 08 (see p. 17)	-	-	
			1 m	 0337 22 (see p. 17)  0337 09 (see p. 17)	 0518 70 (see p. 20)  0518 66 (see p. 20)	-	
			2 m	 0337 23 (see p. 17)  0337 10 (see p. 17)	 0518 71 (see p. 20)  0518 67 (see p. 20)	-	
			3 m	 0337 24 (see p. 17)  0337 11 (see p. 17)	 0518 72 (see p. 20)  0518 68 (see p. 20)	-	
			5 m	 0337 25 (see p. 17)  0337 12 (see p. 17)	 0518 73 (see p. 20)  0518 69 (see p. 20)	-	
			8 m	 0337 26 (see p. 17)  0337 13 (see p. 17)	-	-	
			10 m	 0337 27 (see p. 17)  0337 17 (see p. 17)	-	-	
 F/UTP	 Screened impedance 100 Ω	Screened impedance 100 Ω	1 m	-	-	 0518 54 (see p. 24)	
			2 m	-	-	 0518 50 (see p. 24)	
			3 m	-	-	 0518 55 (see p. 24)	
			5 m	-	-	 0518 51 (see p. 24)	
	 Unscreened impedance 100 Ω	Unscreened impedance 100 Ω	1 m	-	-	 0518 56 (see p. 24)	
			2 m	-	-	 0518 52 (see p. 24)	
			3 m	-	-	 0518 57 (see p. 24)	
			5 m	-	-	 0518 53 (see p. 24)	

Key:  = RAL 6027 •  = RAL 3020 •  = RAL 6026

connectivity selection tables - copper solutions (continued)

configure your system

RJ 45 PATCH CORDS					Cat. 8	Cat. 6A	Cat. 6	
	 PVC	 F/UTP	Shielded impedance 100 Ω	0.5 m	-	 0518 16 (see p. 20)	-	
				1 m	-	 0517 80 (see p. 20)	 0517 52 (see p. 24)	
				2 m	-	 0517 81 (see p. 20)	 0517 53 (see p. 24)	
				3 m	-	 0517 82 (see p. 20)	 0517 54 (see p. 24)	
				5 m	-	 0517 83 (see p. 20)	 0517 55 (see p. 24)	
	 U/UTP		Screened impedance 100 Ω	0.5 m	-	-	 0518 15 (see p. 24)	
				1 m	-	-	 0517 62 (see p. 24)	
				2 m	-	-	 0517 63 (see p. 24)	
				3 m	-	-	 0517 64 (see p. 24)	
				5 m	-	-	 0517 65 (see p. 24)	
	 U/UTP		Unscreened impedance 100 Ω	0.5 m	-	-	 0518 18 (see p. 24)	
				1 m	-	-	 0517 72 (see p. 24)	
				2 m	-	-	 0517 73 (see p. 24)	
				3 m	-	-	 0517 74 (see p. 24)	
				5 m	-	-	 0517 75 (see p. 24)	

COPPER CABLES FOR LOCAL NETWORKS (305 M OR 500 M REELS)

	 LSZH	 U/UTP	4 pairs	305 m	-	-	 0327 54 (see p. 24)
				500 m	-	-	 0328 61 (see p. 24)
		 S/FTP	4 pairs	500 m	0337 88 (see p. 17)	 0327 77 ⁽¹⁾ / 0328 82 ⁽¹⁾ (see p. 20)	-
				500 m	-	 0327 79 ⁽¹⁾ (see p. 20)	-
		 F/UTP	4 pairs	305 m	-	-	 0328 56 (see p. 24)
				500 m	-	 0327 78 (see p. 20)	 0327 56 (see p. 24)
		 F/FTP	4 pairs	500 m	-	 0328 78 (see p. 20)	 0327 76 (see p. 24)
				500 m	-	 0327 99 / 0328 83 (see p. 20)	-
		 U/FTP	2 x 4 pairs	500 m	-	 0327 98 (see p. 20)	-
				500 m	-	 0328 84 (see p. 20)	-
		 PVC	4 pairs	500 m	-	 0328 85 (see p. 20)	-
				500 m	-	-	 0327 55 (see p. 24)
		 SF/UTP	4 pairs	500 m	-	-	 0327 59 (see p. 24)
				305 m	-	-	 0328 57 (see p. 24)
		 F/UTP	4 pairs	500 m	-	-	 0327 58 (see p. 24)

Key:  = RAL 1018 •  = RAL 5015

connectivity selection tables - copper solutions (continued)

configure your system


ARTEOR RANGE RJ 45 SOCKETS				Cat. 6A	Cat. 6	Cat. 5e
	STP	1 module	White	5723 06 (see p. 21)	-	-
			Magnesium	5728 06 (see p. 21)	-	-
			With orange shutter	White	5723 51 (see p. 21)	-
			With orange shutter	Magnesium	5728 51 (see p. 21)	-
		2 modules - with controlled access	With green shutter	White	5723 52 (see p. 21)	-
			With green shutter	Magnesium	5728 52 (see p. 21)	-
	STP - shielded	With red shutter	White	5723 50 (see p. 21)	-	-
			Magnesium	5728 50 (see p. 21)	-	-
		1 module	White	-	5723 23 (see p. 25)	-
			Magnesium	-	5728 23 (see p. 25)	-
			White	-	5723 17 (see p. 25)	-
			Magnesium	-	5728 17 (see p. 25)	-
	UTP	1 module	White	5723 49 (see p. 21)	5723 02 (see p. 25)	5723 03 (see p. 29)
			Magnesium	5728 49 (see p. 21)	5728 02 (see p. 25)	5728 03 (see p. 29)
			With orange shutter	White	5723 58 (see p. 21)	5723 54 (see p. 25)
			With orange shutter	Magnesium	5728 58 (see p. 21)	5728 54 (see p. 25)
			With green shutter	White	5723 59 (see p. 21)	5723 55 (see p. 25)
			With green shutter	Magnesium	5728 59 (see p. 21)	5728 55 (see p. 25)
		2 modules	White	-	-	5723 15 (see p. 29)
			Magnesium	-	-	5728 15 (see p. 29)
	2 modules - with controlled access	Square version	White	-	5723 14 (see p. 25)	-
		Square version	Magnesium	-	5728 14 (see p. 25)	-
		With red shutter	White	5723 57 (see p. 21)	5723 53 (see p. 25)	-
		With red shutter	Magnesium	5728 57 (see p. 21)	5728 53 (see p. 25)	-
		4 modules - retractable RJ 45 sockets	White	-	5723 39 (see p. 25)	-
			Magnesium	-	5728 39 (see p. 25)	-
	FTP	1 module	White	-	5723 22 (see p. 25)	5723 04 (see p. 29)
			Magnesium	-	5728 22 (see p. 25)	5728 04 (see p. 29)
		2 module	White	-	5723 16 (see p. 25)	-
			Magnesium	-	5728 16 (see p. 25)	-

ARTEOR RANGE FEEDTHROUGH SOCKETS

				Cat. 6	Cat. 5e
	UTP	Socket with copper feedthrough	White	5723 31 (see p. 25)	5723 30 (see p. 29)
			Magnesium	5728 31 (see p. 25)	5728 30 (see p. 29)
	FTP	Socket with copper feedthrough	White	5723 33 (see p. 25)	5723 32 (see p. 29)
			Magnesium	5728 33 (see p. 25)	5728 32 (see p. 29)

Legrand cabling system LCS³ Cat. 8

flat equipped patch panel

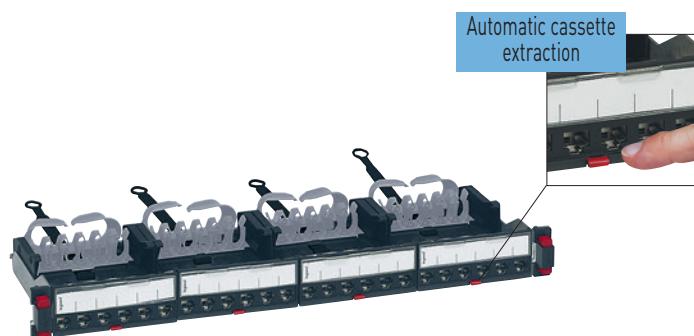

0337 82




Selection chart **p. 10**
Equipment and accessories **p. 16**
Technical information **p. 31-33**

Pack	Cat. Nos.	Cat. 8 patch panel equipped with 24 RJ 45 connectors
1	0337 82	<p>Conforms to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panel ensures automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Equipped with 4 cassettes of 6 Cat. 8 RJ 45 LCS³ quick-connect connectors (no tools required), with 568 A/B marking</p> <p>Supplied with coloured labels</p> <p>19" patch panel - 1U</p> <p>Automatic cassette removal using push button</p> <p>Possibility of individual extraction of each connector</p> <p>Flat panel</p> <p>STP panel - metal shielding</p>

Legrand cabling system LCS³ Cat. 8

flat patch panels to be equipped

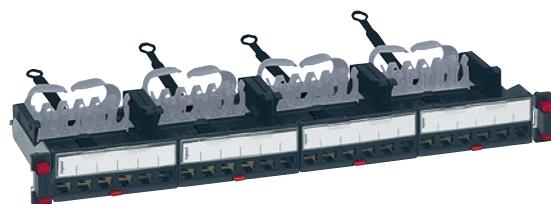

0337 90

Selection chart **p. 10**
Equipment and accessories **p. 16**
Technical information **p. 31-33**

Pack	Cat. Nos.	Flat 24-connector patch panels - 1U to be equipped
1	0337 90	<p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panels ensure automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Flat panel with empty cassettes to be equipped with connectors</p> <p>Equipped with 4 automatic extraction cassette for Cat. 5e to Cat. 8 RJ 45 connectors</p> <p>19" patch panel - 1U</p>
1	0337 91	<p>Empty flat panel to be equipped with cassette</p> <p>Can accept a maximum of 4 automatic extraction cassettes:</p> <ul style="list-style-type: none"> - copper - fibre optic <p>19" patch panel - 1U</p>

Legrand cabling system LCS³ Cat. 8

angled patch panel to be equipped with connectors



0337 92



0337 85

Selection chart p. 10, 11

Equipment and accessories opposite

Technical information p. 31-33

Pack	Cat. Nos.	Angled 24-connector patch panel - 1U
1	0337 92	<p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panel ensures automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Angled panel to be equipped with connectors</p> <p>Can accept up to 24 Cat. 5e to Cat. 8 RJ 45 connectors</p> <p>19" panel - 1U</p>
1	0337 85	<p>Cat. 8 RJ 45 connectors for flat and angled STP panel</p> <p>Conforms to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards</p> <p>Quick-connect connection (no tools required), with 568 A/B marking</p> <p>Supplied with coloured labels</p> <p>Set of 6 RJ 45 connectors</p> <p>For installation in the cassettes of flat or angled panels</p>

Legrand cabling system LCS³ Cat. 8

equipment and accessories



0337 56



0337 59



0337 55



0337 57



0337 58

Selection chart p. 11

Technical information p. 31-33

Pack	Cat. Nos.	Common accessories for flat and angled panels
10	0337 56	Port blanking modules Divisible 6 port blanking plate For sealing from 1 to 6 ports
1	0337 59	Cord management 2 cord management for use with new generation Quick-Fix Provides side cord management
Specific accessories for flat panels		
1	0337 55	Cassette for flat panels to be equipped Empty removable cassette to be equipped with connectors. Can accept 6 Cat. 5e to Cat. 8 connectors Extraction using push button making installation and maintenance easier
1	0337 57	Blanking cassette Used to blank the panel
Specific accessories for angled panels		
1	0337 58	Angled panel cover For optimised management of the air flow inside the cabinet

Legrand cabling system LCS³ Cat. 8

cables and patch cords



0337 88



0337 03



0518 90



Selection chart **p. 12-13**
Technical information **p. 31-33**

Pack	Cat. Nos.
500 ⁽¹⁾	0337 88

Cat. 8 local network cables

Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
4 twisted pair cables, 100 Ω
LSOH sheath: halogen-free
EIA/TIA colour code

S/FTP - 4 pairs

Performance 2000 MHz
Length 500 m
Supplied on reel. Weight 45 kg

(1) in metre(s)

Pack	Cat. Nos.
	LSZH RAL 6027
1	0337 01
1	0337 02
1	0337 03
1	0337 04
1	0337 05
1	0337 06
1	0337 07
	LSZH
RAL 3020	RAL 6026
1	0337 21
1	0337 22
1	0337 23
1	0337 24
1	0337 25
1	0337 26
1	0337 27

Cat. 8 RJ 45 patch cords

Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
RJ 45/RJ 45 flat
With special 'easy grip' plug

S/FTP shielded impedance 100 Ω

Length (m)

0.5 m
1 m
2 m
3 m
5 m
8 m
10 m


1	0518 90
---	---------

Marking kit

Kit of 200 coloured rings for marking
RJ 45 cords
Rings to be clipped to the patch cords
50 of each colour

Legrand cabling system LCS³ Cat. 6A

flat equipped patch panels

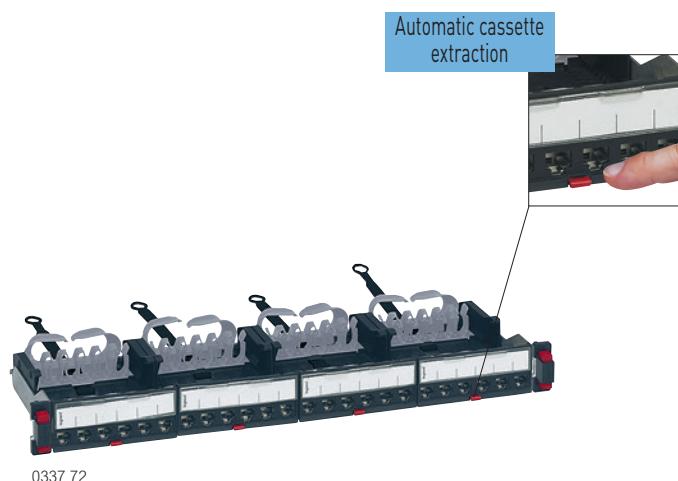


Selection chart p. 10
Equipment and accessories p. 19
Technical information p. 31-33

Pack	Cat. Nos.	Cat. 6A patch panels equipped with 24 RJ 45 connectors
1 1	0337 70 0337 72	<p>Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panels ensure automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Equipped with 4 cassettes of 6 Cat. 6A RJ 45 LCS³ quick-connect connectors (no tools required), with 568 A/B marking</p> <p>Supplied with coloured labels</p> <p>19" panel - 1U</p> <p>Automatic cassette extraction using push button</p> <p>Flat panels</p> <p>24 RJ 45 connectors - 1U</p> <p>UTP</p> <p>STP</p>

Legrand cabling system LCS³ Cat. 6A

flat patch panels to be equipped

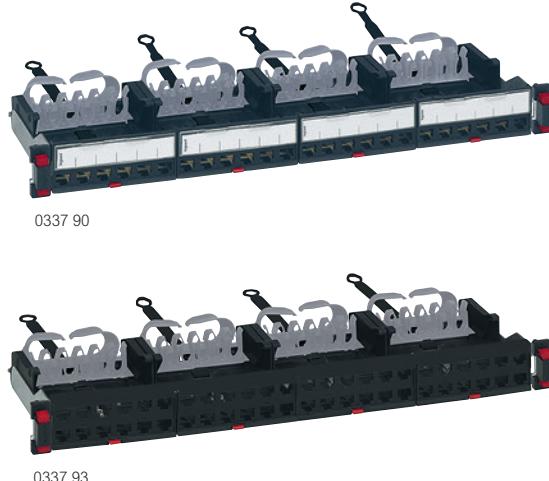

Selection chart p. 10
Equipment and accessories p. 19
Technical information p. 31-33

Pack	Cat. Nos.	Flat 24-connector patch panels - 1U to be equipped
1	0337 90	<p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panels ensure automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Flat panel with empty cassettes to be equipped with connectors</p> <p>Equipped with 4 cassettes for Cat. 5e to Cat. 8 RJ 45 connectors</p> <p>19" panel - 1U</p>
1	0337 91	<p>Empty flat panel to be equipped with cassettes</p> <p>Can accept a maximum of 4 cassettes:</p> <ul style="list-style-type: none"> - copper - fibre optic <p>19" panel - 1U</p>
1	0337 93	<p>Flat high density 48-connector patch panel - 1 U to be equipped</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panel ensures automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Automatic cassette extraction using push button</p> <p>Possibility of removing each connector individually</p> <p>19" panel - 1U</p>

Legrand cabling system LCS³ Cat. 6A

angled patch panels to be equipped with connectors



0337 92



0337 94



0337 75



Selection chart p. 10-11


Equipment and accessories opposite

Technical information p. 31-33

Pack	Cat. Nos.	
1	0337 92	<p>Angled 24-connector patch panel - 1U</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panel ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance</p> <p>Angled panel to be equipped with connectors Can accept up to 24 Cat. 5e to Cat. 8 RJ 45 connectors 19" panel - 1U</p>
1	0337 94	<p>Angled high density 48-connector patch panel - 1U to be equipped</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panel ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance</p> <p>Angled panel to be equipped with connectors Can accept up to 48 Cat. 5e to Cat. 6A RJ 45 connectors 19" panel - 1U</p>
1 1	0337 73 0337 75	<p>High density Cat. 6A RJ 45 connectors</p> <p>Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards Cat. 6A RJ 45 connectors for flat and angled STP panels Quick-connect connection (no tools required), with 568 A/B marking Supplied with coloured labels For equipment to be installed in the cassettes of flat or angled panels Set of 6 Cat. 6A RJ 45 connectors UTP STP</p>

Legrand cabling system LCS³ Cat. 6A

equipment and accessories



0337 56



0337 59



0337 55



0337 57



0337 58

Pack	Cat. Nos.
10	0337 56
1	0337 59

Selection chart p. 10-11

Technical information p. 31-33

Common accessories for flat and angled panels

Port blanking modules

Divisible 6 port blanking plate
For sealing from 1 to 6 ports

Cord management

2 cord management for use with new generation Quick-Fix
Provides side cord management

Specific accessories for flat panels

Cassette for flat panels to be equipped

Empty extractable cassette to be equipped with connectors. Can accept 6 Cat. 5e to Cat. 8 connectors
Extraction using push button making installation and maintenance easier
Possibility of removing each connector individually

High density cassette for flat panels to be equipped

Empty extractable cassette to be equipped with connectors. Can accept 12 Cat. 5e to Cat. 6A connectors
Extraction using push button making installation and maintenance easier

Blanking cassette

Used to blank the panel

Pack	Cat. Nos.
1	0337 55
1	0337 95
1	0337 57

Specific accessories for angled panels

Angled panel cover

For optimised management of the air flow inside the cabinet

Legrand cabling system LCS³ Cat. 6A

cables and patch cords



0327 77



Plug convenient
for gripping



0517 82



0518 90



Selection chart p. 12-13
Technical information p. 31-33

Pack	Cat. Nos.	Cables for local networks Cat. 6A
500 ⁽¹⁾	0327 78	<p>LSZH</p> <p>F/UTP - 4 pairs Performance 500 MHz Length 500 m Supplied on reel. Weight 25 kg</p> <p>F/UTP - 2 x 4 pairs Performance 500 MHz Length 500 m Supplied on reel. Weight 65 kg</p> <p>F/FTP - 4 pairs Performance 500 MHz Euroclass C_{ca} Length 500 m Supplied on reel. Weight 25 kg</p> <p>F/FTP - 2 x 4 pairs Performance 500 MHz Length 500 m Supplied on reel. Weight 25.2 kg</p> <p>U/FTP - 4 pairs Performance 500 MHz Length 500 m Supplied on reel. Weight 62 kg</p> <p>U/FTP - 2 x 4 pairs Performance 500 MHz Length 500 m Supplied on reel. Weight 25 kg</p> <p>S/FTP - 4 pairs Performance 600 MHz Euroclass D_{ca} Length 500 m Supplied on reel. Weight 30 kg</p> <p>S/FTP - 2 x 4 pairs Performance 600 MHz Euroclass D_{ca} Length 500 m Supplied on reel. Weight 58 kg</p> <p>S/FTP - 4 pairs Performance 600 MHz Euroclass B2_{ca} Length 500 m Supplied on reel. Weight 30 kg</p>
500 ⁽¹⁾	0328 78	
500 ⁽¹⁾	0328 83	
500 ⁽¹⁾	0327 99	
500 ⁽¹⁾	0327 98	
500 ⁽¹⁾	0328 84	
500 ⁽¹⁾	0328 85	
500 ⁽¹⁾	0327 77 ⁽²⁾	
500 ⁽¹⁾	0327 79 ⁽²⁾	
500 ⁽¹⁾	0328 82 ⁽²⁾	

(1) in metre(s)

(2) Cat. 7

Pack	Cat. Nos.	RJ 45 patch cords and user cords Cat. 6A
1	0518 82	PVC
1	0518 83	
1	0518 84	
1	0518 85	
1	0518 78	LSZH
1	0518 79	
1	0518 80	
1	0518 81	
1	0518 16	PVC
1	0517 80	
1	0517 81	
1	0517 82	
1	0517 83	
1	0518 70	LSZH
1	0518 71	
1	0518 72	
1	0518 73	
1	0518 66	PVC
1	0518 67	
1	0518 68	
1	0518 69	

Marking kit

Kit of 200 coloured rings for marking RJ 45 cords
Rings to be clipped to the patch cords
50 of each colour

Legrand cabling system LCS³ Cat. 6A

RJ 45 sockets - Arteor



5 723 06



5 723 50



5 728 49



Selection chart p. 14

Mechanisms supplied with square rocker plates, to be equipped with support frames and plates

Can be integrated in all supports

With LCS³ connector with fast connection thanks to integrated crimping take AWG 22 single-core cables up to AWG 26 and AWG multicore cables

Contacts marked with dual colour code and wiring schemes T568 A and T 568 B

Conform to standards ISO/IEC 11801 Ed. 3.0, EN 50173-1 and TIA/EIA 568 C

Pack	Cat. Nos.	Arteor RJ 45 sockets cat. 6A
		360° metal shielding
		STP - 1 module
10	5723 06	<input type="radio"/> White
10	5728 06	<input checked="" type="radio"/> Magnesium
10	5723 51	<input type="radio"/> White with orange shutter
10	5728 51	<input checked="" type="radio"/> Magnesium with orange shutter
10	5723 52	<input type="radio"/> White with green shutter
10	5728 52	<input checked="" type="radio"/> Magnesium with green shutter
		STP with controlled access - 2 modules
5	5723 50	<input type="radio"/> White with red shutter
5	5728 50	<input checked="" type="radio"/> Magnesium with red shutter
		UTP - 1 module
10	5723 49	<input type="radio"/> White
10	5728 49	<input checked="" type="radio"/> Magnesium
10	5723 58	<input type="radio"/> White with orange shutter
10	5728 58	<input checked="" type="radio"/> Magnesium with orange shutter
10	5723 59	<input type="radio"/> White with green shutter
10	5728 59	<input checked="" type="radio"/> Magnesium with green shutter
		UTP with controlled access - 2 modules
5	5723 57	<input type="radio"/> White with red shutter
5	5728 57	<input checked="" type="radio"/> Magnesium with red shutter




For details of full range of Arteor support frames

and plates

Contact us on +44 (0) 370 608 9020

Legrand cabling system LCS³ Cat. 6

flat equipped patch panels

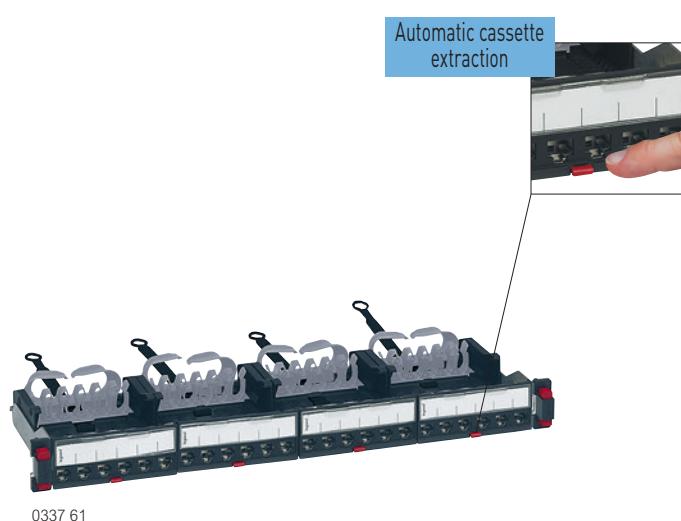


0337 61

Automatic cassette extraction

Legrand cabling system LCS³ Cat. 6

flat patch panels to be equipped

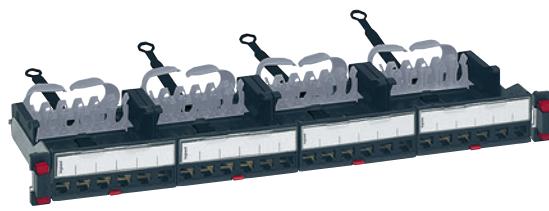

0337 90



0337 93



Selection chart p. 10
Equipment and accessories p. 23
Technical information p. 31-33

Pack	Cat. Nos.	Cat. 6 patch panels equipped with 24 RJ 45 connectors
1	0337 60	Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panels ensure automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance Equipped with 4 cassettes of 6 Cat. 6 RJ 45 LCS ³ quick-connect connectors (no tools required), with 568 A/B marking Supplied with numbered coloured labels 19" panel -1U Automatic cassette extraction using push button
1	0337 61	Flat panels 24 RJ 45 connectors - 1U UTP
1	0337 62	FTP STP



Selection chart p. 10
Equipment and accessories p. 23
Technical information p. 31-33

Pack	Cat. Nos.	Flat 24-connector patch panels - 1U to be equipped
1	0337 90	Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panels ensure automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance
1	0337 91	Flat panel with empty cassettes to be equipped with connectors Equipped with 4 automatic extraction cassettes for Cat. 5e to Cat. 8 RJ 45 connectors 19" panel - 1U
1	0337 93	Empty flat panel to be equipped with cassettes Can accept a maximum of 4 automatic extraction cassettes: - copper - fibre optic Flat high density 48-connector patch panel - 1U to be equipped Universal mounting on any cabinet or enclosure Panel ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance Automatic cassette extraction using push button Possibility of removing each connector individually 19" panel - 1U

Legrand cabling system LCS³ Cat. 6

angled patch panels to be equipped with connectors



0337 92




0337 94



0337 63

Legrand cabling system LCS³ Cat. 6

equipment and accessories



0337 56



0337 59



0337 55



0337 57



0337 58



Selection chart p. 10-11
Equipment and accessories **opposite**
Technical information **p. 31-33**

Pack	Cat. Nos.	Angled 24-connector patch panels - 1U
1	0337 92	<p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panel ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance</p> <p>Angled panel to be equipped with connectors Can accept up to 24 Cat. 5e to Cat. 8 RJ 45 connectors 19" panel - 1U</p>
1	0337 94	<p>Angled high density 48-connector patch panel - 1U to be equipped</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Panel ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance</p> <p>Angled panel to be equipped with connectors Can accept up to 48 Cat. 5e to Cat. 6A RJ 45 connectors 19" panel - 1U</p>
1	0337 63	Cat. 6 high density RJ 45 connectors
1	0337 64	Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
1	0337 65	Cat. 6 RJ 45 connectors for flat and angled panels Quick-connect connection (no tools required), with 568 A/B marking Supplied with coloured labels For equipment to be installed in the cassettes of flat or angled panels Set of 6 Cat. 6 RJ 45 connectors




Selection chart p. 11
Technical information **p. 31-33**


Pack	Cat. Nos.	Common accessories for flat and angled panels
10	0337 56	Port blanking modules Divisible 6 port blanking plate For sealing from 1 to 6 ports
1	0337 59	Cord management 2 cord management for use with new generation Quick-Fix Provides side cord management
1	0337 55	Specific accessories for flat panels
1	0337 95	Cassette for flat panels to be equipped Empty extractable cassette to be equipped with connectors Can accept 6 Cat. 5e to Cat. 8 connectors Extraction using push button making installation and maintenance easier
1	0337 57	High density cassette for flat panels to be equipped Empty extractable cassette to be equipped with connectors Can accept 12 Cat. 5e to Cat. 6A connectors Extraction using push button making installation and maintenance easier
1	0337 58	Blanking cassette Used to blank the panel
1	0337 58	Specific accessories for angled panels
1	0337 58	Angled panel cover For optimised management of the air flow inside the cabinet

Legrand cabling system LCS³ Cat. 6


cables and patch cords

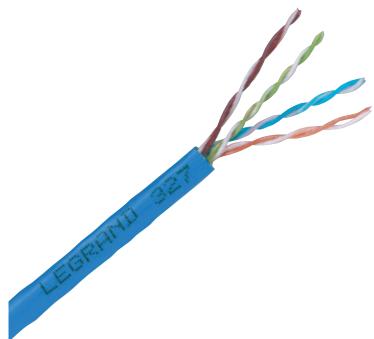

0327 54

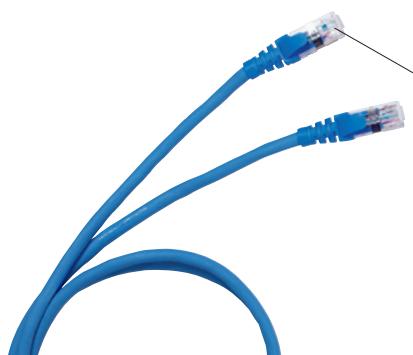

0517 62

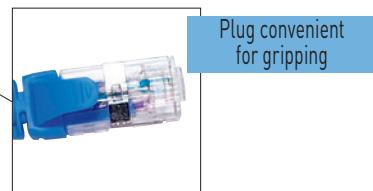

0518 90

Selection chart p. 12-13
Technical information p. 31-33

Pack	Cat. Nos.	
305 ⁽¹⁾	LSZH 0327 54	PVC
500 ⁽¹⁾	0328 61	
305 ⁽¹⁾	0327 55	
305 ⁽¹⁾	0328 56	
500 ⁽¹⁾	0327 56	
305 ⁽¹⁾	0328 57	
500 ⁽¹⁾	0327 58	
500 ⁽¹⁾	0327 76	
500 ⁽¹⁾	0327 59	

Cables for local networks Cat. 6

Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C
Cables 4 pairs or 2 x 4 twisted pairs 100 Ω
Blue RAL 5015
Colour code TIA/EIA

U/UTP - 4 pairs
Length 305 m
Supplied in cardboard box. Weight 16 kg

Length 500 m
Supplied on reel. Weight 18 kg

Length 305 m
Supplied in cardboard box. Weight 13 kg

F/UTP - 4 pairs
Length 305 m
Supplied on reel. Weight 17 kg

Length 500 m
Supplied on reel. Weight 25 kg

F/UTP - 4 pairs
Length 305 m
Supplied in cardboard box. Weight 17 kg

Length 500 m
Supplied on reel. Weight 25 kg

F/UTP - 2 x 4 pairs
Length 500 m
Supplied on reel. Weight 48 kg

SF/UTP - 4 pairs
Length 500 m
Supplied on reel. Weight 30 kg

	PVC
1	0518 18
1	0517 72
1	0517 73
1	0517 74
1	0517 75

RJ 45 patch cords and user cords Cat. 6

U/UTP unscreened impedance 100 Ω
RJ 45 - RJ 45 right
Length (m)

0.5 m
1 m
2 m
3 m
5 m

(1) in metre(s)

Pack	Cat. Nos.
	LSZH
1	RAL 3020
1	0518 62
1	0518 63
1	0518 64
1	0518 65
	PVC
1	0518 15
1	0517 62
1	0517 63
1	0517 64
1	0517 65
	LSZH
1	RAL 3020
1	0518 54
1	0518 55
1	0518 56
1	0518 57
	PVC
1	0517 52
1	0517 53
1	0517 54
1	0517 55

RJ 45 patch cords and user cords Cat. 6 (continued)

U/UTP unscreened impedance 100 Ω (continued)
RJ 45 - RJ 45 right
Length (m)

1 m
2 m
3 m
5 m

F/UTP screened impedance 100 Ω
RJ 45 - RJ 45 right
Length (m)

0.5 m
1 m
2 m
3 m
5 m

S/FTP shielded impedance 100 Ω
Length (m)

1 m
2 m
3 m
5 m

1	0518 90
---	---------

Marking kit

Kit of 200 coloured rings for marking RJ 45 cords
Rings to be clipped to the patch cords
50 of each colour

Legrand cabling system LCS³ Cat. 6

RJ 45 sockets - Arteor



5728 02



5728 16

Legrand cabling system LCS³ Cat. 6

feedthrough sockets - Arteor



5723 31

Selection chart p. 14

Can be integrated in all supports

With LCS³ connector with fast connection thanks to integrated crimping take AWG 22 single-core cables up to AWG 26 and AWG multicore cables

Contacts marked with dual colour code and wiring schemes T568 A and T 568 B

Conform to standards ISO/IEC 11801 Ed. 3.0, EN 50173-1 and TIA/EIA 568 C

Pack	Cat. Nos.	Arteor RJ 45 sockets Cat. 6
		Mechanisms supplied with square rocker plates, to be equipped with support frames and plates
10	5723 02	UTP - 1 module <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 02	
10	5723 54	<input type="radio"/> White with orange shutter
10	5728 54	<input checked="" type="radio"/> Magnesium with orange shutter
10	5723 55	<input type="radio"/> White with green shutter
10	5728 55	<input checked="" type="radio"/> Magnesium with green shutter
10	5723 14	UTP - 2 modules <input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version
10	5728 14	
5	5723 53	UTP with controlled access - 2 modules <input type="radio"/> White with red shutter
5	5728 53	<input checked="" type="radio"/> Magnesium with red shutter
1	5723 39	UTP retractable RJ 45 sockets - 4 modules With integrated retractable cord (0.9 m) Winds up automatically with a pushbutton <input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5728 39	
10	5723 22	FTP - 1 module <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 22	
10	5723 16	FTP - 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 16	
10	5723 23	Shielded STP - 1 module <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 23	
10	5723 17	Shielded STP - 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 17	



For details of full range of Arteor support frames and plates

Contact us on +44 (0) 370 608 9020

Selection chart p. 14

Certified as conforming to standards ISO 11801 ed. 3.0, EN 50173-1 and EIA/TIA 568

Contacts marked with 568 A and B dual colour code and numbers

Connectors with self-stripping terminals

Possibility of re-wiring in the event of error

Multidirectional cable entry


For use with area distribution boxes, connection to boxes via RJ 45-RJ 45 dedicated cords

Used to create Cat. 6 and Cat. 5e links in accordance with standards 2 modules

Pack	Cat.Nos	Sockets with copper feedthrough Cat. 6
10	5723 31	Cat. 6 UTP - Arteor <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 31	
10	5723 33	Cat. 6 FTP - Arteor <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 33	

Legrand cabling system LCS³ Cat. 5e

flat equipped patch panels

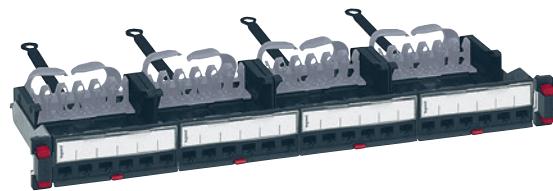

0337 51




Equipment and accessories **p. 27**
Technical information **p. 31-33**


Pack	Cat. Nos.	Cat. 5e patch panels equipped with 24 RJ 45 connectors
1 1	0337 50 0337 51	<p>Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panels ensure automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Equipped with 4 cassettes of 6 Cat. 5e RJ 45 LCS³ quick-connect connectors (no tools required), with 568 A/B marking</p> <p>Supplied with coloured labels</p> <p>19" panel - 1U</p> <p>Automatic cassette extraction using push button</p> <p>Possibility of removing each connector individually</p> <p>Flat panel</p> <p>24 RJ 45 connectors - 1U</p> <p>UTP</p> <p>FTP</p>

Legrand cabling system LCS³ Cat. 5e

flat patch panels to be equipped

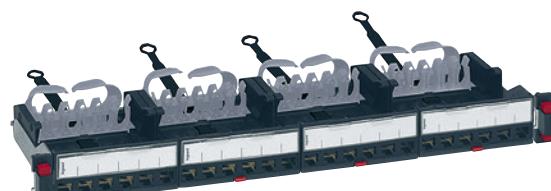

0337 90

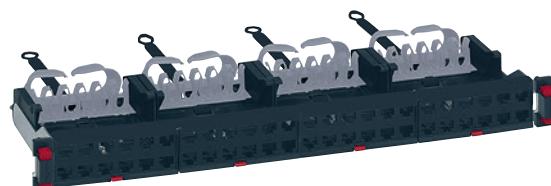

0337 93

Pack	Cat. Nos.	Equipment and accessories p. 27 Technical information p. 31-33
1	0337 90	<p>Flat 24-connector patch panels - 1U to be equipped</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Universal mounting on any cabinet or enclosure</p> <p>Panels ensure automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Flat panel with empty cassettes to be equipped with connectors</p> <p>Equipped with 4 automatic extraction cassettes for Cat. 5e to Cat. 8 RJ 45 connectors</p> <p>19" panel - 1U</p> <p>Empty flat panel to be equipped with cassettes</p> <p>Can accept a maximum of 4 automatic extraction cassettes:</p> <ul style="list-style-type: none"> - copper - fibre optic <p>19" panel - 1U</p>

Pack	Cat. Nos.	Flat high density 48-connector patch panel - 1U to be equipped
1	0337 93	<p>Universal mounting on any cabinet or enclosure</p> <p>Panel ensures automatic earthing of each connector</p> <p>Equipped with rear cable guide to hold the cables during maintenance</p> <p>Automatic cassette extraction using push button</p> <p>19" panel - 1U</p>

Legrand cabling system LCS³ Cat. 5e

angled patch panels to be equipped with connectors



0337 92



0337 94



Equipment and accessories **opposite**
Technical information **p. 31-33**

Pack	Cat. Nos.
1	0337 92

Angled 24-connector patch panel - 1U

Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures
Universal mounting on any cabinet or enclosure
Panel ensures automatic earthing of each connector
Equipped with rear cable guide to hold the cables during maintenance

Angled panel to be equipped with connectors

Can accept up to 24 Cat. 5e to Cat. 8 RJ 45 connectors
19" panel - 1U

Pack	Cat. Nos.
1	0337 94

Angled high density 48-connector patch panel - 1U to be equipped

Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures
Universal mounting on any cabinet or enclosure
Panel ensures automatic earthing of each connector
Equipped with rear cable guide to hold the cables during maintenance

Angled panel to be equipped with connectors
Can accept up to 48 Cat. 5e to Cat. 6A RJ 45 connectors
19" panel - 1U

Pack	Cat. Nos.
1	0337 53 0337 54

Cat. 5e high density RJ 45 connectors

Conform to ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
Cat. 5e RJ 45 connectors for flat and angled panel
Quick-connect connection (no tools required), with 568 A/B marking
Supplied with coloured labels
For equipment to be installed in the cassettes of flat or angled panels
Set of 6 Cat. 5e RJ 45 connectors
UTP
FTP

Legrand cabling system LCS³ Cat. 5e

equipment and accessories



0337 56



0337 59



0337 55




0337 53



0337 57



0337 58



Technical information **p. 31-33**

Pack	Cat. Nos.
10	0337 56
1	0337 59

Common accessories for flat and angled panels

Port blanking modules

Divisible 6 port blanking plate
For sealing from 1 to 6 ports

Cord management

2 cord management for use with new generation Quick-Fix
Provides side cord management

Pack	Cat. Nos.
1	0337 55
1	0337 95
1	0337 57

Specific accessories for flat panels

Cassette for flat panels to be equipped

Empty extractable cassette to be equipped with connectors. Can accept 6 Cat. 5e to Cat. 8 connectors
Extraction using push button making installation and maintenance easier

High density cassette for flat panels to be equipped

Empty extractable cassette to be equipped with connectors. Can accept 12 Cat. 5e to Cat. 6A connectors
Extraction using push button making installation and maintenance easier

Blanking cassette

Used to blank the panel

Pack	Cat. Nos.
1	0337 58


Specific accessories for angled panels

Angled panel cover

For optimised management of the air flow inside the cabinet

Legrand cabling system LCS³ Cat. 5e

cables and patch cords

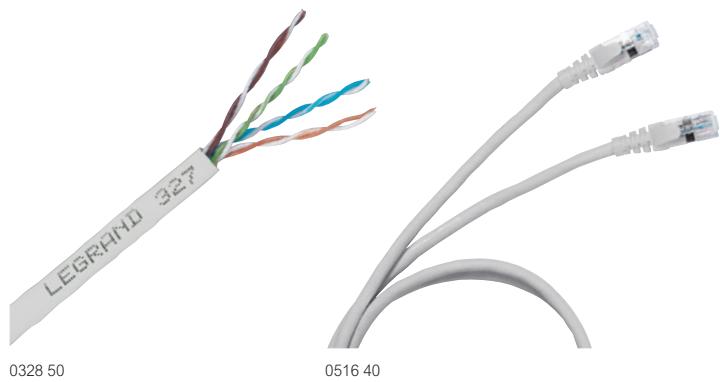

Technical information p. 31-33

Cables for local networks Cat. 5e			Pack	Cat. Nos.	RJ 45 patch cords and user cords Cat. 5e
		4 twisted pair cables 100 Ω LSZH sheath: halogen-free Grey RAL 7035 Colour code TIA/EIA			U/UTP unscreened impedance 100 Ω RJ 45 - RJ 45 right Grey RAL 7035 Length (m) 0.5 m 1 m 2 m 3 m 5 m
305 ⁽¹⁾	LSZH 0327 50	PVC	1	0518 17	F/UTP screened impedance 100 Ω RJ 45 - RJ 45 right Grey RAL 7035 Length (m) 0.5 m 1 m 2 m 3 m 5 m
500 ⁽¹⁾	0328 53		1	0516 36	
305 ⁽¹⁾	0327 51		1	0516 37	
			1	0516 38	
			1	0516 39	
305 ⁽¹⁾	0327 52				Marking kit
500 ⁽¹⁾	0328 50		1	0518 14	Kit of 200 coloured rings for marking RJ 45 cords. Rings to be clipped to the patch cords 50 of each colour
305 ⁽¹⁾	0327 53		1	0516 40	
			1	0516 41	
			1	0516 42	
			1	0516 43	
(1) in metre(s)					

Legrand cabling system LCS³ Cat. 5e

RJ 45 sockets - Arteor



Selection chart p. 14

Can be integrated in all supports

With LCS³ connector with fast connection thanks to integrated crimping
Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables

Contacts marked with dual colour code and wiring schemes T568 A and T 568 B

Conform to standards ISO/IEC 11801 Ed. 3.0, EN 50173-1 and TIA/EIA 568 C

Pack	Cat.Nos	Arteor RJ 45 sockets cat. 5e
		Mechanisms supplied with square rocker plates, to be equipped with support frames and plates
10	5723 03	UTP - 1 module <input type="radio"/> White <input checked="" type="radio"/> Aluminium
10	5728 03	UTP - 2 modules <input type="radio"/> White <input checked="" type="radio"/> Aluminium
10	5723 15	FTP - 1 module <input type="radio"/> White <input checked="" type="radio"/> Aluminium
10	5728 15	
10	5723 04	
10	5728 04	



For details of full range of Arteor support frames and plates

Contact us on +44 (0) 370 608 9020

Legrand cabling system LCS³ Cat. 5e

feedthrough sockets - Arteor



5723 31



Selection chart p. 14

Certified as conforming to standards ISO 11801 ed. 3.0, EN 50173-1 and EIA/TIA 568

Contacts marked with 568 A and B dual colour code and numbers

Connectors with self-stripping terminals

Possibility of re-wiring in the event of error

Multidirectionnal cable entry

For use with area distribution boxes, connection to boxes via RJ 45-RJ 45 dedicated cords

Used to create Cat. 6 and Cat. 5e links in accordance with standards 2 modules

Pack	Cat.Nos	Sockets with copper feedthrough Cat. 5e
10	5723 30	Cat. 5e UTP - Arteor <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 30	
10	5723 32	Cat. 5e FTP - Arteor <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5728 32	

Legrand cabling system LCS³

accessories for Cat. 6 and Cat. 5e



0327 60



0517 09

Pack	Cat. Nos.	Description	Pack	Cat. Nos.	Description
		Cable protection accessories Conform to standards of the IEC 60603-7 series and to standard IEC 61076-3-106 (version 5) Plastic material IP 66/67 guaranteed connection with the pair Cat. No. 0533 02 IP 55 with no connection for base with blank Protection for RJ 45 shielded or unshielded cables ensuring a link of Cat. 5 Compatible with products on the market conforming to the standards listed			Stripping tool Slits the sheath and releases the conductors by rotation For twisted pair cables Does not damage the conductors
3	0533 00	Plug Integrated PE with sealing ring and clamping blades Tool-free assembly Ability to protect cables of Cat. 5e	1	0332 62	Stripper For twisted pair and fibre optic cable
3	0533 01	Flush-mounting base Locking base Supplied with RJ 45 female/female coupler Cat. 5e	1	0327 60	Cutting pliers Cut wires cleanly without damaging the copper
3	0533 02	Kit Flush-mounting base and plug			Crimping tool for RJ 45 plugs Used for crimping plugs RJ 4/6/8/9 contacts Ratchet control of crimping mechanism Able to cut and strip cables Tool with 3 crimping points High resistance steel material
3	0533 03	Protective shutter Fits on base Cat. No. 0533 01			
		RJ plugs for round cables Gold-coated contacts 1.2 µm			
50	0517 03	RJ 45 Cat. 5e 8 contacts, width 11.70 mm			
50	0517 04	9 contacts, width 11.70 mm			
50	0517 06	RJ 45 sleeves Black			
50	0517 07	White			



Legrand cabling system LCS³ copper system

technical information

Performance table

Supported network protocol	SIZES OF COMPONENTS				LINK SIZES (CHANNEL)				
	Cat. 8 STP	Cat. 6A STP	Cat. 6 UTP	Cat. 6 FTP	Class I	Class EA		Class E	
	2000 MHz	500 MHz	250 MHz	250 MHz	2000 MHz	500 MHz	250 MHz	250 MHz	
	40 Giga	10 Giga	1 Giga	1 Giga	40 Giga	10 Giga	1 Giga	1 Giga	
Attenuation (dB) Signal loss	LCS ³ ISO 11801 edition 3	1.5	0.13 0.45 max	0.06 0.32 max	0.09 0.32 max	32.7	35.4 42.1 max	24.1 28.9 max	25.7 30.7 max
Return loss (dB) Resistance to echo	LCS ³ ISO 11801 edition 3	1.2	17.05 14 min	26.59 20 min	29.8 16 min	8	16.4 8 min	22.1 10 min	38.8 10 min
Next (dB) Resistance to disturbances between pairs	LCS ³ ISO 11801 edition 3	12.9	37.46 37 min	56.93 46 min	51.3 46 min	9.8	38.1 29.2 min	54 35.3 min	53.9 35.3 min



Compliance with LCS³ system standards and approvals

The LCS³ system and its components (de-embedded) comply with the current standards:

- EIA/TIA 568 B.2.10
- EN 50173-1 and EN 50173-2
- ISO/IEC 11801 edition 3

The LCS³ system supports 10 G applications

Base T up to 100 m in a transmission channel in compliance with ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards


The class I link of the LCS³ system is also compliant with ISO/IEC 11801 edition 3.0 and EIA/TIA 568 C2-1 standards. LCS³ systems are certified by the independent lab 3P, a point of reference for the sector



New denominations of LAN cables (according to ISO 11801-2)

They indicate: "Type of cable shielding" / "type of twisted pair shielding" followed by TP (twisted pairs)

Cable type	Cable shielding	Twisted pair shielding
old denomination	new denomination	
SSTP	S/FTP	S: screen consisting of a copper braid
SFTP	SF/UTP	SF: ribbon + braid association
STP	U/FTP	U: no screen
FTP	F/FTP	F: screen consisting of alu/polyester ribbon
FTP	F/UTP	F: screen consisting of alu/polyester ribbon
UTP	U/UTP	U: no screen



25-year guarantee: Legrand guarantees the long term performance of the LCS³ system
www.legrand.co.uk

Main characteristics of LCS³ systems

	LCS ³ 8	LCS ³ 6A	LCS ³ 6	LCS ³ 5e
Frequency	2000 MHz	500 MHz	250 MHz	100 MHz
Delivery	40 Gbit/s	10 Gbit/s	1 Gbit/s	1 Gbit/s
Wiring	Copper	Copper	FO	Copper
Connectors	RJ 45	RJ 45	SC-LC...	RJ 45
Max. cable length	30 m	100 m	variable	100 m

Maintenance performance



Legrand guarantees the long-term performance of the LCS³ system by providing a 25-year performance guarantee



All dimensions (mm) are nominal

Legrand cabling system LCS³ copper system (continued)

technical information

Euroclass classification

Cat. Nos.	Description	Euroclass (A _{ca} ; B1 _{ca} ; B2 _{ca} ; C _{ca} ; D _{ca} ; E _{ca} ; F _{ca})	Additional criteria (smoke production, flaming droplets, acidity)		
			s1, s1a, s1b, s2, s3	d0, d1, d2	a1, a2, a3
0327 50	CABLE Cat. 5e U/UTP 4P LSZH	D _{ca}	s2	d2	a1
0327 51	CABLE Cat. 5e U/UTP 4P PVC	E _{ca}	-	-	-
0327 52	CABLE Cat. 5e F/UTP 4P LSZH	D _{ca}	s2	d2	a1
0327 53	CABLE Cat. 5e F/UTP 4P PVC	E _{ca}	-	-	-
0327 54	CABLE Cat. 6 U/UTP 4P LSZH	D _{ca}	s2	d2	a1
0327 55	CABLE Cat. 6 U/UTP 4P PVC	E _{ca}	-	-	-
0327 56	CABLE Cat. 6 F/UTP 4P LSZH	D _{ca}	s2	d2	a1
0327 58	CABLE Cat. 6 F/UTP 4P PVC	E _{ca}	-	-	-
0327 59	CABLE Cat. 6 SF/UTP 4P PVC	E _{ca}	-	-	-
0327 76	CABLE Cat. 6 F/UTP 2x4P LSZH	D _{ca}	s2	d2	a1
0327 77	CABLE Cat. 7 S/FTP 4P LSZH	D _{ca}	s2	d1	a1
0327 78	CABLE Cat. 6A F/UTP 4P LSZH	D _{ca}	s2	d2	a1
0327 98	CABLE Cat. 6A F/FTP 2X4P LSZH	D _{ca}	s2	d2	a1
0327 99	CABLE Cat. 6A F/FTP 4P LSZH	D _{ca}	s2	d2	a1
0328 50	CABLE Cat. 5e F/UTP 4P LSZH	D _{ca}	s2	d2	a1
0328 53	CABLE Cat. 5e U/UTP 4P LSZH	D _{ca}	s2	d2	a1
0328 56	CABLE Cat. 6 F/UTP 4P LSZH	D _{ca}	s2	d2	a1
0328 61	CABLE Cat. 6 U/UTP 4P LSZH	D _{ca}	s2	d2	a1
0328 78	CABLE Cat. 6A F/UTP 2X4P LSZH	D _{ca}	s2	d2	a2
0337 88	CABLE Cat. 8 S/FTP 4P LSZH	D _{ca}	s2	d2	a1
0328 57	CABLE Cat. 6 F/UTP 4P PVC	E _{ca}	-	-	-
0328 82	CABLE Cat. 7 S/FTP 4P LSZH	B2 _{ca}	s1	d1	a1
0328 83	CABLE Cat. 6A F/FTP 4P LSZH	C _{ca}	s1	d1	a1
0327 79	CABLE Cat. 7 S/FTP 2X4P LSZH	D _{ca}	s2	d1	a1
0328 84	CABLE Cat. 6A U/UTP 4P LSZH	C _{ca}	s1	d1	a1
0328 85	CABLE Cat. 6A U/FTP 2X4P LSZH	C _{ca}	s1	d1	a1

	Euroclass	Classification criteria	Additional criteria	AV CP system (Assessment and Verification of Consistency of Performance)
Non combustible (e.g. mineral insulated)	A _{ca}	EN ISO 1716 Gross heat of combustion	-	
Low-Fire-Hazard cables (various levels)	B1 _{ca}	EN 50399 Heat release Flame spread EN 60332-1-2 Flame propagation	Smoke production (s1a, s1b, s2, s3) EN 50399 / EN 61034-2	'1+' including: - initial type-testing and continuous surveillance - audit and testing of samples by 3rd party certification body Factory production control by manufacturer
	B2 _{ca}		Acidity (a1, a2, a3) EN 50267-2-3	
	C _{ca}		Fleming droplets (d0, d1, d2) EN 50399	
	D _{ca}			'3' including: - initial type-testing by 3rd party laboratory Factory production control by manufacturer
Standard cables	E _{ca}	EN 60332-1-2 Flame propagation	-	
No performance determined	F _{ca}	EN 60332-1-2 Flame propagation	-	'4': initial type-testing and factory production control by manufacturer


All dimensions (mm) are nominal

Legrand cabling system LCS³ copper system (continued)

technical information

PoE architecture

Building systems are moving to a single IP Network

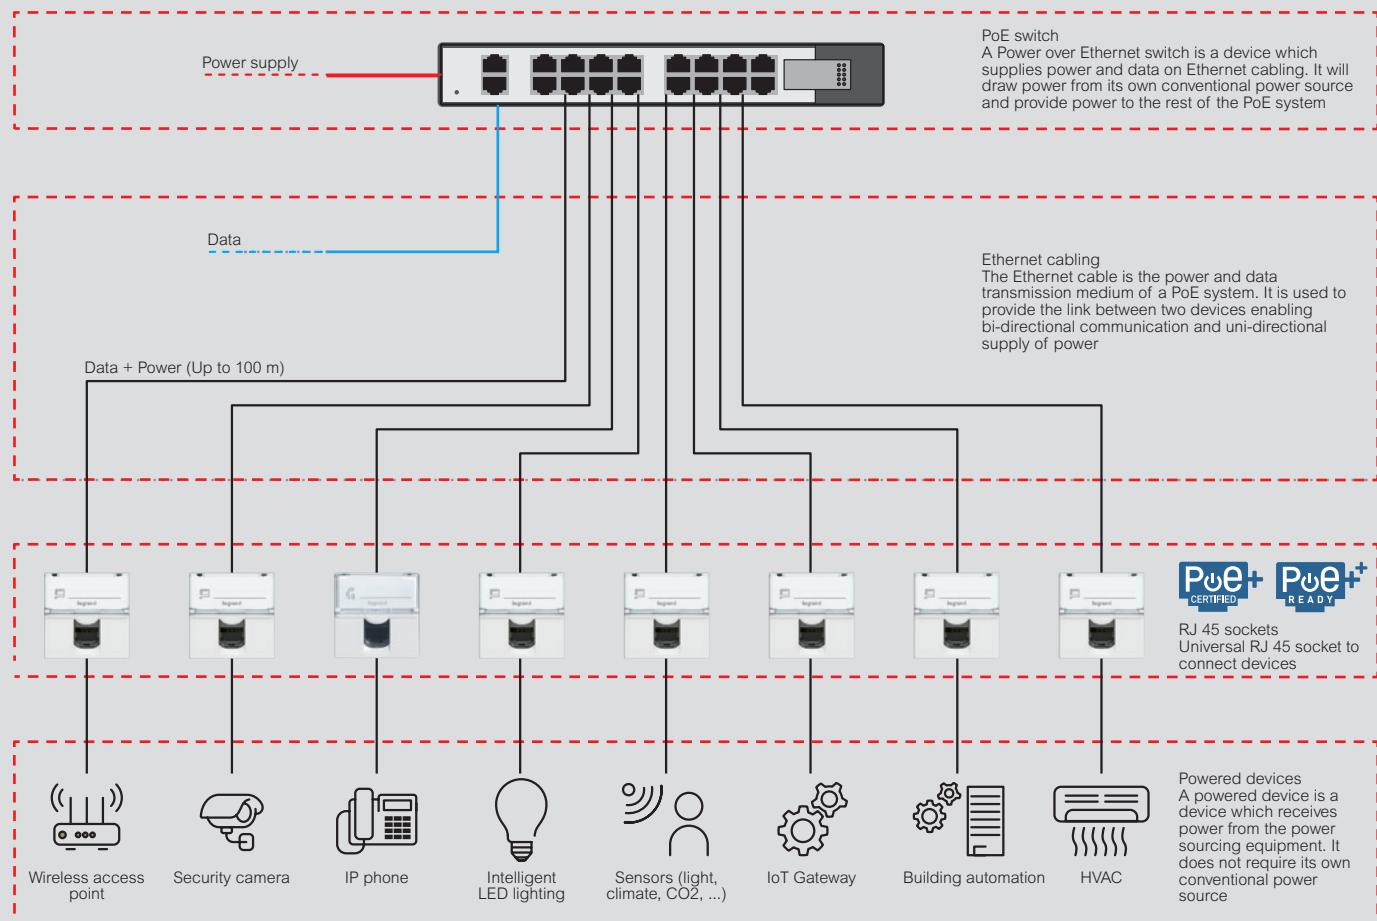

Cabling

Cabling must support enough power throughput and efficiency in addition to the heat dissipation capabilities

Cat. 6A cabling:

To improve thermal performance and energy efficiency while minimising the cost of moves, additions, changes and upgrades

We recommend running Cat. 6A cabling to each powered device, preferably using a zone cabling architecture



Connectivity

Connectivity must be robust, durable and provide power headroom for current carrying capacity

Arcing is inevitable with PoE systems, but Legrand's connectivity locates the last point of contact away from the mated connection, protecting the critical area from spark gap erosion. 50 microinch gold plating of the full mated surfaces and maximum contact area in the full mated position extend the life and performance of the connection

In addition, the connector should have a minimum current carrying capacity of paired traces for structured cabling of 1 amp

Legrand's connectivity provides up to an additional amp of headroom for superior performance



Reliability testing

If connectors are unplugged under load, an inductive current is created within the connector that may spark at one or more contact surfaces, causing the surfaces to corrode

It is recommended that connecting hardware be qualified to support PoE and four-pair PoE applications by using the test schedules in IEC 60512-99-001 (PoE and PoE+) and IEC 60512-99-002 (PoE++)




Fibre optic panels

Completely redesigned fibre optic panels and drawers in high and very high density versions from 96 to 144 connectors per unit.


MODULAR PANELS TO BE EQUIPPED


- Possible to change modular blocks, blank panel, footnote adaptor
- Splice trays to be added if necessary - up to 4 containing 96 LC fibres

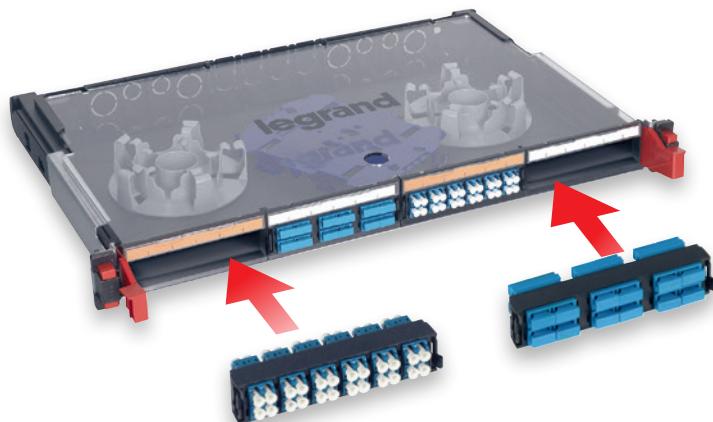

HD MODULAR PANELS TO BE EQUIPPED


- Innovative new quick-fixing solution
- Possible to add splicing cassette with perfectly adapted coiling space
- Mix of fibre/copper on modular panel in drawer

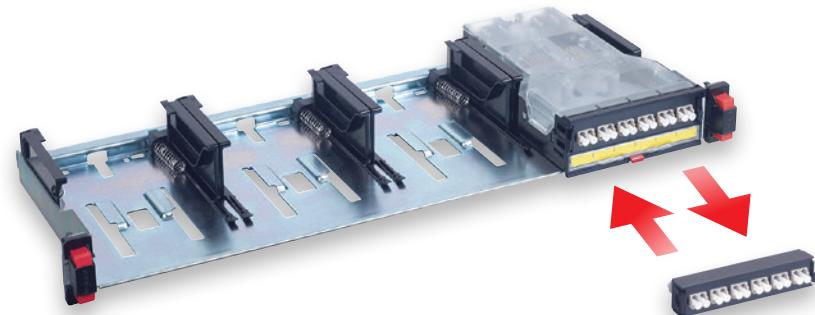

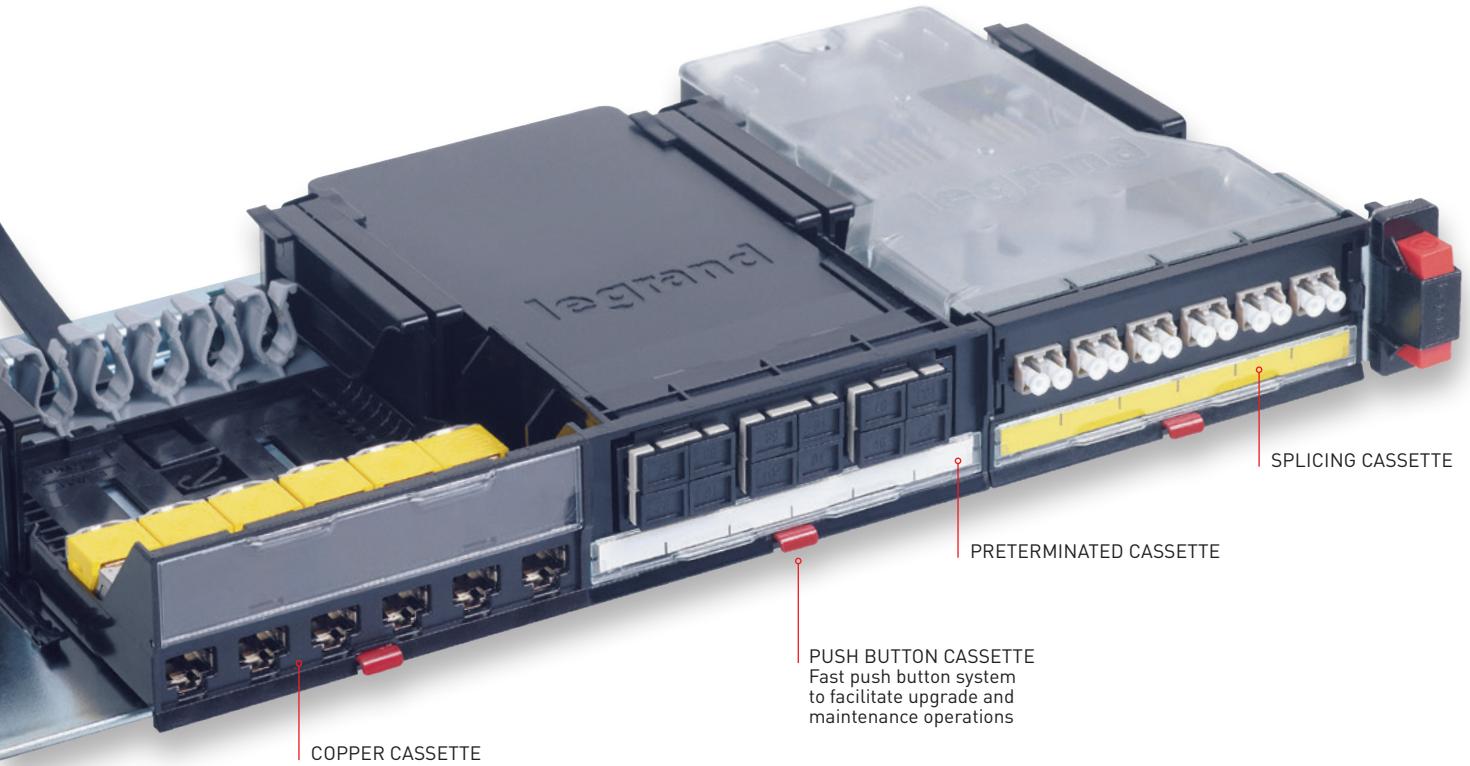

EQUIPPED MODULAR PANELS

- Innovative new quick-fixing solution
- Modular blocks to adapt to modular panel or drawer: LC, SC, ST, LC, APC, SC APC
- Possible to add modular blocks, blank panel, footnote adaptor

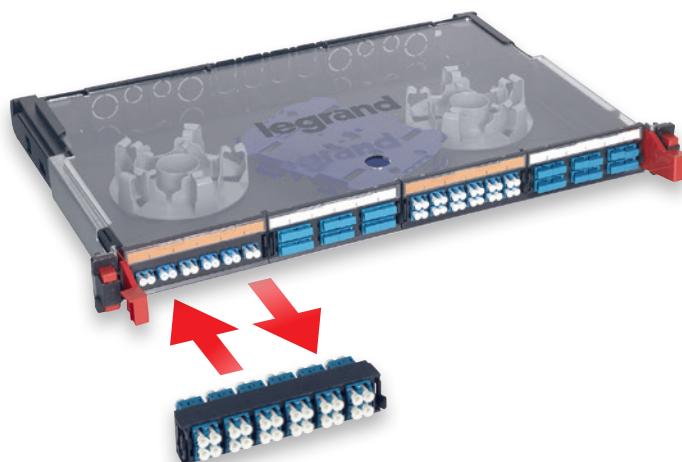

EQUIPPED HD MODULAR PANELS

- Cassettes slide in from front and rear
- Push button on cassette
- Splicing cassette that accepts all modular blocks
- Mixture of fibre/copper on cassette panel
- Trunk and cord management system



connectivity selection tables - fibre optic solutions

configure your system

LCS³ FIBRE OPTIC DRAWERS

			Single-mode (9/125 µm)	Multimode (62.5 and 50/125 µm)
	19" sliding equipped fibre optic drawers	12 SC duplex (24 fibres)	0321 64 (see p. 41)	0321 61 (see p. 41)
		24 LC duplex (48 fibres)	0321 65 (see p. 41)	0321 62 (see p. 41)
		24 ST connectors (48 fibres)	-	0321 63 (see p. 41)
		12 SC APC duplex (24 fibres)	0321 66 (see p. 41)	-
		24 LC APC duplex (48 fibres)	0321 67 (see p. 41)	-
	19" rotating equipped fibre optic drawers	18 SC duplex (36 fibres)	0321 74 (see p. 41)	0321 72 (see p. 41)
		36 LC duplex (72 fibres)	0321 73 (see p. 41)	0321 71 (see p. 41)
	19" modular sliding equipped fibre optic drawers	12 SC duplex (24 fibres)	0 321 06 (see p. 41)	0321 02 (see p. 41)
		24 LC duplex (48 fibres)	-	0321 04 (see p. 41)
	19" modular sliding fibre optic drawer to be equipped with fibre optic blocks	Empty drawer		0321 00 (see p. 41)

LCS³ FIBRE OPTIC DRAWER BLOCKS

			Single-mode (9/125 µm)	Multimode (62.5 and 50/125 µm)
	Fibre optic blocks	SC duplex block for 6 fibre optics	0321 10 (see p. 41)	0321 20 (see p. 41)
		SC duplex high density block for 12 fibre optics	0321 11 (see p. 41)	0321 21 (see p. 41)
		SC APC duplex block for 6 fibre optics	0321 12 (see p. 41)	-
		LC duplex block for 6 fibre optics	0321 13 (see p. 41)	0321 23 (see p. 41)
		LC duplex block for 12 fibre optics	0321 14 (see p. 41)	0321 24 (see p. 41)
		LC high density duplex block for 24 fibre optics	0321 15 (see p. 41)	0321 25 (see p. 41)
		LC APC duplex block for 12 fibre optics	0321 16 (see p. 41)	-
		ST block for 6 fibre optics	0321 17 (see p. 41)	0321 27 (see p. 41)
	Copper block for fibre optic drawer			0321 32 (see p. 41)

(1) MTP is a registered trademark of US Conec Ltd




connectivity selection tables - fibre optic solutions (continued)

configure your system (continued)

LCS³ ACCESSORIES FOR FIBRE OPTIC DRAWER TO BE EQUIPPED

	Accessory for receipt of a fan-out	0321 28 (see p. 41)
	Blank block	0321 29 (see p. 41)
	24 fibre optic pigtail cassette	0321 30 (see p. 41)
	Coiling kit	0321 31 (see p. 41)

LCS³ MODULAR PANEL AND CASSETTES

  	19" modular panel to be equipped with cassettes	0321 40 (see p. 42)							
	Fibre optic splice cassette	0321 41 (see p. 42)							
	Copper cassette to be equipped	0337 55 (see p. 42)							
	High density copper cassette to be equipped	0337 95 (see p. 42)							
	Preterminated MTP⁽¹⁾ cassettes (MPO compatible) Front and rear extraction	<table border="1"> <tr> <td>Multimode OM4 cassette (50/125 µm) 24 LC OM4 Type A/C</td> <td>0321 42 (see p. 42)</td> </tr> <tr> <td>Multimode OM4 cassette (50/125 µm) 12 SC OM4 Type A/C</td> <td>0321 43 (see p. 42)</td> </tr> <tr> <td>Single-mode OS2 cassette (9/125 µm) type OS2 24 LC OS2 Type A/C</td> <td>0321 44 (see p. 42)</td> </tr> <tr> <td>Single-mode OS2 cassette (9/125 µm) 12 SC OS2 Type A/C</td> <td>0321 45 (see p. 42)</td> </tr> </table>	Multimode OM4 cassette (50/125 µm) 24 LC OM4 Type A/C	0321 42 (see p. 42)	Multimode OM4 cassette (50/125 µm) 12 SC OM4 Type A/C	0321 43 (see p. 42)	Single-mode OS2 cassette (9/125 µm) type OS2 24 LC OS2 Type A/C	0321 44 (see p. 42)	Single-mode OS2 cassette (9/125 µm) 12 SC OS2 Type A/C
Multimode OM4 cassette (50/125 µm) 24 LC OM4 Type A/C	0321 42 (see p. 42)								
Multimode OM4 cassette (50/125 µm) 12 SC OM4 Type A/C	0321 43 (see p. 42)								
Single-mode OS2 cassette (9/125 µm) type OS2 24 LC OS2 Type A/C	0321 44 (see p. 42)								
Single-mode OS2 cassette (9/125 µm) 12 SC OS2 Type A/C	0321 45 (see p. 42)								
Blanking cassette	0337 57 (see p. 42)								
Rear cable management accessory	0321 46 (see p. 42)								
Cord management kit	0321 47 (see p. 42)								
Single-mode 4 MTP⁽¹⁾ adapter	0321 33 (see p. 42)								
Multimode 4 MTP⁽¹⁾ adapter	0321 34 (see p. 42)								

(1) MTP is a registered trademark of US Conec Ltd

connectivity selection tables - fibre optic solutions (continued)

configure your system

LCS³ QUICK-CONNECT CONNECTORS

	Tool case for fibre optic quick-connect connectors	0322 70 (see p. 44)
	OM3 / OM4 multimode Quick-connect connectors	LC PC 50/125 µm , 900/250µm
		SC PC 50/125 µm , 900/250µm
	OS2 single-mode Quick-connect connectors	LC UPC 9/125 µm , 900/250µm
		SC UPC 9/125 µm , 900/250µm
		SC APC 9/125 µm , 900/250µm

LCS³ PIGTAILS

		1 m	2 m
	50/125 µm - OM2 (PC)	SC LSZH connectors	0322 10 (see p. 43)
		LC LSZH connectors	0322 11 (see p. 43)
		ST LSZH connectors	0322 12 (see p. 43)
	50/125 µm - OM3 (PC)	SC LSZH connectors	0322 20 (see p. 43)
		LC LSZH connectors	0322 21 (see p. 43)
		ST LSZH connectors	0322 22 (see p. 43)
	50/125 µm - OM4 (PC)	SC LSZH connectors	0322 30 (see p. 43)
		LC LSZH connectors	0322 31 (see p. 43)
		ST LSZH connectors	0322 32 (see p. 43)
	9/125 µm - OS2 (APC or UPC) - OS1 compatible	SC-APC LSZH connectors	0322 40 (see p. 43)
		SC-UPC LSZH connectors	0322 41 (see p. 43)
		LC-APC LSZH connectors	0322 42 (see p. 43)
		LC-UPC LSZH connectors	0322 43 (see p. 43)
		ST-UPC LSZH connectors	0322 44 (see p. 43)
	Set of 12 LC pigtailed	OS2 (UPC)	0326 24 (see p. 43)
		OM3 (PC)	0326 26 (see p. 43)
		OM4 (PC)	0326 71 (see p. 43)
	Pigtail sleeves		0327 44 (see p. 43)
	Fan-out units	6 fibre optics	0330 48 (see p. 43)
		12 fibre optics	0330 49 (see p. 43)

GLUE-ON CONNECTORS 50/125 and 62.5/125 µm

	ST connector	0331 27 (see p. 43)
	SC connector	0331 47 (see p. 43)
	LC connector	0331 00 (see p. 43)

FIBRE OPTIC CLEANING ACCESSORIES

	Ferrule cleaner MPO/MTP ⁽¹⁾	0322 83 (see p. 44)
	Ferrule cleaner LC (PC/APC)	0322 81 (see p. 44)
	Ferrule cleaner SC (PC/APC)	0322 82 (see p. 44)
	LC replacement cartridge	0322 84 (see p. 44)
	SC replacement cartridge	0322 85 (see p. 44)

(1) MTP is a registered trademark of US Conec Ltd

connectivity selection tables - fibre optic solutions (continued)

configure your system

LCS³ MODULAR FIBRE OPTIC DRAWERS, ULTRA HIGH DENSITY, TO BE EQUIPPED

	Fibre optic drawers with front and rear facing cord management	1U	0321 50 (see p. 43)	
		2U	0321 52 (see p. 43)	
		4U	0321 53 (see p. 43)	
		UHD panel	0321 51 (see p. 43)	
MPO cassette - 12 LC OM4 (50/125 µm) Type A/C multimode			0321 54 (see p. 43)	
MPO cassette- 12 LC OS2 (9/125 µm) Type A/C multimode			0321 55 (see p. 43)	
MTP⁽¹⁾ adapters (MPO compatible)	Multimode	Single-mode	0321 56 (see p. 43)	
			0321 57 (see p. 43)	
12 LC multimode adapter			0321 58 (see p. 43)	

LCS³ HIGH DENSITY CASSETTES FOR ULTRA HIGH DENSITY MODULAR FIBRE OPTIC DRAWERS

	MPO cassette - 12 LC OM4 (50/125 µm) Type A/C	0321 54 (see p. 43)
	MPO cassette- 12 LC OS2 (9/125 µm) Type A/C	0321 55 (see p. 43)

LCS³ EQUIPMENT

	MTP⁽¹⁾ adapters (MPO compatible)	Multimode	0321 56 (see p. 43)
		Single-mode	0321 57 (see p. 43)
	12 LC multimode adapter		0321 58 (see p. 43)

MODULAR PANEL AND CASSETTE

	19" modular panel to be equipped with cassettes	0321 40 (see p. 42)
--	--	---------------------

LCS³ MTP⁽¹⁾ HIGH DENSITY CASSETTES (MPO COMPATIBLE) FOR MODULAR PANELS

	OM4 multimode MTP⁽¹⁾ cassettes (50/125 µm)	24 LC	0321 42 (see p. 42)
		12 LC	0321 43 (see p. 42)
	OS2 single-mode MTP⁽¹⁾ cassettes (9/125 µm)	24 LC	0321 44 (see p. 42)
		12 LC	0321 45 (see p. 42)
	Fibre optic splice cassette		0321 41 (see p. 42)
	Copper cassette to be equipped		0337 55 (see p. 42)
	Blanking cassette		0337 57 (see p. 42)
	Rear cable management accessory		0321 46 (see p. 42)
	Cord management kit		0321 47 (see p. 42)
	MTP⁽¹⁾ adapters (for installation in splice cassettes)	Single-mode 4 MTP⁽¹⁾	0321 33 (see p. 42)
		Multimode 4 MTP⁽¹⁾	0321 34 (see p. 42)

LCS³ FIBRE OPTIC FEEDTHROUGH SOCKETS

	2 x ST fibre optic feedthrough socket. White - Bayonet mount	0786 16 (see p. 47)
	2 x SC fibre optic feedthrough socket. White - 'Push-pull' connection	0786 17 (see p. 47)
	2 x SC/APC fibre optic feedthrough socket. White - 'Push-pull' connection with shutters	0786 14 (see p. 47)

(1) MTP is a registered trademark of US Conec Ltd

connectivity selection tables - fibre optic solutions (continued)

configure your system

LCS ³ FIBRE OPTIC PATCH PANELS			OS1/OS2 (UPC) single-mode 9/125 µm	OM4 multimode 50/125 µm	OM3 multimode 50/125 µm
	SC/SC duplex cords	1 m	0326 00 (see p. 47)	0326 30 (see p. 47)	0326 09 (see p. 47)
		2 m	0326 01 (see p. 47)	0326 31 (see p. 47)	0326 10 (see p. 47)
		3 m	0326 02 (see p. 47)	0326 32 (see p. 47)	0326 11 (see p. 47)
	SC/LC duplex cords	1 m	0326 03 (see p. 47)	-	0326 12 (see p. 47)
		2 m	0326 04 (see p. 47)	-	0326 13 (see p. 47)
		3 m	0326 05 (see p. 47)	-	0326 14 (see p. 47)
	LC/LC duplex cords	0.5 m	0326 28 (see p. 47)	0326 33 (see p. 47)	-
		1 m	0326 06 (see p. 47)	0326 34 (see p. 47)	0326 15 (see p. 47)
		2 m	0326 07 (see p. 47)	0326 35 (see p. 47)	0326 16 (see p. 47)
		3 m	0326 08 (see p. 47)	0326 36 (see p. 47)	0326 17 (see p. 47)
		5 m	0326 29 (see p. 47)	0326 37 (see p. 47)	-
	LC/LC uniboot duplex cords reversible polarity	1 m	0326 86 (see p. 47)	0326 95 (see p. 47)	-
		2 m	0326 87 (see p. 47)	0326 96 (see p. 47)	-
		3 m	0326 88 (see p. 47)	0326 97 (see p. 47)	-
		5 m	0326 89 (see p. 47)	0326 98 (see p. 47)	-
		10 m	0326 92 (see p. 47)	0326 99 (see p. 47)	-

NOTE: for OM2 multimode fibre optic cables see p. 46

LCS ³ HIGH DENSITY PRETERMINATED FIBRE OPTIC LINKS			OS2 Fan-out - Fan-out	OM3 Fan-out - Fan-out	OS2 MTP ⁽¹⁾	OM3 MTP ⁽¹⁾
	Micro cables - OS2 and OM3 Fan-out - Fan-out	6 LC duplex - 6 LC duplex	10 m	0324 21 (see p. 45)	0324 01 (see p. 45)	-
			20 m	0324 22 (see p. 45)	0324 02 (see p. 45)	-
			30 m	0324 23 (see p. 45)	0324 03 (see p. 45)	--
			40 m	0324 24 (see p. 45)	0324 04 (see p. 45)	-
			50 m	0324 25 (see p. 45)	0324 05 (see p. 45)	-
	Micro cables - OS2 and OM3 MTP ⁽¹⁾	12 LC duplex - 12 LC duplex	10 m	0324 31 (see p. 45)	0324 11 (see p. 45)	-
			20 m	0324 32 (see p. 45)	0324 12 (see p. 45)	-
			30 m	0324 33 (see p. 45)	0324 13 (see p. 45)	-
			40 m	0324 34 (see p. 45)	0324 14 (see p. 45)	-
			50 m	0324 35 (see p. 45)	0324 15 (see p. 45)	-
	Micro cables - OS2 and OM3 MTP ⁽¹⁾	12 fibre optics - MTP ⁽¹⁾ - MTP ⁽¹⁾	10 m	-	-	0324 51 (see p. 45)
			20 m	-	-	0324 52 (see p. 45)
			30 m	-	-	0324 53 (see p. 45)
			40 m	-	-	0324 54 (see p. 45)
			50 m	-	-	0324 55 (see p. 45)


(1) MTP is a registered trademark of US Conec Ltd

LCS ³ FIBRE OPTIC CABLES (REELS)				OS1/OS 2 (UPC) single-mode 9/125 µm	OM4 multimode 50/125 µm	OM3 multimode 50/125 µm
	Indoor/outdoor	4 fibre	Loose tube	0325 02 (see p. 46)	0325 43 (see p. 45)	0325 37 (see p. 46)
			Loose tube	0325 03 (see p. 46)	0325 44 (see p. 45)	0325 38 (see p. 46)
			Loose tube	0325 12 (see p. 46)	-	-
			Tight structure 900 µm	-	0326 65/66 (see p. 45)	0325 10 (see p. 46)
			Loose tube	0325 14 (see p. 46)	0325 45 (see p. 45)	0325 39 (see p. 46)
		6 fibre	Tight structure 900 µm	0325 50 (see p. 46)	0326 67 (see p. 45)	0325 11 (see p. 46)
			Loose tube	0325 51 (see p. 46)	-	0325 53 (see p. 46)
		12 fibre	Tight structure 900 µm	-	0326 68 (see p. 45)	0325 52 (see p. 46)
			Loose tube	-	-	-

NOTE: for OM2 multimode fibre optic cables see p. 46

Legrand cabling system LCS³ fibre optic

19" optic drawers

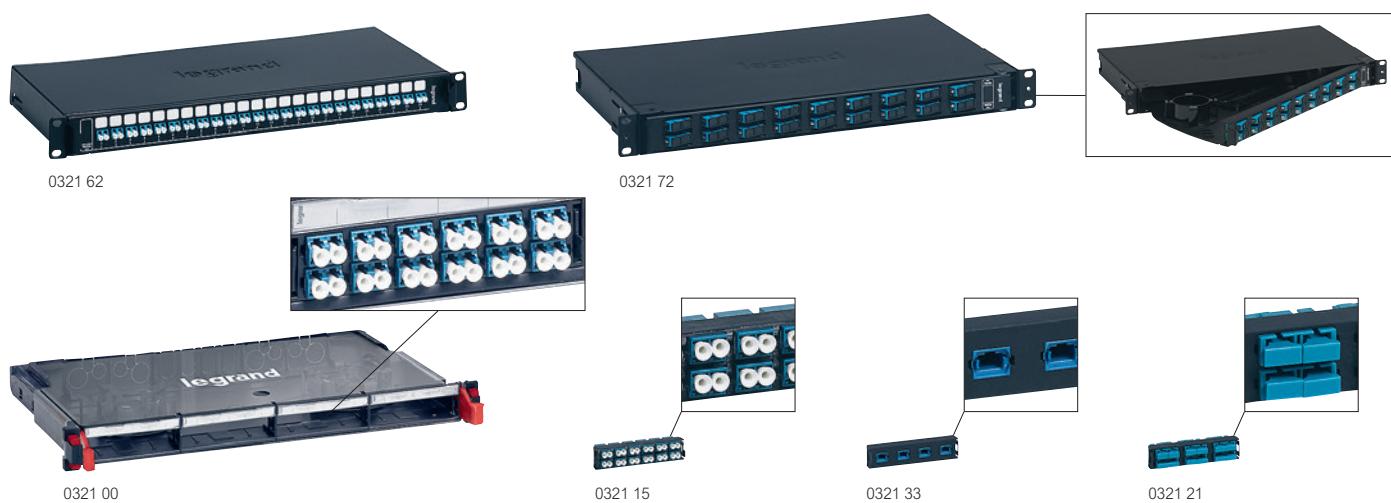

Selection chart p. 36-37

Technical information p. 48-49

Pack	Cat. Nos.	Equipped 19" fibre optic drawers
		<p>Metal equipped 19" optic drawers with 4 cable inputs, supplied with fastening kit, 1 PE Ø 13.5 mm, coiling system and pigtail duct Panel and optic port marking on dedicated marking areas</p> <p>Sliding End of travel stop with 30° tilting Maximum capacity either: - 24 ST and SC connectors - 48 LC connectors Depth 220 mm, height 1U</p>
1	0321 61	12 SC duplex multimode connectors for 24 fibres
1	0321 62	24 LC duplex multimode connectors for 48 fibres
1	0321 63	24 ST multimode connectors for 48 fibres
1	0321 64	12 SC duplex single-mode connectors for 24 fibres
1	0321 65	24 LC duplex single-mode connectors for 48 fibres
1	0321 66	12 SC APC duplex single-mode connectors for 24 fibres
1	0321 67	24 LC APC duplex single-mode connectors for 48 fibres
		<p>Rotating Delivered with reversible left or right opening Maximum capacity, either: - 72 LC connectors - 36 SC connectors Depth 260 mm, height 1U</p>
1	0321 71	36 LC duplex multimode connectors for 72 fibres
1	0321 72	18 SC duplex multimode connectors for 36 fibres
1	0321 73	36 LC duplex single-mode connectors for 72 fibres
1	0321 74	18 SC duplex single-mode connectors for 36 fibres

Pack	Cat. Nos.	19" modular fibre optic drawers
		<p>Metal modular 19" optic drawers with 8 cable inputs, supplied with fastening kit, 2 PE Ø 13.5 mm, coiling system and splice cassette</p> <p>Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures</p> <p>Supplied with numbered labels</p> <p>End of travel stop with 30° tilting</p> <p>Maximum capacity either: - 48 SC connectors - 24 ST connectors - 96 LC connectors Depth 215 mm, height 1U</p> <p>Sliding, equipped 12 SC duplex multimode connectors for 24 fibres 24 LC duplex multimode connectors for 48 fibres 12 SC duplex single-mode connectors for 24 fibres</p> <p>Sliding, to be equipped with fibre optic blocks Can accept all fibre optic blocks - 4 blocks maximum Empty drawer</p>
1	0321 02	12 SC duplex multimode connectors for 24 fibres
1	0321 04	24 LC duplex multimode connectors for 48 fibres
1	0321 06	12 SC duplex single-mode connectors for 24 fibres
1	0321 00	Sliding, to be equipped with fibre optic blocks Can accept all fibre optic blocks - 4 blocks maximum Empty drawer

Pack	Cat. Nos.	Fibre optic drawer blocks
		Clipped directly to the optic drawer to be equipped, Cat. No. 0321 00 (opposite), or the fibre optic splice cassette, Cat. No. 0321 41 see p. 42
		Single-mode fibre optic blocks (9/125 µm)
1	0321 17	ST block for 6 single-mode fibre optics
1	0321 10	SC duplex block for 6 single-mode fibre optics
1	0321 11	SC duplex high density block for 12 single-mode fibre optics
1	0321 12	SC APC duplex block for 6 single-mode fibre optics
1	0321 13	LC duplex block for 6 single-mode fibre optics
1	0321 14	LC duplex block for 12 single-mode fibre optics
1	0321 15	LC duplex high density block for 24 single-mode fibre optics
1	0321 16	LC APC duplex block for 12 single-mode fibre optics
1	0321 33	Single-mode 4 MTP ⁽¹⁾ feedthrough adapter
		Multimode fibre optic blocks (62.5 and 50/125 µm)
1	0321 27	ST block for 6 multimode fibre optics
1	0321 20	SC duplex block for 6 multimode fibre optics
1	0321 21	SC duplex high density block for 12 multimode fibre optics
1	0321 23	LC duplex block for 6 multimode fibre optics
1	0321 24	LC duplex block for 12 multimode fibre optics
1	0321 25	LC duplex high density block for 24 multimode fibre optics
1	0321 34	Multimode 4 MTP ⁽¹⁾ feedthrough adapter

Pack	Cat. Nos.	Copper block for fibre optic drawer
1	0321 32	Clips directly to the optic drawer to be equipped, Cat. No. 0321 00 (opposite) Gives the possibility of mixing fibre optic and copper

Pack	Cat. Nos.	Accessories for fibre optic drawer to be equipped
1	0321 28	Accessory for receipt of a fan-out Clips onto back of drawer Enables the entry of preterminated products
1	0321 29	Blank Blank block
1	0321 30	Pigtail cassette Capacity 24 fibre optics
1	0321 31	Coiling kit 1 accessory

(1) MTP is a registered trademark of US Conec Ltd

Legrand cabling system LCS³ fibre optic

19" fibre optic modular panel and drawer cassettes



0321 40 + 0321 41



Panel 0321 40 to be equipped with 4 cassettes 0321 43



0321 41



0321 43



0321 46



Selection chart **p. 37, 39**
Technical information **p. 48-49**

Pack	Cat. Nos.	Modular 19" panel to be equipped with cassettes	Pack	Cat. Nos.	Accessories for 19" panel to be equipped with cassettes
1	0321 40	Modular 19" panel to be equipped with cassettes To be equipped with maximum 4 automatic extraction cassette Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Maximum capacity, either: - 48 SC connectors - 24 ST connectors - 96 LC connectors Depth 190 mm, height 1U	1	0321 46	Rear cable management accessory For installation on panel Cat. No. 0321 40
	0321 41	Optic drawer cassettes Installed directly in the optic panel Cat. No. 0321 40 Removable cassette Extraction using push button, making installation and maintenance easier	1	0321 47	Cord management kit (guide/support/door) For installation on panel Cat. No. 0321 40; 2 side cord management and front door with integrated marking to ensure correct front and side cord management Cord support to be installed on the cassette to make side passages easier
1	0321 41	Fibre optic splice cassette Accepts all modular fibre optic blocks			
1	0337 55	Copper cassette to be equipped Accepts 6 Cat. 5e, Cat. 6, Cat. 6A and Cat. 8 connectors			
1	0337 95	High density copper cassette to be equipped Accepts 12 Cat. 5e, Cat. 6 and Cat. 6A connectors			
		MTP⁽¹⁾ preterminated cassette (MPO compatible) Front and rear extraction High performance cassette, low insertion loss <0.35 dB			
1	0321 42	Multimode OM4 cassette (50/125 µm) 24 LC			
1	0321 43	OM4 Type A/C Multimode OM4 cassette (50/125 µm) 12 SC			
1	0321 44	OM4 Type A/C Single-mode OS2 cassette (9/125 µm) type OS2 24 LC			
1	0321 45	OS2 Type A/C Single-mode OS2 cassette (9/125 µm) 12 SC			
1	0337 57	Blanking cassette Used to blank the panel			
1	0321 33	Adapters Single-mode 4 MTP ⁽¹⁾ adapter (installation in cassette Cat. No. 0321 41)			
1	0321 34	Multimode 4 MTP ⁽¹⁾ adapter (installation in cassette Cat. No. 0321 41)			

(1) MTP is a registered trademark of US Conec Ltd

Legrand cabling system LCS³ fibre optic

19" high density and ultra high density fibre optic drawers




0321 50



0321 55



0321 40



0321 56



Selection chart p. 38-39
Technical information p. 48-49

Pack	Cat. Nos.	Modular fibre optic drawers, ultra high density to be equipped with cassettes
		Fixed and modular chassis for the reception of the drawers
		Fibre optic drawers with front and rear facing cord management
		Maximum capacity 4U (up to 48 cassettes) - 576 LC connectors
		Maximum capacity 2U (up to 24 cassettes) - 288 LC connectors
		Maximum capacity 1U (up to 12 cassettes) - 144 LC connectors
1	0321 50	1U
1	0321 52	2U
1	0321 53	4U
1	0321 51	UHD panel to be equipped with cassette Without rear cord management 1U
		Ultra high density cassettes
		Clipped directly to the fibre optic drawers, Cat. Nos. 0321 50/51/52/53
		Sliding cassette for the above chassis
		Front or rear cassette extraction
		MTP ⁽¹⁾ high performance cassette
		Low insertion loss < 0.35 dB
		A/C polarity
		Multimode OM4 cassette (50/125 µm)
1	0321 54	For OM4 type 50/125 µm multimode installations MPO cassette 12 LC OM4 Type A/C
		OS2 cassette (9/125 µm)
1	0321 55	For OS2 type 9/125 µm multimode installations MPO cassette 12 LC OS2 Type A/C
		MTP⁽¹⁾ adapters (MPO compatible)
1	0321 56	Clipped directly to the fibre optic drawers, Cat. Nos. 0321 50/51/52/53
1	0321 57	Multimode 4 MTP ⁽¹⁾ adapter Single-mode 4 MTP ⁽¹⁾ adapter
		LC adapter
1	0321 58	Clipped directly to the fibre optic drawers, Cat. Nos. 0321 50/51/52/53 Adapter 12 LC multimode

(1) MTP is a registered trademark of US Conec Ltd

Legrand cabling system LCS³ fibre optic

pigtails, glue-on connectors and fan-out units



0322 20



0322 31



Selection chart p. 38
Technical information p. 48-49

Pack	Cat. Nos.	Pigtails
		Can be used for on-site connection of the fibre optic cable: - OM2/OM3/OM4 IL Typical/Master = 0.15 dB - OS2 IL Typical/Master = 0.18 dB
		50/125 µm - OM2 (PC) connectors
10	0322 10	SC 1 m LSZH
10	0322 11	LC 1 m LSZH
10	0322 12	ST 1 m LSZH
10	0322 13	SC 2 m LSZH
10	0322 14	LC 2 m LSZH
10	0322 15	ST 2 m LSZH
		50/125 µm - OM3 (PC) connectors
10	0322 20	SC 1 m LSZH
10	0322 21	LC 1 m LSZH
10	0322 22	ST 1 m LSZH
10	0322 23	SC 2 m LSZH
10	0322 24	LC 2 m LSZH
		50/125 µm - OM4 (PC) connectors
10	0322 30	SC 1 m LSZH
10	0322 31	LC 1 m LSZH
10	0322 32	ST 1 m LSZH
10	0322 33	SC 2 m LSZH
10	0322 34	LC 2 m LSZH
		9/125 µm - OS2 (APC or UPC) - OS1 compatible connectors
10	0322 40	SC-APC OS2 1 m LSZH
10	0322 41	SC-UPC OS2 1 m LSZH
10	0322 42	LC-APC OS2 1 m LSZH
10	0322 43	LC-UPC OS2 1 m LSZH
10	0322 44	ST-UPC OS2 1 m LSZH
10	0322 45	SC-APC OS2 2 m LSZH
10	0322 46	SC-UPC OS2 2 m LSZH
10	0322 47	LC-UPC OS2 2 m LSZH
10	0322 48	LC-APC OS2 2 m LSZH
10	0322 49	ST-UPC OS2 2 m LSZH
		Set of 12 LC pigtails
1	0326 24	OS2 12 pigtails LC-UPC
1	0326 26	OM3 12 pigtails LC-PC
1	0326 71	OM4 12 pigtails LC-PC
		Pigtail sleeves
1	0327 44	40 mm - bag of 50 sheaths
		Glue-on connectors 50/125 and 62.5/125 µm
		Supplied with 900 µm sleeve Ceramic ferrule connector Typical attenuation: 0.3 dB Connectors
10	0331 27	ST
10	0331 47	SC
10	0331 00	LC
		Fan-out units
1	0330 48	Allows a 900 µm fibre optic gain 250 µm diameter fibre optics accepted 6 fibre optic
1	0330 49	12 fibre optic

Legrand cabling system LCS³ fibre optic

case and quick-connect connectors



Selection chart **p. 38**
Technical information **p. 48-49**

Pack	Cat. Nos.	Tool case for the preparation of the fibre optic for quick-connect connectors
1	0322 70	Contains the tools required for the preparation of the fibre optic cable, for the completion of a first test to confirm the correct connection of the fibre optic to the connector, and the accessories for easy connection in all situations Consisting of: - Precision cleaver - Kevlar stripping and cutting tool - Visual defect detector - Installation details and video - Accessories (cleaners, marker etc.)

		Quick-connect connectors
1	0322 71	Preparation completed using the case, Cat. No. 0322 70
1	0322 72	Easy to connect, reliable and reusable up to 5 times Enable the locking of the fibre optic inside the connector A LED is used to test the connection No glue or polishing required Can be installed on 900 µm fibre optics For 250 µm fibre optic use dedicated tubes, delivered with the connector; typical IL multimode OM3/OM4 = 0.1 db, single mode OS2 = 0.2 db (PC) and 0.3 db (APC)
		OM3/OM4 multimode connectors
1	0322 73	Set of 12 connectors LC PC 50/125 µm, 900/250 µm
1	0322 74	SC PC 50/125 µm, 900/250 µm
1	0322 75	OS2 single-mode connectors
1	0322 76	Set of 12 connectors LC UPC 9/125 µm, 900/250 µm
1	0322 77	SC UPC 9/125 µm, 900/250 µm
1	0322 78	SC APC 9/125 µm, 900/250 µm

Pack	Cat. Nos.	Fibre optic cleaning accessories
1	0322 83	Ferrule cleaner MPO/MTP ⁽¹⁾
1	0322 81	Ferrule cleaner LC (PC/APC)
1	0322 82	Ferrule cleaner SC (PC/APC)
1	0322 84	LC replacement cartridge
1	0322 85	SC replacement cartridge

(1) MTP is a registered trademark of US Conec Ltd

Legrand cabling system LCS³ fibre optic preterminated solution



0324 41



Selection chart p. 40

Technical information p. 48-49

Pack	Cat. Nos.	High density preterminated fibre optic links	
		Delivered on cardboard drums	
		Connection of high density drawer cassette	
		Low density micro-cable	
		Sheaths in LSZH, colour aqua (OM3) and yellow (OS2)	
		Supplied with test reports and unwinder	
		Fan-out - Fan-out: spark gap in anodised aluminium for optimum resistance	
		Low connector insertion loss LC < 0.15 dB/connector	
		MTP ⁽¹⁾ -MTP ⁽¹⁾ : low connector insertion loss MTP ⁽¹⁾ < 0.35 dB/connector	
		Micro cables OM3 Fan-out - Fan-out	
		Micro cables with spark gap, output 2 mm	
		Designation	Length (m)
1	0324 01	6 LC duplex - 6 LC duplex	10
1	0324 02	6 LC duplex - 6 LC duplex	20
1	0324 03	6 LC duplex - 6 LC duplex	30
1	0324 04	6 LC duplex - 6 LC duplex	40
1	0324 05	6 LC duplex - 6 LC duplex	50
1	0324 11	12 LC duplex - 12 LC duplex	10
1	0324 12	12 LC duplex - 12 LC duplex	20
1	0324 13	12 LC duplex - 12 LC duplex	30
1	0324 14	12 LC duplex - 12 LC duplex	40
1	0324 15	12 LC duplex - 12 LC duplex	50
		Micro cables OS2 Fan-out - Fan-out	
		Micro cables with spark gap, output 2 mm	
		Designation	Length (m)
1	0324 21	6 LC duplex - 6 LC duplex	10
1	0324 22	6 LC duplex - 6 LC duplex	20
1	0324 23	6 LC duplex - 6 LC duplex	30
1	0324 24	6 LC duplex - 6 LC duplex	40
1	0324 25	6 LC duplex - 6 LC duplex	50
1	0324 31	12 LC duplex - 12 LC duplex	10
1	0324 32	12 LC duplex - 12 LC duplex	20
1	0324 33	12 LC duplex - 12 LC duplex	30
1	0324 34	12 LC duplex - 12 LC duplex	40
1	0324 35	12 LC duplex - 12 LC duplex	50
		Micro cables OM3 MTP⁽¹⁾	
		Designation	Length (m)
1	0324 41	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	10
1	0324 42	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	20
1	0324 43	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	30
1	0324 44	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	40
1	0324 45	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	50
		Micro cables OS2 MTP⁽¹⁾	
		Designation	Length (m)
1	0324 51	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	10
1	0324 52	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	20
1	0324 53	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	30
1	0324 54	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	40
1	0324 55	12 fibre optics - MTP ⁽¹⁾ -MTP ⁽¹⁾	50

(1) MTP is a registered trademark of US Conec Ltd



Other configurations on request

Contact us on +44 (0) 370 608 9020

Legrand cabling system LCS³ fibre optic cables



0326 66

Selection chart p. 40
Technical information p. 48-49

LSOH sheath (except Cat. Nos. 0325 46/47)
Euroclass D_{ca} (except Cat. Nos. 0325 46/47/48)
Colour code FOTAG
Conform to EN 50173-2, ISO IEC 11801 standard
Packing on reel
Tight structure: 'easy strip'

Pack	Cat. Nos.	Loose tube	Tight structure 900 µm	OM4 multimode fibre optic cables (50/125 µm)
2000 ⁽¹⁾	0325 43	—	—	For multimode installations 50/125 µm, type OM 4
2000 ⁽¹⁾	0325 44	—	—	Aqua sheaths
2000 ⁽¹⁾	0325 45	—	—	Suitable for 10 Giga Ethernet networks
500 ⁽¹⁾	—	0326 65	—	Indoor/outdoor (glass strands)
1000 ⁽¹⁾	—	0326 66	—	4 fibres - 2000 m
1000 ⁽¹⁾	—	0326 67	—	Indoor/outdoor (glass strands)
1000 ⁽¹⁾	—	0326 68	—	8 fibres - 2000 m
				Indoor/outdoor (glass strands)
				12 fibres - 2000 m
				Indoor/outdoor (glass strands)
				6 fibres - 500 m
				Indoor/outdoor (glass strands)
				6 fibres - 1000 m
				Indoor/outdoor (glass strands)
				12 fibres - 1000 m
				Indoor/outdoor (glass strands)
				24 fibres - 1000 m

(1) in metre(s)

Legrand cabling system LCS³ fibre optic

cables (continued)



0325 08



0325 10



Selection chart **p. 40**

Technical information **p. 48-49**

LSZH sheath
Euroclass D_{ca}
Colour code: FOTAG
Conform to EN 50173-2, ISO IEC 11801 standard
Packing on drum (2000 m)
Tight structure: 'easy strip'

Pack	Cat. Nos.	
	Loose tube	Tight structure 900 µm
2000 ⁽¹⁾	0325 02	–
2000 ⁽¹⁾	0325 03	–
2000 ⁽¹⁾	0325 12	–
2000 ⁽¹⁾	0325 14	0325 50
2000 ⁽¹⁾	0325 51	–

OS2 (UPC) single-mode fibre optic cables (9/125 µm) - (OS1 compatible)

For single-mode installations 9/125 µm, type OS2
Yellow or black sheaths for outdoor, rodent guard
Indoor/outdoor (glass strands)
4 fibres

Indoor/outdoor (glass strands)
8 fibres

Indoor/outdoor (glass strands)
6 fibres

Indoor/outdoor (glass strands)
12 fibres

Indoor/outdoor (glass strands)
24 fibres

Pack	Cat. Nos.	
2000 ⁽¹⁾	Loose tube	Tight structure 900 µm
2000 ⁽¹⁾	–	0325 10
2000 ⁽¹⁾	–	0325 11
2000 ⁽¹⁾	0325 53	0325 52
2000 ⁽¹⁾	0325 37	–
2000 ⁽¹⁾	0325 38	–
2000 ⁽¹⁾	0325 39	–

OM3 multimode fibre optic cables (50/125 µm)

For multimode installations 50/125 µm, type OM3
Aqua sheaths
Suitable for 10 Giga Ethernet networks
Indoor/outdoor (glass strands)
6 fibres

Indoor/outdoor (glass strands)
12 fibres

Indoor/outdoor (glass strands)
24 fibres

Indoor/outdoor (glass strands)
4 fibres

Indoor/outdoor (glass strands)
8 fibres

Indoor/outdoor (glass strands)
12 fibres

Pack	Cat. Nos.	
2000 ⁽¹⁾	Loose tube	900 µm
2000 ⁽¹⁾	–	Tight buffer
2000 ⁽¹⁾	0325 04	0325 08
2000 ⁽¹⁾	0325 06	0325 09

OM2 multimode fibre optic cables (50/125 µm)

For 50/125 µm multimode installations type OM2
Orange jacket or black for outdoor, corrugated
Indoor/outdoor (universal)
4 fibres

Indoor/outdoor (universal)
6 fibres

Indoor/outdoor (universal)
12 fibres

(1) in metre(s)

Legrand cabling system LCS³ fibre optic

patch cords



Selection chart p. 39-40
Technical information p. 48-49

Fitted with ceramic ferrule connectors on each end
Individually packed and tested (report supplied)
Zipcord LSZH sheath

Pack	Cat. Nos.	OS1/OS2 (UPC) single-mode optical cords
		Maximum optic loss / Master: 0.25 dB For single-mode installations 9/125 µm, type OS1/OS2 Yellow sheaths
3	0326 00	SC/SC duplex cords Length: 1 m
3	0326 01	Length: 2 m
3	0326 02	Length: 3 m
3	0326 03	SC/LC duplex cords Length: 1 m
3	0326 04	Length: 2 m
3	0326 05	Length: 3 m
		LC/LC duplex cords
3	0326 28	Length: 0.5 m
3	0326 06	Length: 1 m
3	0326 07	Length: 2 m
3	0326 08	Length: 3 m
3	0326 29	Length: 5 m
		LC/LC uniboot duplex cords
3	0326 86	Reversible polarity Length: 1 m
3	0326 87	Length: 2 m
3	0326 88	Length: 3 m
3	0326 89	Length: 5 m
3	0326 92	Length: 10 m

Pack	Cat. Nos.	OM4 multimode fibre optic cords (50/125 µm)
		Suitable for 10 Giga Ethernet networks Optic losses max/Master: 0.15 dB for multimode installations 50/125 µm, type OM4 Aqua sheaths
3	0326 30	SC/SC duplex cords Length: 1 m
3	0326 31	Length: 2 m
3	0326 32	Length: 3 m
3	0326 33	LC/LC duplex cords Length: 0.5 m
3	0326 34	Length: 1 m
3	0326 35	Length: 2 m
3	0326 36	Length: 3 m
3	0326 37	Length: 5 m
		LC/LC uniboot duplex cords
3	0326 95	Reversible polarity Length: 1 m
3	0326 96	Length: 2 m
3	0326 97	Length: 3 m
3	0326 98	Length: 5 m
3	0326 99	Length: 10 m

Pack	Cat. Nos.	OM3 multimode fibre optic cords (50/125 µm)
		Suitable for 10 Giga Ethernet networks Maximum optic loss / Master: 0.25 dB For multimode installations 50/125 µm, type OM3 Aqua sheaths
		SC/SC duplex cords Length: 1 m
3	0326 09	Length: 2 m
3	0326 10	Length: 3 m
3	0326 11	
		SC/LC duplex cords Length: 1 m
3	0326 12	Length: 2 m
3	0326 13	Length: 3 m
3	0326 14	
		LC/LC duplex cords Length: 1 m
3	0326 15	Length: 2 m
3	0326 16	Length: 3 m
3	0326 17	

Pack	Cat. Nos.	OM2 multimode fibre optic cords (50/125 µm)
		Optic losses max/Master: 0.25 dB For multimode installations 50/125 µm, type OM2 Orange sheaths
		ST/ST duplex cords Length: 1 m
3	0330 80	Length: 2 m
3	0330 81	Length: 3 m
3	0330 82	
		SC/SC duplex cords Length: 1 m
3	0330 69	Length: 2 m
3	0330 70	Length: 3 m
3	0330 71	
		ST/SC duplex cords Length: 2 m
3	0330 72	Length: 3 m
3	0330 73	
		LC/LC duplex cords Length: 2 m
3	0330 61	
		SC/LC duplex cords Length: 1 m
3	0330 75	Length: 2 m
3	0330 63	Length: 3 m
3	0330 76	
		LC/ST duplex cords Length: 2 m
3	0330 65	

Pack	Cat. Nos.	Fibre optic feedthrough sockets
		Equipped with 2 inputs / 2 outputs duplex feedthrough Enable the connection of two fibre optics (fitted with their connectors) Supplied with protection caps Equipped with a clear nameplate holder 2 modules
1	0786 16	2 x ST fibre optic feedthrough socket Bayonet mount (STII compatible) <input type="radio"/> White
1	0786 17	2 x SC fibre optic feedthrough socket 'Push-pull' connection <input type="radio"/> White
1	0786 14	2 x SC/APC fibre optic feedthrough socket 'Push-pull' connection with shutters <input type="radio"/> White

Legrand cabling system LCS³ fibre optic system

technical information

Technical characteristics


- Connectors connected using 900 µm and 250 µm fibre optics
- Maximum weakening 0.3 dB
- Perfectly suited for high delivery systems: 10 Gigabit Ethernet
- Operating temperature: from 0 to 65°C
- Shallow depth connectors

New optical classes according to ISO/IEC 11801 edition 3 (2017)


Optical connection parameters according to ISO 11801 / EN 50173

Parameter	Multimode		Single-mode	
	850 nm	1 300 nm	1 310 nm	1 550 nm
Fibre attenuation dB/km	3.5 max	1.5 max	1.0	1.0
Bandwidth MHz.km	200 min	500 min	n/a	n/a
Connector attenuation dB	0.75 max	0.75 max	0.75 max	0.75 max
Return loss dB	20 min	20 min	26 min	26 min

Typical diagram of a fibre optic connection between 2 distributors

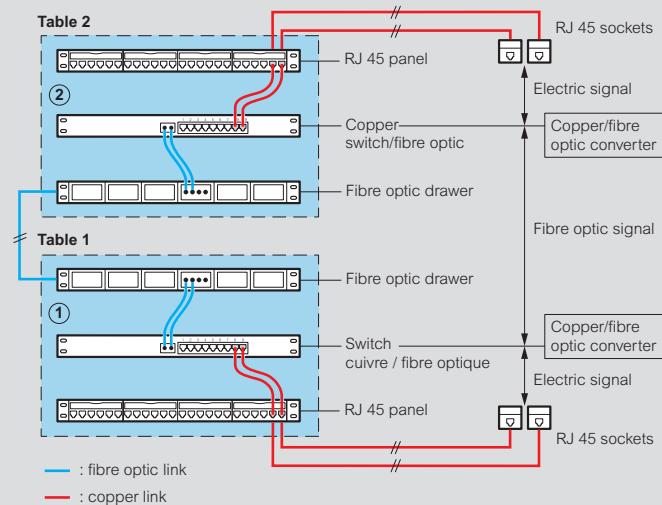

Maximum length of a channel with the use of fibre optic

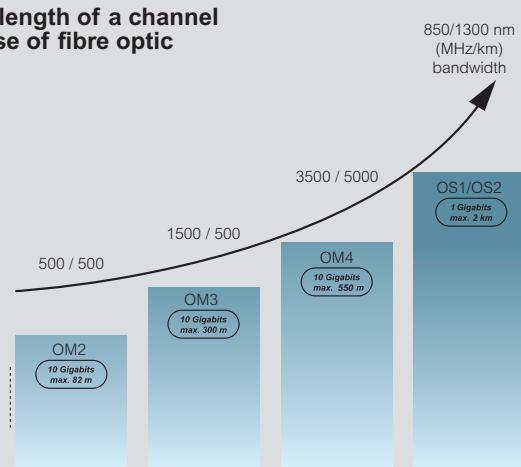

Protocols (max. length)	Multimode			Single-mode
	OM2	OM3	OM4	OS1/OS2
10 Gigabit Ethernet (base S/R)	82 m	300 m	550 m ⁽¹⁾	NA
Giga Ethernet (base LX)	550 m	550 m	550 m	2 km
Giga Ethernet (base SX)	550 m	550 m	1100 m	NA

TIA 568

IEEE 802.3 applications

(1) Technical solution using a fibre optic cable with maximum attenuation 3 dB/km and a wavelength of 850 nm

All dimensions (mm) are nominal

Legrand cabling system LCS³ fibre optic system

technical information

Euroclass classification

Cat.Nos	Euroclass (A _{ca} ; B1 _{ca} ; B2 _{ca} ; C _{ca} ; D _{ca} ; E _{ca} ; F _{ca})	Additional criteria (smoke production, flaming droplets, acidity)		
		s1, s1a, s1b, s2, s3	d0, d1, d2	a1, a2, a3
0325 04	D _{ca}	s2	d2	a1
0325 06	D _{ca}	s2	d2	a1
0325 08	D _{ca}	s2	d2	a1
0325 09	D _{ca}	s2	d2	a1
0325 10	D _{ca}	s2	d2	a1
0325 11	D _{ca}	s2	d2	a1
0325 12	D _{ca}	s2	d2	a1
0325 14	D _{ca}	s2	d2	a1
0325 50	D _{ca}	s2	d2	a1
0325 51	D _{ca}	s2	d2	a1
0325 52	D _{ca}	s2	d2	a1
0325 53	D _{ca}	s2	d2	a1
0325 55	D _{ca}	s2	d2	a1
0325 02	D _{ca}	s2	d2	a1
0325 03	D _{ca}	s2	d2	a1
0325 37	D _{ca}	s2	d2	a1
0325 38	D _{ca}	s2	d2	a1
0325 39	D _{ca}	s2	d2	a1
0325 43	D _{ca}	s2	d2	a1
0325 44	D _{ca}	s2	d2	a1
0325 45	D _{ca}	s2	d2	a1
0326 65	D _{ca}	s2	d2	a1
0326 66	D _{ca}	s2	d2	a1
0326 67	D _{ca}	s2	d2	a1
0326 68	D _{ca}	s2	d2	a1

	Euroclass	Classification criteria	Additional criteria	AV CP system
Non combustible (e.g. mineral insulated)	A _{ca}	EN ISO 1716 Gross heat of combustion	-	'1+' including: - initial type-testing and continuous surveillance - audit and testing of samples by 3rd party certification body Factory production control by manufacturer
Low-Fire-Hazard cables (various levels)	B1 _{ca}	EN 50399 Heat release Flame spread EN 60332-1-2 Flame propagation	Smoke production (s1a, s1b, s2, s3) EN50399/EN61034-2	Acidity (a1, a2, a3) EN 50267-2-3 '3' including: - initial type-testing by 3rd party laboratory Factory production control by manufacturer
	B2 _{ca}			
	C _{ca}			
	D _{ca}		Flaming droplets (d0, d1, d2) EN 50399	
Standard cables	E _{ca}	EN 60332-1-2 Flame propagation	-	Factory production control by manufacturer
No performance determined	F _{ca}	EN 60332-1-2 Flame propagation	-	'4': initial type-testing and factory production control by manufacturer

All dimensions (mm) are nominal


LINKEO

19" freestanding cabinets



A COMPLETE SOLUTION FOR COMMERCIAL SECTOR REQUIREMENTS


Linkeo 19" enclosures have been designed to be easy to install and totally functional. With a wide range of accessories that can be used with Linkeo enclosures, you have the benefit of a complete offer to meet the requirements of all your projects.




19" uprights with U marking
and adjustable depth



Pre-cut top and bottom cable entries.
Cut-out on the roof for fan kits



Full glass door (reversible)
with screen printing for
perfect aesthetics



Removable side and rear panels
with automatic grounding



Vertical cable guide (side and rear
mount) and optional PDU support



- Equipped with levelling feet
- Can be linked using baying kit

Wall-mounting cabinets

CHOOSE THE LEVEL
OF ACCESSIBILITY
INSIDE THE CABINET



FIXED SIDE PANELS



19" version

REMOVABLE SIDE PANELS



19" version



Pivoting 19" version

COMMON FEATURES



- Reversible flat safety glass door with screen printing and integrated lock



- Supplied with 2 x 19" uprights, with adjustable depth and U marking
- Additional 19" uprights as option



- Rear, top and bottom pre-cut cable entries to be equipped with brush (provided with the cabinet)



- Top perforations for natural ventilation (can be equipped with fan kit)

connectivity and cabinet selection tables

configure your system

LINKEO 19" FREESTANDING CABINETS (p. 56)							
WITH SINGLE FRONT GLASS DOOR (see p. 56) Anthracite grey RAL 7016	Assembly	Capacity	Height (mm)	Width (mm)	Depth (mm)		
						Cat. Nos.	
		24U	1226	600	600	6467 75	
		24U	1226	800	800	6467 76	
		33U	1626	600	600	6467 80	
		33U	1626	800	800	6467 81	
		42U	2026	600	600	6467 85	
		42U	2026	600	800	6467 86	
		42U	2026	600	1000	6467 87	
		42U	2026	800	600	6467 88	
		42U	2026	800	800	6467 89	
		42U	2026	800	1000	6467 90	
EXTENSION CABINETS WITH SINGLE GLASS DOOR (see p. 56)		47U	2248	800	800	6467 98	
		47U	2248	800	1000	6467 99	
		42U	2026	800	800	6467 95	



For Linkeo ready assembled cabinets
Contact us on +44 (0) 370 608 9020



For Linkeo cabinets with double front
glass door
Contact us on +44 (0) 370 608 9020

LINKEO 19" CABINETS EQUIPMENT (p. 56-57)				
19" UPRIGHTS (p. 56) Anthracite grey RAL 7016	PLINTHS (p. 56) Anthracite grey RAL 7016	FIXED SHELVES (p. 57) Black RAL 9005	TELESCOPIC SHELVES (p. 57) Black RAL 9005	LINKEO 19" CABINETS EQUIPMENT
Cat. Nos.				
6463 40	6464 00	6465 05	6465 08	Linkeo plinths see p. 56 
6463 40	6464 03	6465 06	6465 09	Linkeo fan kits see p. 56 
6463 41	6464 00	6465 05	6465 08	Linkeo fixed shelves - shelf depth 625 mm see p. 57 
6463 41	6464 03	6465 06	6465 09	Linkeo fixed shelves - shelf depth 200 mm see p. 57 
6463 42	6464 00	6465 05	6465 08	Linkeo 19" management panels see p. 57 
6463 42	6464 01	6465 06	6465 09	
6463 42	6464 02	6465 07	6465 10	
6463 42	6464 01	6465 05	6465 08	
6463 42	6464 03	6465 06	6465 09	
6463 42	6464 04	6465 07	6465 10	
6463 43	6464 03	6465 06	6465 09	
6463 43	6464 04	6465 07	6465 10	
6463 42	6464 03	6465 06	6465 09	

connectivity and cabinet selection tables (continued)

configure your system

LINKEO FIXED 19" WALL-MOUNTING CABINETS (p. 58)								
WITH FIXED SIDE PANELS 400 MM AND 600 MM DEPTHS (see p. 58) Anthracite grey RAL 7016	DEPTH (mm)	Assembly	Capacity	Height (mm)	Width (mm)	Loading capacity (kg)		
								Cat. Nos.
With fixed side panels	450 mm	Ready assembled	6U	358	600	18	6462 00	
			9U	492	600	27	6462 01	
			12U	625	600	36	6462 02	
			15U	758	600	45	6462 03	
			18U	892	600	54	6462 04	
			21U	1035	600	63	6462 05	
	600 mm	Ready assembled	6U	358	600	18	6462 10	
			9U	492	600	27	6462 11	
			12U	625	600	36	6462 12	
			15U	758	600	45	6462 13	
			18U	892	600	54	6462 14	
			21U	1035	600	63	6462 15	
With removable side panels	450 mm	Flatpack	6U	358	600	18	6462 50	
			9U	471	600	27	6462 51	
			12U	604	600	36	6462 52	
			15U	738	600	45	6462 53	
			18U	871	600	54	6462 54	
			21U	1004	600	63	6462 55	
	600 mm	Flatpack	6U	358	600	18	6462 60	
			9U	471	600	27	6462 61	
			12U	604	600	36	6462 62	
			15U	738	600	45	6462 63	
			18U	871	600	54	6462 64	
			21U	1004	600	63	6462 65	
PIVOTING 19" CABINETS (see p. 58)								
	610 mm	Ready assembled	9U	471	600	27	6462 21	
			12U	604	600	36	6462 22	
			15U	738	600	45	6462 23	
			18U	871	600	54	6462 24	
			21U	1004	600	63	6462 25	

LINKEO 19" CABINETS EQUIPMENT (p. 58)

19" UPRIGHTS
(p. 58)
Anthracite
grey RAL 7016

FIXED SHELVES
(p. 58)
Black RAL 9005

Cat. Nos.

– 6465 01 / 6465 02

– 6465 01 / 6465 02

6462 42 6465 01 / 6465 02

6462 43 6465 01 / 6465 02

6462 44 6465 01 / 6465 02

6462 45 6465 01 / 6465 02

– 6465 01 / 6465 02

– 6465 01 / 6465 02

6462 42 6465 01 / 6465 02

6462 43 6465 01 / 6465 02

6462 44 6465 01 / 6465 02

6462 45 6465 01 / 6465 02

– 6465 01 / 6465 02

– 6465 01 / 6465 02

6462 42 6465 01 / 6465 02

6462 43 6465 01 / 6465 02

6462 44 6465 01 / 6465 02

6462 45 6465 01 / 6465 02

– 6465 01 / 6465 02

– 6465 01 / 6465 02

6462 42 6465 01 / 6465 02

6462 43 6465 01 / 6465 02

6462 44 6465 01 / 6465 02

6462 45 6465 01 / 6465 02

– 6465 01 / 6465 02

6462 42 6465 01 / 6465 02

6462 43 6465 01 / 6465 02

6462 44 6465 01 / 6465 02

6462 45 6465 01 / 6465 02

LINKEO 19" CABINETS EQUIPMENT (p. 58)

**Linkeo fixed shelves
see p. 58**



Linkeo 19" freestanding cabinets

cabinets and equipment



6467 64



6464 03



6464 30



Selection chart p. 52-53

Technical characteristics p. 57, 59-61

Pack	Cat. Nos.	Linkeo 19" cabinets				Pack	Cat. Nos.	Linkeo plinths			
		IP 20 – IK 08 baying cabinets Reversible front glass door with screen printing Removable side and rear panels Panels with automatic equipotential connection 4 sides locked with key lock Equipped with 2 x 19" uprights with U marking and adjustable in depth Pre-cut cable entries (top and bottom) To be fitted with brush cable entry Cat. No 6464 28 Cut-out at the top for fan kit Equipped with levelling feet Loading capacity: 400 kg Anthracite grey RAL 7016						Metal plinths consisting of 4 corner blocks and 4 removable traps Height 100 mm Anthracite grey RAL 7016 For cabinets width x depth (mm): 600 x 600 600 x 800 or 800 x 600 600 x 1000 800 x 800 800 x 1000			
		Single front glass door									
1	Flatpack 6467 75	Capacity 24U	Height (mm) 1226	Width (mm) 600	Depth (mm) 600		1	6464 00			
1	6467 76	24U	1226	800	800		1	6464 01			
1	6467 80	33U	1626	600	600		1	6464 02			
1	6467 81	33U	1626	800	800		1	6464 03			
1	6467 85	42U	2026	600	600		1	6464 04			
1	6467 86	42U	2026	600	800						
1	6467 87	42U	2026	600	1000						
1	6467 88	42U	2026	800	600						
1	6467 89	42U	2026	800	800						
1	6467 90	42U	2026	800	1000						
1	6467 98	47U	2248	800	800						
1	6467 99	47U	2248	800	1000						
		Extension cabinets with single glass door									
No side panels Supplied with baying kit											
1	6467 95	Capacity 42U	Height (mm) 2026	Width (mm) 800	Depth (mm) 800						
		Linkeo baying kits									
1	6463 37	For joining 2 Linkeo 19" cabinets									
		Linkeo 19" uprights									
1	6463 40	24U									
1	6463 41	33U									
1	6463 42	42U									
1	6463 43	47U									
		Set of 2 additional 19" uprights									
		Casters									
1	0464 82	Set of 4 pivoting casters, 2 of which have brakes Total loading capacity on the 4 casters: 500 kg									
		Linkeo fan kits									
1	6464 30	Integrated thermostat, adjustable from - 10 to 80°C 2.5 m cord with 2P+E plug, 230 V~ Anthracite grey RAL 7016									
1	6464 31	2 fans 4 fans									
		Linkeo cable management									
		Brush cable entry									
1	6464 28	To fit on top or bottom cabinet pre-cut cable entry Set of brushes									
		Vertical cable guides									
1	6464 20	Side or rear mounting on structure for cable bundles									
1	6464 21	For 33U cabinet									
1	6464 22	For 42U cabinet									
		For 47U cabinet									
		Cable management rings									
1	6464 25	For cabinet width 800 mm Fixes onto 19" uprights Usable dim. - 65 x 145 mm. Black RAL 9005 Set of 6 metal rings									
		Vertical cable managers									
1	6464 26	Set of 2 vertical panels to manage cords at the front side and on the whole height of the cabinet									
1	6464 27	Mounted on the side of 19" uprights Supplied with brush feedthroughs and fingers for cords management every single U									
		For 42U 800 mm wide cabinets For 47U 800 mm wide cabinets									
		PDU support									
1	6464 15	Vertical support for fixing to the rear side of cabinet For mounting vertically 19" and Zero-U PDU									
1	6464 16	For 42U cabinets For 47U cabinets									



For ready assembled Linkeo 19" freestanding cabinets

Contact us on +44 (0) 370 608 9020

Linkeo 19" freestanding cabinets

cabinets and equipment (continued)



6465 06



6465 01




6465 20




Selection chart **p. 52-53**

Technical characteristics **p. 59-61**

Pack	Cat.Nos	Linkeo fixed shelves
		Black RAL 9005
1	6465 01	Screw fixing on 2 x 19" uprights Height 2U Max. load: 15 kg Shelf depth 200 mm
1	6465 02	Shelf depth 360 mm
1	6465 05	Screw fixing on 4 x 19" uprights Height 1U Max. load: 50 kg Shelf depth 425
1	6465 06	For 600 mm deep cabinet Shelf depth 625
1	6465 07	For 800 mm deep cabinet Shelf depth 825 For 1000 mm deep cabinet



Pack	Cat.Nos	Linkeo telescopic shelves
1	6465 08	Screw fixing on 4 x 19" uprights. Height 1U Max. load: 30 kg. Black RAL 9005 Shelf depth 425
1	6465 09	For 600 mm deep cabinet Shelf depth 625
1	6465 10	For 800 mm deep cabinet Shelf depth 825 For 1000 mm deep cabinet



Pack	Cat.Nos	19" management panels
1	6465 20	Fitted with cable guide rings 1U
1	6465 21	2U

Linkeo 19" freestanding cabinets

Flatpack solution

- Easy to carry
- Easy to store
- Easy to handle
- Easy to mount:
 - 16 minutes / 1 person
 - dedicated installation sheet

High protection packaging (stackable)

Note:

- cabinets delivered flatpack are exactly the same as the ready assembled. The only difference is the packaging



Customisation

- 1 Choose the size

Capacity	24U	33U	42U	47U
Width	600 or 800 mm			
Depth	600, 800 or 1000 mm			

- 2 Choose the color
Anthracite grey (RAL 7016) or light grey (RAL 7035)

- 3 Choose the openings



Front and rear options

Doors

- screen-printed glass
- microperforated metal
- solid metal
- in single or double version

With or without side panels

- 4 Choose the equipment to mount at the factory:

- cable managers
- fans
- plinths/casters
- shelves
- copper and fibre patch panels

Linkeo 19" wall-mounting cabinets



6462 62



6462 21



Selection chart p. 54-55

Technical characteristics p. 62-63

IP 20 - IK 08

Equipped with :

- 1 reversible door made of screen-printed safety glass and with integrated lock
- 2 x 19" uprights with U marking and adjustable in depth
- 3 pre-cut cable entries (top, bottom and rear)
- 1 brush for a cable entry
- top perforations for natural ventilation
- panels with automatic grounding (ready assembled version)
- supplied with earthing kit (flatpack version)

Anthracite grey RAL 7016

Pack	Cat. Nos.		Linkeo fixed 19" cabinets											
Fixed side panels														
Delivered ready assembled														
1	Depth 450 mm	Depth 600 mm	Capacity	Height (mm)	Width (mm)	Loading capacity (kg)								
1	6462 00	6462 10	6U	358	600	18								
1	6462 01	6462 11	9U	492	600	27								
1	6462 02	6462 12	12U	625	600	36								
1	6462 03	6462 13	15U	758	600	45								
1	6462 04	6462 14	18U	892	600	54								
1	6462 05	6462 15	21U	1035	600	63								
Removable side panels														
For easy access at the side of the cabinet Opening with a lock (same key as the door)														
Delivered flatpack														
1	Depth 450 mm	Depth 600 mm	Capacity	Height (mm)	Width (mm)	Loading capacity (kg)								
1	6462 50	6462 60	6U	358	600	18								
1	6462 51	6462 61	9U	471	600	27								
1	6462 52	6462 62	12U	604	600	36								
1	6462 53	6462 63	15U	738	600	45								
1	6462 54	6462 64	18U	871	600	54								
1	6462 55	6462 65	21U	1004	600	63								

Pack	Cat. Nos.	Equipment for fixed 19" cabinets (continued)	
1	6462 38	Linkeo fan kit	Kit contains :
<ul style="list-style-type: none"> - 2 fans - 1 thermostat - ON/OFF switch 			
Supplied with 2.3 m cable			
Power supply 230 V~ - 50/60 Hz			
1	6465 01	Linkeo fixed shelves	Screw fixing on 2 x 19" uprights
1	6465 02	Height 2U	Max. load: 15 kg
Shelf depth 200 mm			
For cabinets depth 450 and 600 mm			
Shelf depth 360 mm			
For cabinets depth 450 and 600 mm			
1	6465 20	19" management panels	1U
1	6465 21		2U



	Linkeo pivoting 19" cabinets			
Cabinet composed of :				
<ul style="list-style-type: none"> - base (wall fixing), can accept 19" PDU - pivoting body allowing free access to the rear of the cabinet to facilitate installation and maintenance. Reversible pivoting direction. Delivered ready assembled 				
1	Depth 610 mm	Capacity		
1	6462 21	9U		
1	6462 22	12U		
1	6462 23	15U		
1	6462 24	18U		
1	6462 25	21U		

Equipment for fixed 19" cabinets

Linkeo 19" uprights

Set of 2 additional 19" uprights
To install at the rear of the cabinet

1	6462 42
1	6462 43
1	6462 44
1	6462 45

Casters

Set of 4 caster wheels for assembly on cabinets

Linkeo 19" freestanding cabinets

technical information

General characteristics


Metallic extendable freestanding cabinets
RAL 7016 textured polyester coating providing excellent resistance to corrosion and scratching
Reversible glass door with screen-printing
Protection index (weatherproof) against solid objects and liquids: IP 20
Protection index against mechanical impacts: IK 08
Perforations in 19" uprights: 9.5 x 9.5 mm
Permissible load: 400 kg

Compliance with standards

Linkeo cabinets comply with the following standards:

IEC 60529 EN 60529	(NF C 20-010) Degrees of protection provided by enclosures (IP code)
IEC 62262 EN 62262	(NF EN 50102, NF C 20-015) Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)
IEC 60950-1 EN 60950-1 C 77-210-1	Safety of data processing equipment
EIA-310-E	Cabinets, racks, panels and associated equipment (ANSI/EIA/310-E-2005)
IEC 60297-3-100 DIN 41414-7	(NF C 20-150, NF C 20-151) Dimensions of mechanical structures of the 482.6 mm (19 in) series
Linkeo cabinets can be integrated in installations complying with the following standards:	
EN 50173-1	Information technology - Generic cabling systems
EN 50174-1 & 2 C 90-480-1 & 2	Information technology - Cabling installation
ISO IEC 11801	Information technology - Generic cabling for customer premises
NF C 15-100 Part 4-41	Low voltage electrical installations - recommendations
IEC 60364-4-41	Low voltage electrical installations - Protection for safety - Protection against electric shock

Dimensions (mm)

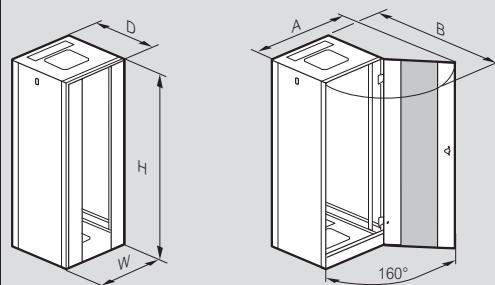

Cabinets with single front door



Cabinet dimensions	Overall dimensions				
	H ⁽¹⁾	W	D	A	B
24U 600 x 600	1226	610	630	1138	1210
24U 800 x 800		810	830	1525	1610
33U 600 x 600	1626	610	630	1138	1210
33U 800 x 800		810	830	1525	1610
42U 600 x 600	2026	610	630	1138	1210
42U 600 x 800		610	830	1138	1410
42U 600 x 1000		610	1030	1138	1610
42U 800 x 600		810	630	1525	1410
42U 800 x 800		810	830	1525	1610
42U 800 x 1000		810	1030	1525	1810
47U 800 x 800	2248	810	830	1525	1610
47U 800 x 1000		810	1030	1525	1810

(1) Without adjustment levelling feet (+19 to 39 mm with feet)


Linkeo 19" freestanding cabinets (continued)

technical information

■ Usable dimensions (mm)

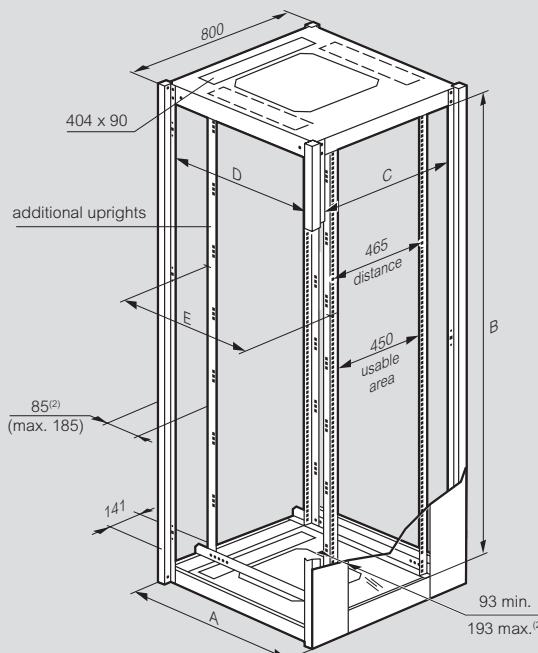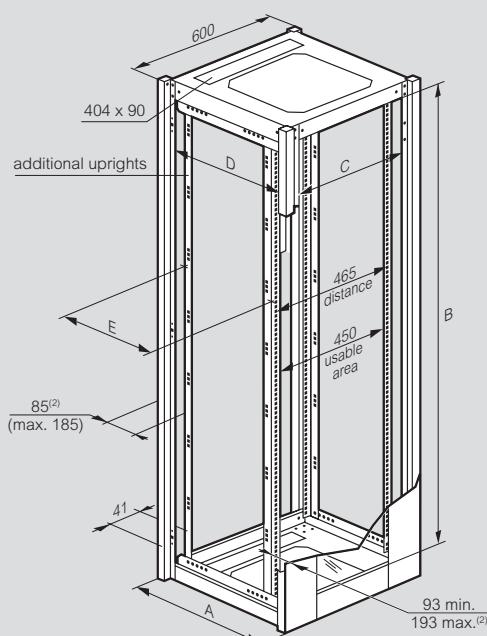


■ Plinths for Linkeo cabinets (mm)

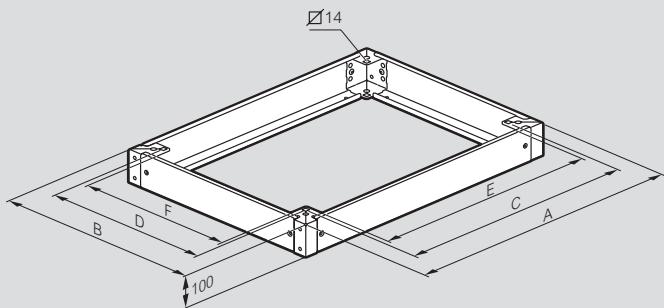

Cabinet dimensions Width x Depth	Overall		Fixing		Usable area	
	A	B	C	D	E	F
600 x 600	599	599	478	478	449	449
600 x 800	599	799	478	678	449	649
600 x 1000	799	599	678	478	649	449
800 x 600	799	799	678	678	649	649
800 x 800	599	999	478	878	449	849
800 x 1000	799	999	678	878	649	849

■ Linkeo fan kits (mm)

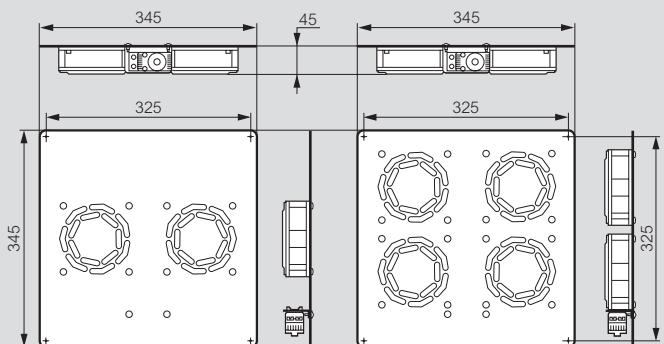

Cabinet dimensions	A ⁽¹⁾	Usable area			E	Glass window Door
		B	C	D		
24U 600 x 600	630	1081	490	490	425	1073 x 360
24U 800 x 800	830		690	690	625	1073 x 450
33U 600 x 600	630	1481	490	490	425	1473 x 360
33U 800 x 800	830		690	690	625	1473 x 450
42U 600 x 600	630		490	425		
42U 600 x 800	830		690	625		
42U 600 x 1000	1030		890	825		
42U 800 x 600	630		490	425		
42U 800 x 800	830		690	625		
42U 800 x 1000	1030		890	825		
47U 800 x 800	830	2103	690	690	625	2095 x 450
47U 800 x 1000	1030		690	890	825	2095 x 450

(1) Overall dimensions


(2) Can be adjusted in 25 mm steps

All dimensions (mm) are nominal

Linleo 19" freestanding cabinets (continued)

technical information

Linleo shelves (mm)

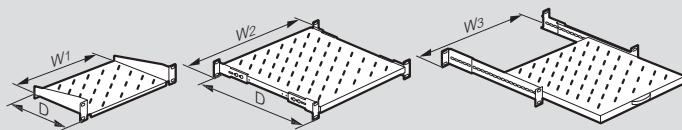

Cat. Nos.	D	Usable width		
		W1	W2	W3
6465 01	200	435		
6465 02	360	435		
6465 05	425		440	
6465 06	625		440	
6465 07	825		440	
6465 08	425			410
6465 09	625			410
6465 10	825			410


Linleo vertical cable guides

33U guide: 1486 x 300 x 25 mm



42U guide: 1886 x 300 x 25 mm

47U guide: 2105 x 300 x 25 mm

Side mounting

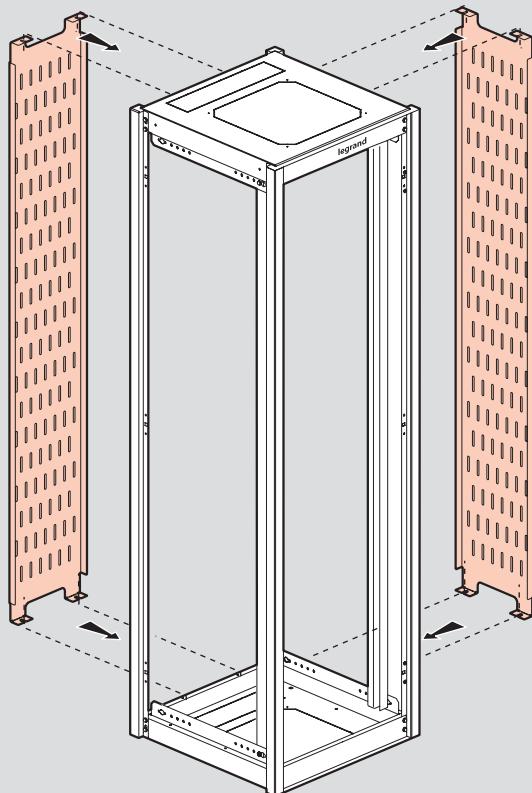


Vertical cable managers Cat. Nos. 6464 26/27

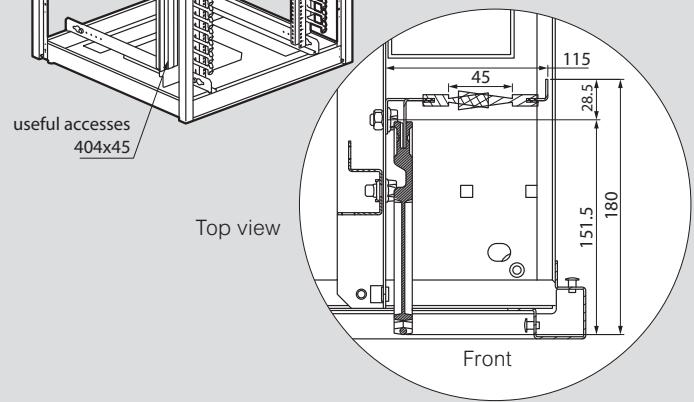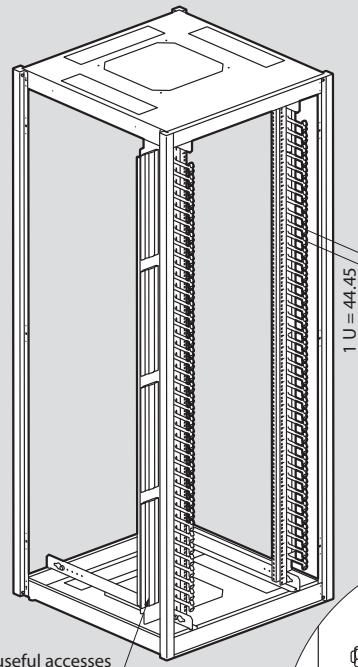


PDU supports (mm) Cat. Nos. 6464 15/16

Front view

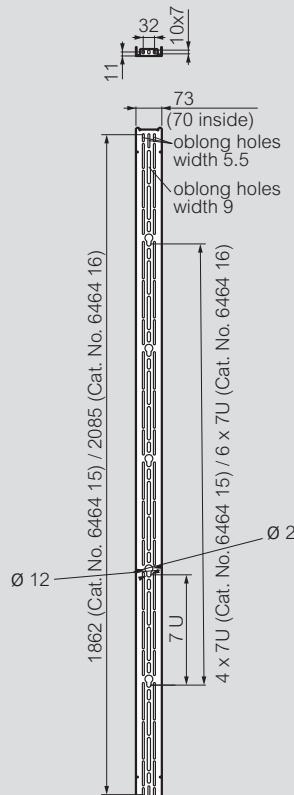

Side view

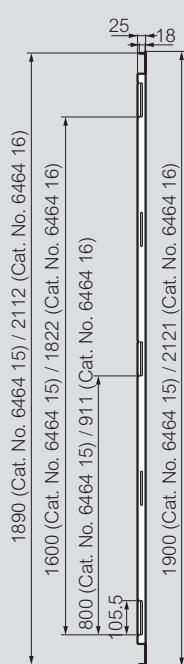

Linkeo 19" wall-mounting cabinets

technical information

General characteristics

Metal wall-mounting cabinets
 RAL 7016 textured polyester coating providing excellent resistance to corrosion and scratching
 Safety glass door
 Protection index (weatherproof) against solid objects and liquids: IP 20
 Protection index against mechanical shocks: IK 08
 Perforations in 19" uprights: 9.5 x 9.5 mm
 Permissible load: 3 kg/U

Compliance with standards


Linkeo cabinets comply with the following standards:

IEC 60529 / EN 60529	(NF C 20-010) Degrees of protection provided by enclosures (IP code)
IEC 62262 / EN 62262	(EN 50102, NF C 20-015) Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)
IEC 60950-1 / EN 60950-1 C 77-210-1	Safety of data processing equipment
EIA-310-E	Cabinets, racks, panels and associated equipment (ANSI/EIA-310-D-2005)
IEC 60297-3-100 DIN 41414-7	(NF C 20-150, NF C 20-151) Dimensions of mechanical structures of the 482.6 mm (19 in) series

Linkeo cabinets can be integrated in installations complying with the following standards:

EN 50173-1	Information technology - Generic cabling systems
EN 50174-1 & 2 C 90-480-1 & 2	Information technology - Cabling installation
ISO IEC 11801	Information technology - Generic cabling for customer premises
NF C 15-100 Part 4-41	Low voltage electrical installations - Recommendations
UTE C90-483	Residential cabling for communication networks
IEC 60364-4-41	Low voltage electrical installations - Protection for safety - Protection against electric shock

Dimensions (mm)



	Cat. Nos.	Capacity	Height (mm)	Width (mm)	Depth (mm)
19" cabinet	6462 00	6U	358	600	450
	6462 01	9U	492	600	450
	6462 02	12U	625	600	450
	6462 03	15U	758	600	450
	6462 04	18U	892	600	450
	6462 05	21U	1035	600	450
	6462 10	6U	358	600	600
	6462 11	9U	492	600	600
	6462 12	12U	625	600	600
	6462 13	15U	758	600	600
	6462 14	18U	892	600	600
	6462 15	21U	1035	600	600
	6462 50	6U	338	600	450
	6462 51	9U	471	600	450
	6462 52	12U	604	600	450
19" pivoting cabinets	6462 53	15U	738	600	450
	6462 54	18U	871	600	450
	6462 55	21U	1004	600	450
	6462 60	6U	338	600	600
	6462 61	9U	471	600	600
	6462 62	12U	604	600	600
	6462 63	15U	738	600	600
	6462 64	18U	871	600	600
	6462 65	21U	1004	600	600
	6462 21	9U	471	600	610
	6462 22	12U	604	600	610
	6462 23	15U	738	600	610
	6462 24	18U	871	600	610
	6462 25	21U	1004	600	610


All dimensions (mm) are nominal

Linkeo 19" wall-mounting cabinets (continued)


technical information

Door opening (mm)


19" cabinets with fixed side panels Cat. Nos. 6462 00/.../15



19" cabinets with removable side panels Cat. Nos. 6462 50/.../65




19" pivoting cabinets
Cat. Nos. 6462 21/.../25




	Cat. Nos.	Capacity	A (mm)	B (mm)
19" cabinet	fixed side panels	6462 00	6U	930
		6462 01	9U	930
		6462 02	12U	930
		6462 03	15U	930
		6462 04	18U	930
		6462 05	21U	930
		6462 10	6U	1130
		6462 11	9U	1130
		6462 12	12U	1130
		6462 13	15U	1130
		6462 14	18U	1130
		6462 15	21U	1130
	removable side panels	6462 50	6U	985
		6462 51	9U	985
19" pivoting cabinets		6462 52	12U	985
		6462 53	15U	985
		6462 54	18U	985
		6462 55	21U	985
		6462 60	6U	1135
		6462 61	9U	1135
		6462 62	12U	1135
		6462 63	15U	1135
		6462 64	18U	1135
		6462 65	21U	1135

Pivoting base opening

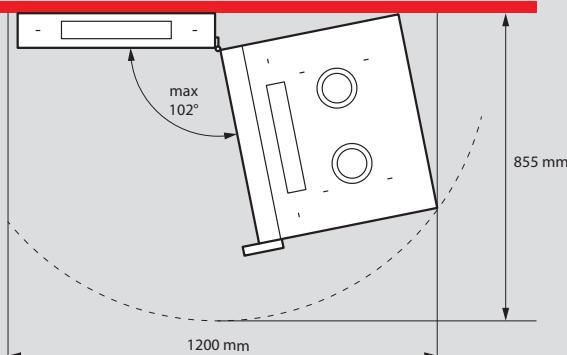


Fixing (mm)



	Cat. Nos.	Capacity	X (mm)	Y (mm)
19" cabinet	fixed side panels	6462 00	6U	400
		6462 01	9U	400
		6462 02	12U	400
		6462 03	15U	400
		6462 04	18U	400
		6462 05	21U	400
		6462 10	6U	400
		6462 11	9U	400
		6462 12	12U	400
		6462 13	15U	400
		6462 14	18U	400
		6462 15	21U	400
	removable side panels	6462 50	6U	411
		6462 51	9U	411
19" pivoting cabinets		6462 52	12U	411
		6462 53	15U	411
		6462 54	18U	411
		6462 55	21U	411
		6462 60	6U	411
		6462 61	9U	411
		6462 62	12U	411
		6462 63	15U	411
		6462 64	18U	411
		6462 65	21U	411
		6462 21	9U	350
		6462 22	12U	350
		6462 23	15U	350
		6462 24	18U	350
		6462 25	21U	350

Fan kit (mm)

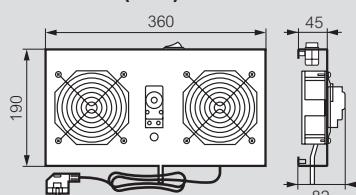


All dimensions (mm) are nominal

PDUs

Solutions for any configuration

This new PDU offer combines Legrand's quality and innovation with a wide range of applications. A standalone solution, this range integrates seamlessly into any installation and ensures compliance with applicable standards.

ZERO-U PDUs

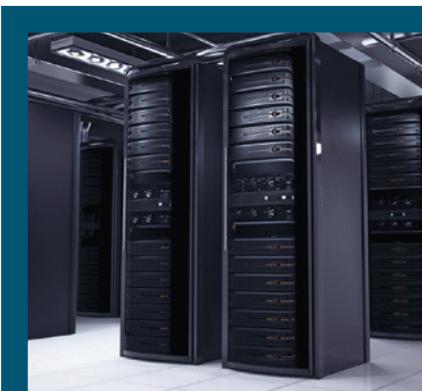


FOR DATA CENTRES/ SERVER ROOMS

Used in server cabinets where:

- there is a high density of active equipment
- electrical distribution quality is crucial

12 CATALOGUE
NUMBERS

FOR VERTICAL
INSTALLATION

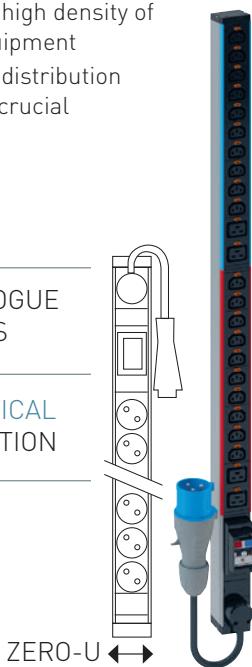

ZERO-U

19" 1U PDUs




FOR DATA CENTRES/ SERVER ROOMS AND COMPUTER ROOMS

Used in server and cabling cabinets where:

- there is a low density of active equipment to be powered
- ease of installation is an advantage

26 CATALOGUE NUMBERS

FOR VERTICAL OR
HORIZONTAL INSTALLATION

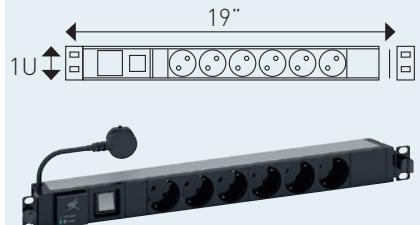


Cord locking system

Innovation at the heart of PDUs


A major addition to the range and exclusive to Legrand, C13 and C19 outlets have a power supply cord locking system which prevents accidental disconnection and guarantees absolute safety.

AN INNOVATIVE TECHNICAL SOLUTION

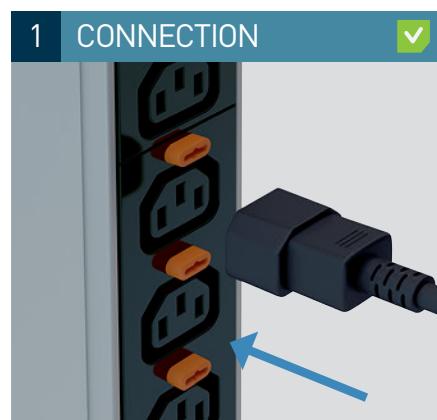

CORD CONNECTION

The cord is connected to the outlet in one smooth action

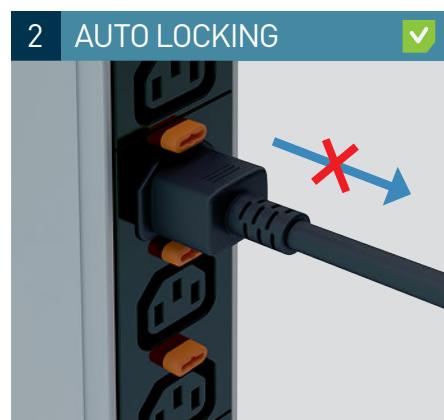

CORD HELD IN PLACE

Once the power supply cord is connected, it locks automatically and cannot be removed



CORD LOCKING SYSTEM


Very easy to identify thanks to the orange buttons next to each outlet



EASY REMOVAL


Simply pressing the unlock button releases the cord from the outlet

EXCLUSIVE TO LEGRAND

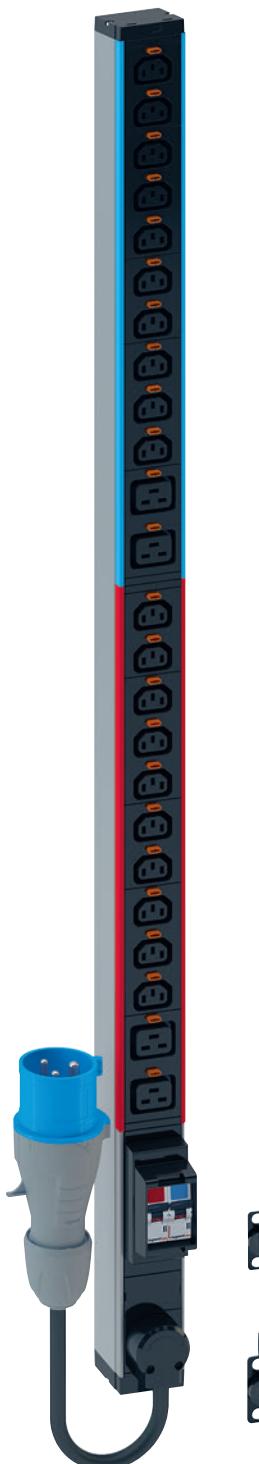


ZERO-U PDUs

Innovation & performance

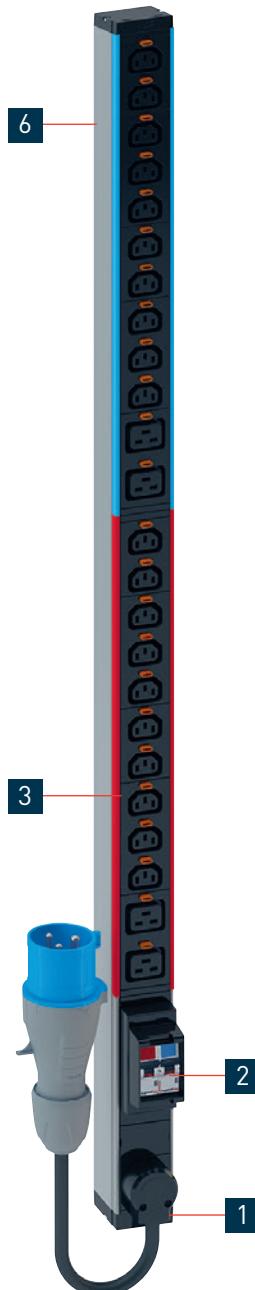

Legrand's innovations, which include safety features, simplified setup and integration, and consumption indicators, help ensure optimum performance for the Zero-U range of PDUs.

VERTICAL
INSTALLATION

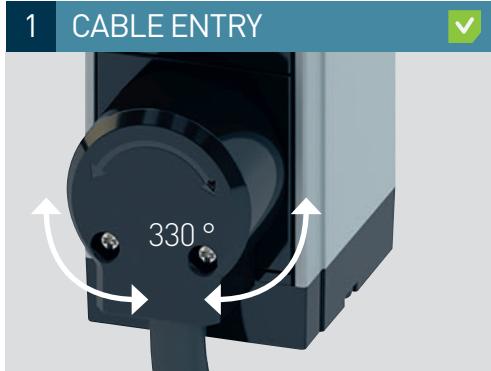


CABLE ORIENTATION

330° rotating cable entry for perfect cable orientation without needing to access the cabinet.



ENHANCED PROTECTION

Holder with projecting edges to avoid unintended operation (a cover can be added on request).

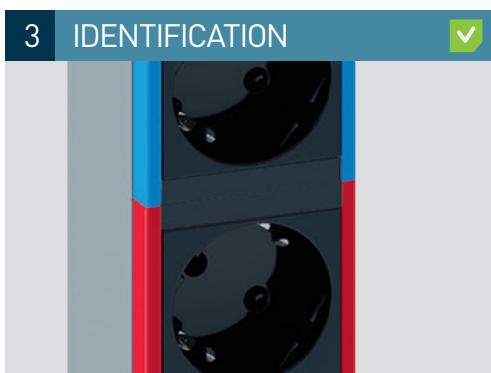

COLOUR-CODED CIRCUITS

Each circuit is colour-coded, with the colour clearly visible on the front panel and along the edges of a module.

The colour corresponds to the specific MCB protecting the circuit.



CONSUMPTION INDICATOR

Consumption is measured to ensure better installation management:

- Balancing circuits
- Display of available capacity
- Power features and overload prevention



5 POWER SUPPLY

There are multiple solutions depending on power supply requirements

16/32 A single-phase



16/32 A three-phase



6 SCREWLESS MOUNTING

Zero-U PDUs simply clip vertically into slots on the mounting frame without the need for screws.





1U PDUs

Innovation & convenience

19" PDUs are designed for installation in server and cabling cabinets and incorporate the latest innovations for facilitating integration and maintenance, with clever mounting and operating features.

HORIZONTAL
OR VERTICAL
INSTALLATION

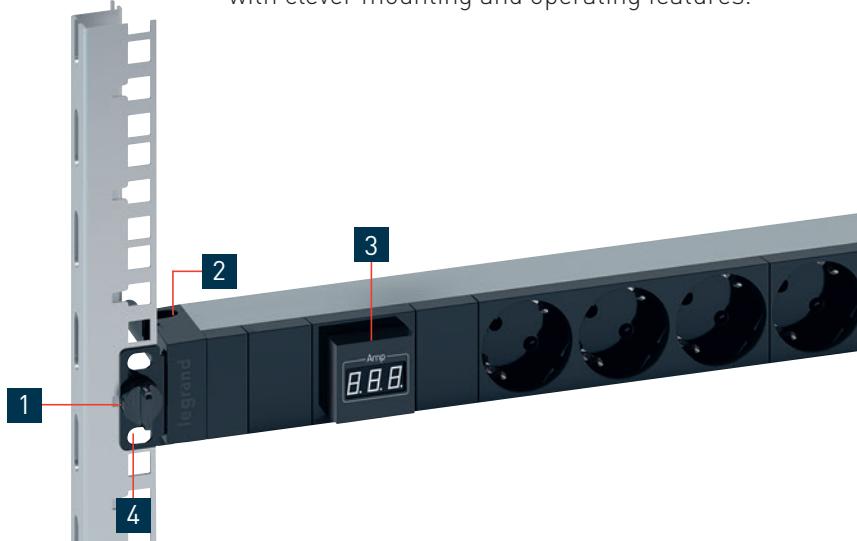

1 QUICK FIXING



TOOLLESS INSTALLATION

Quick, toolless fixing on the 19" uprights. No screws or nuts required.

2 CABLE GUIDE



OPTIMISED SPACE

Cables are held firmly in place by a cable guide.

3 AMMETER



CHANGE OF POSITION

The ammeter can be rotated 90° to ensure easy reading regardless of mounting position (horizontal or vertical).

4 MOUNTING SUPPORTS



HORIZONTAL OR VERTICAL

Designed for horizontal toolless mounting, 1U PDUs can also be mounted vertically simply by rotating the mounting brackets. Vertical mounting requires a bolt and nut to fix the PDU firmly to the upright.



✓ EXCLUSIVE TO LEGRAND





connectivity and Power Distribution Units selection tables

configure your system

LCS ³ SINGLE PHASE ZERO-U VERTICAL PDUs (p. 70)			Connection on 6 mm ² terminal block	3m power supply cord with 32 A 2P+E plug
	24 outlets	British Standard	-	6468 54
		24 C13 - IEC 60320	6468 56	6468 57
		20 C13 + 4 C19 - IEC 60320	6468 60	6468 61
		20 C13 + 4 C19 - IEC 60320	6468 65 with ammeter	-
LCS ³ ZERO-U 3 PHASE VERTICAL PDUs (p. 71)			Connection on 6 mm ² terminal block	3m power supply cord with 32 A 3P+E plug
	24 outlets	18 C13 + 6 C19 - IEC 60320	-	6468 70
		18 C13 + 6 C19 - IEC 60320	-	6468 75 with ammeter
LCS ³ 1U 19" SINGLE PHASE PDUs (p. 72)			Connection on 6 mm ² terminal block	3m power supply cord
	8 outlets	British Standard	-	6468 13 with 13 A 2P+E plug
	10 outlets	10 C13 - IEC 60320	6468 14	-
	12 outlets	12 C13 - IEC 60320	-	6468 15 with 16 A 2P+E plug
	8 outlets	6 C13 and 2 C19 - IEC 60320	6468 09	-
	6 outlets	6 C19 - IEC 60320	6468 07	-
LCS ³ 1U 19" SINGLE PHASE PDU - WITH POWER INDICATOR / LUMINOUS SWITCH (p. 72)			Power Indicator / Luminous switch 3m power supply cord with 13 A 2P+E plug	
	6 outlets	British Standard	6468 24	
LCS ³ 1U 19" SINGLE PHASE COMBINED PDUs (p. 73)			With Ammeter	
	6 outlets	6 C13 - On terminal block	6468 43	
	7 outlets	6 C13 + 1 C19 - on terminal block	6468 45	
	6 outlets	6 C19 - on terminal block	6468 44	


connectivity and Power Distribution Units selection tables (continued)

configure your system

LCS ³ METERED PDUs (p. 73)			19" - metered with 3m power supply cord	Vertical Zero-U - metered 3m power supply cord
	12 outlets	C13 IEC60320	6460 10 with C20 plug	–
	16 outlets	12 C13 + 4 C19 - IEC60320	6460 11 with 32 A 2P+E plug	–
	16 outlets	12 C13 + 4 C19 - IEC60320	–	6460 12 with 32 A 2P+E plug
	42 outlets	36 C13 + 6 C19 - IEC60320	–	6460 13 with 32 A 2P+E plug
	42 outlets	36 C13 + 6 C19 - 3 phase IEC60320	–	6460 14 with 16 A 3P+N+E plug
	42 outlets	30 C13 + 12 C19 - 3 phase IEC60320	–	6460 15 with 32 A 3P+N+E plug
SENSORS FOR METERED PDUs (p. 73)				
	Temperature sensor		6460 00	
	Temperature / humidity sensor		6460 01	
	Dual contact closure sensor		6460 02	
PDU TO BE EQUIPPED (p. 74)				
	PDU 19" - capacity: 16 Arteor modules		6468 99	
PDU ACCESSORIES (p. 74)				
	Locking caps	Set of 6 locking caps for British standard outlet + 1 key	6468 92	
		Set of 6 locking caps for C13 standard outlet + 1 key	6468 94	
		Set of 6 locking caps for C19 standard outlet + 1 key	6468 95	
	Surge protection module	Surge protection replacement module	6468 97	
	Multi-applications DIN rail	DIN profile rail with front panel	0465 46	
		Rear cover	0465 47	

Legrand cabling system LCS³ energy distribution

single phase Zero-U vertical Power Distribution Units

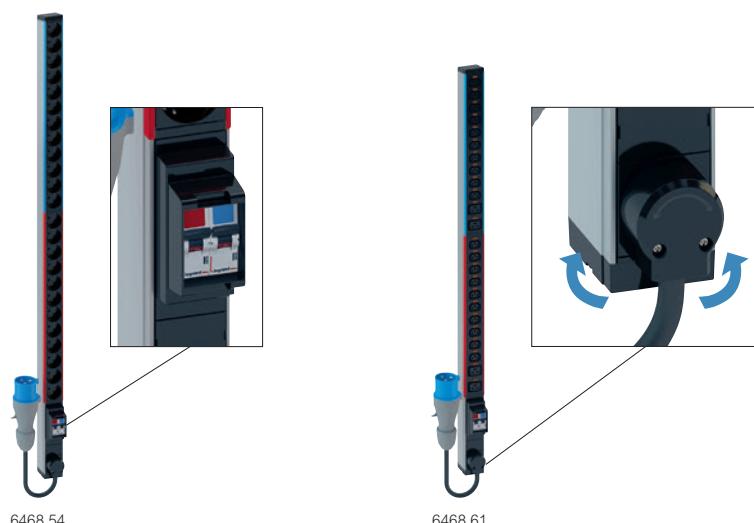

Selection chart p. 68
Technical characteristics p. 75-77

To provide \sim electric power for IT equipment in 19" enclosures
Single phase Zero-U PDU for vertical mounting in the cabinet

230 V - 50/60 Hz power supply

PDU with 2 circuits protected by 16 A uni+neutral MCB in a support with projecting edges to avoid accidental breakdown

Each circuit is identified by color coding

Total number of outlets is distributed equally between the 2 circuits

2P+E outlets:

- C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)

British standard outlets are equipped with blanks

330° rotating cable input for a perfect orientation of the cable and no interference in the cabinet

Delivered with 2 sets of metallic mounting brackets:

- Button brackets, for quick fixing and variable pitch

- Standard brackets, for screw fixing


Black modules (outlets and functions). Aluminium profile

Pack	Cat. Nos.	Standard single phase PDUs
1	6468 54	British standard 24 outlets Connection on terminal block up to 6 mm ²
1	6468 56	IEC 60320 standard 24 C13 outlets with cord locking system Connection on terminal block up to 6 mm ²
1	6468 57	24 C13 outlets with cord locking system
1	6468 60	3 m power supply cord with IEC 60309 32 A 2P+E plug 20 C13 outlets + 4 C19 outlets with cord locking system. Connection on terminal block up to 6 mm ²
1	6468 61	20 C13 outlets + 4 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 2P+E plug

Pack	Cat. Nos.	Single phase PDU with ammeter
1	6468 65	Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures 1 ammeter per circuit Rotating display to ensure correct orientation whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input)

Legrand cabling system LCS³ energy distribution

three phase Zero-U vertical Power Distribution Units

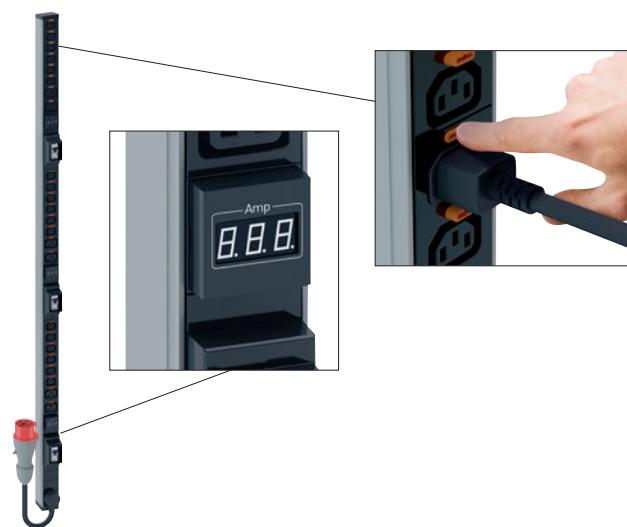

6468 75

Selection chart **p. 68**
Technical characteristics **p. 75-77**

To provide \sim electric power for IT equipments in 19" enclosures
Three phase Zero-U PDUs for vertical mounting in the cabinet

380 V - 50/60 Hz power supply

Each circuit is protected by 16 A single pole MCB in a support with projecting edges to avoid accidental breakdown

1 circuit per phase, each with 6 IEC 60320 C13 outlets and 2 IEC 60320 C19 outlets

330° rotating cable input for a perfect orientation of the cable and no interference in the cabinet

C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)

British standard outlets are equipped with blanks

Delivered with 2 sets of metallic mounting brackets:

- Button brackets, for quick fixing and variable pitch

- Standard brackets, for screw fixing

Black modules (outlets and functions). Aluminium profile


Pack	Cat. Nos.	Standard 3 phase PDU
1	6468 70	IEC 60320 standard 18 C13 outlets + 6 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 3P+N+E plug
1	6468 75	3 phase PDU with ammeter Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures 1 ammeter per circuit Rotating display to ensure correct orientation whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input) IEC 60320 standard 18 C13 outlets + 6 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 3P+N+E plug



AN INNOVATIVE TECHNICAL SOLUTION: CORD LOCKING SYSTEM
Very easy to identify thanks to the orange buttons next to each outlet

Legrand cabling system LCS³ energy distribution

1U 19" Power Distribution Units

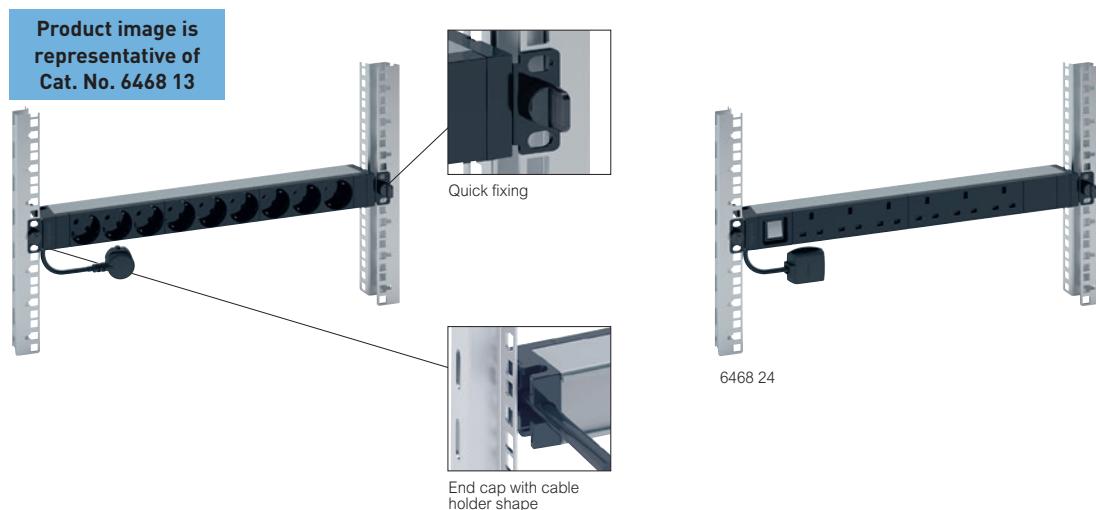

Selection chart p. 68
Technical characteristics p. 75-77

To provide \sim electric power for IT equipment in enclosures
230 V - 50/60 Hz power supply

1U aluminium profile. End cap with metallic brackets and cable holder shape. Quick fixing (no screws) on 19" fixing centres
Can also be installed vertically by reverting the brackets (no screws)


2P+E outlets:

- C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)
 - British standard outlets are equipped with blanks
- Black modules (outlets and functions). Aluminium profile

Pack	Cat. Nos.	19" - PDU standard
1	6468 13	British standard 3 m power supply cord with 13 A 2P+E British plug 8 outlets
1	6468 14	IEC 60320 standard Connection on terminal block (except Cat. No. 6468 15)
1	6468 15	10 C13 outlets with cord locking system
1	6468 09	12 C13 outlets with cord locking system
1	6468 07	3 m power supply cord with 16 A IEC 60309 2P+E British plug
		6 C13 outlets + 2 C19 outlets with cord locking system
		6 C19 outlets with cord locking system

Pack	Cat. Nos.	19" - PDU with power indicator / luminous switch
1	6468 24	LED indicator gives information whether the PDU is supplied with power or not LED indicator switch powers on/off all PDU outlets British standard 3 m power supply cord with 13 A 2P+E British plug 6 outlets and 1 luminous switch

Legrand cabling system LCS³ energy distribution – 1U 19" single phase combined PDUs

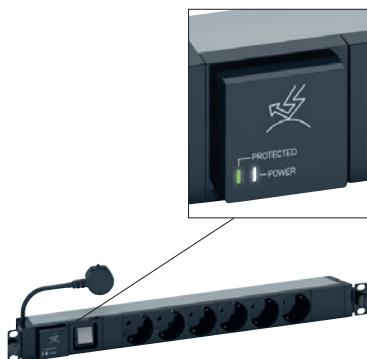

Product image is representative of Cat. No. 6468 43

Selection chart p. 68
Technical characteristics p. 75-77

To provide \sim electric power for IT equipment in enclosures
230 V - 50/60 Hz power supply
1U aluminium profile. End cap with metallic brackets and cable holder shape. Quick fixing (no screws) on 19" fixing centres
Can also be installed vertically by reverting the brackets (no screws)
2P+E outlets:
- C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)
- British standard outlets are equipped with blanks
Black modules (outlets and functions). Aluminium profile

Pack	Cat. Nos.	19" - PDU with ammeter
		<p>Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures Measure total PDU current Rotating display to ensure a perfect reading whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input)</p> <p></p> <p>IEC 60320 standard With integrated universal plug locking system Connection on terminal block</p>
1	6468 43	6 C13 outlets with cord locking system
1	6468 45	6 C13 outlets + 1 C19 outlet with cord locking system
1	6468 44	6 C19 outlets with cord locking system

Legrand cabling system LCS³ energy distribution – metered Power Distribution Units



Product image is representative of Cat. No. 6460 12

Selection chart p. 69
Technical characteristics p. 75-77

Power distribution units with metering at inlet level and circuit breaker level
Possibility of environmental monitoring through one of the optional external sensors (temperature, humidity...)

Pack	Cat. Nos.	19" - metered PDUs
1	6460 10	IEC 60320 standard 12 C13 outlets with 3 m power supply cord with C20 plug
1	6460 11	12 C13 and 4 C19 outlets with 3 m power supply cord with IEC60309 32 A 2P+E plug
		Vertical Zero-U - metered PDUs
1	6460 12	IEC 60320 standard 12 C13 and 4 C19 outlets with 3 m power supply cord with IEC60309 32 A 2P+E plug
1	6460 13	36 C13 and 6 C19 outlets with 3 m power supply cord with IEC60309 32 A 2P+E plug
1	6460 14	36 C13 and 6 C19 outlets with 3 m power supply cord with 3 phase IEC60309 16 A 3P+N+E plug
1	6460 15	30 C13 and 12 C19 outlets with 3 m power supply cord with 3 phase IEC60309 32 A 3P+N+E plug
		Sensors for metered PDUs
1	6460 00	Temperature sensor
1	6460 01	Temperature / humidity sensor
1	6460 02	Dual contact closure sensor

Metered Power Distribution Units available soon
Contact us on +44 (0) 370 608 9020

Legrand cabling system LCS³ energy distribution

accessories for Power Distribution Units

Product image is
representative of
Cat. No. 6468 92



0465 46 + 0465 47

Selection chart p. 69
Technical characteristics p. 75-77


Pack	Cat. Nos.	PDU to be equipped	Pack	Cat. Nos.	Multi-applications DIN rail
1	6468 99	For self assembly with Arteor wiring device modules Quick fixing (no screws) on 19" uprigths Aluminium profile PDU 19" Capacity: 16 Arteor modules	1	0465 46	For mounting modular devices (circuit breakers, Legrand multimedia network components, etc) Capacity: 24 modules Height 4 U Screw fixing on 19" uprigths DIN profile rail with front panel Supplied with blanking plates 24 modules Black RAL 9005
1	6468 92	PDU accessories	1	0465 47	Rear cover To be used for high current applications (greater than 50 V) Used with Cat. No. 0465 46 Ensures IP XXXB Supplied with terminal block (8 + 1 connections)
1	6468 94	Locking caps To block the use of an outlet. A key is necessary to remove the cap and free the access Light grey			
1	6468 95	Set of 6 locking caps for British standard outlet + 1 key Set of 6 locking caps for C13 standard outlet + 1 key Set of 6 locking caps for C19 standard outlet + 1 key			
1	6468 97	Surge protection module To replace used module on PDU With light indicators: - one LED (white) gives information whether the PDU is supplied with power or not - one LED (green) indicates when surge protection module is efficient or must be replaced Hotswappable: replacement keeping the PDU and its outlets powered on Surge protection replacement module			

Legrand cabling system LCS³ energy distribution


19" 1U Power Distribution Units mounting – technical information

Horizontal mounting in Legrand 19" cabinets

Can be mounted in all Legrand 19" cabinets

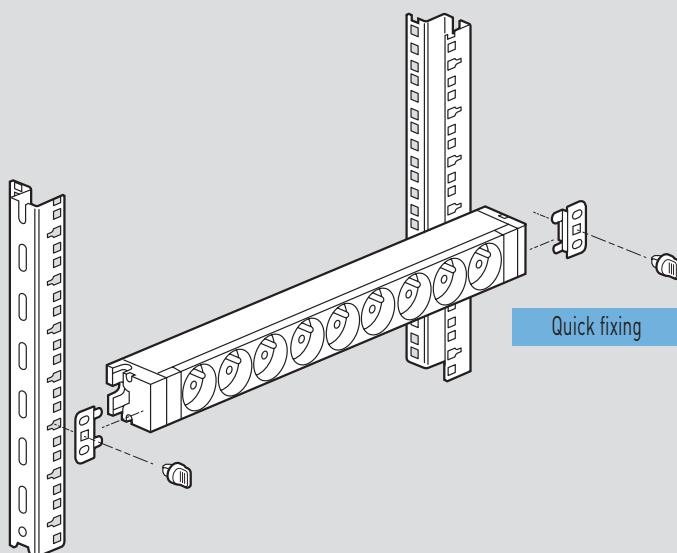


Vertical mounting in freestanding cabinets with support

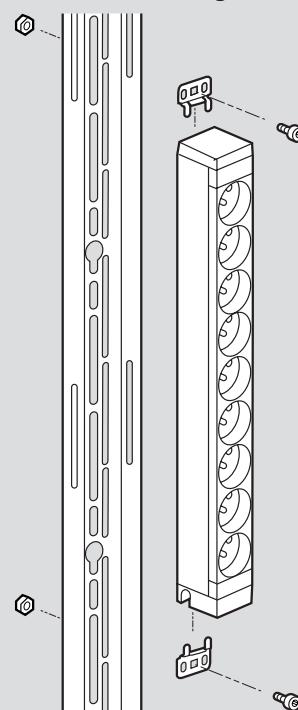

19" 1U PDU configurations


6468 07



6468 09




6468 13




6468 14



6468 15



6468 24



6468 43



6468 44




6468 45




Legrand cabling system LCS³ energy distribution

Zero-U Power Distribution Units – technical information

Zero-U PDU configurations

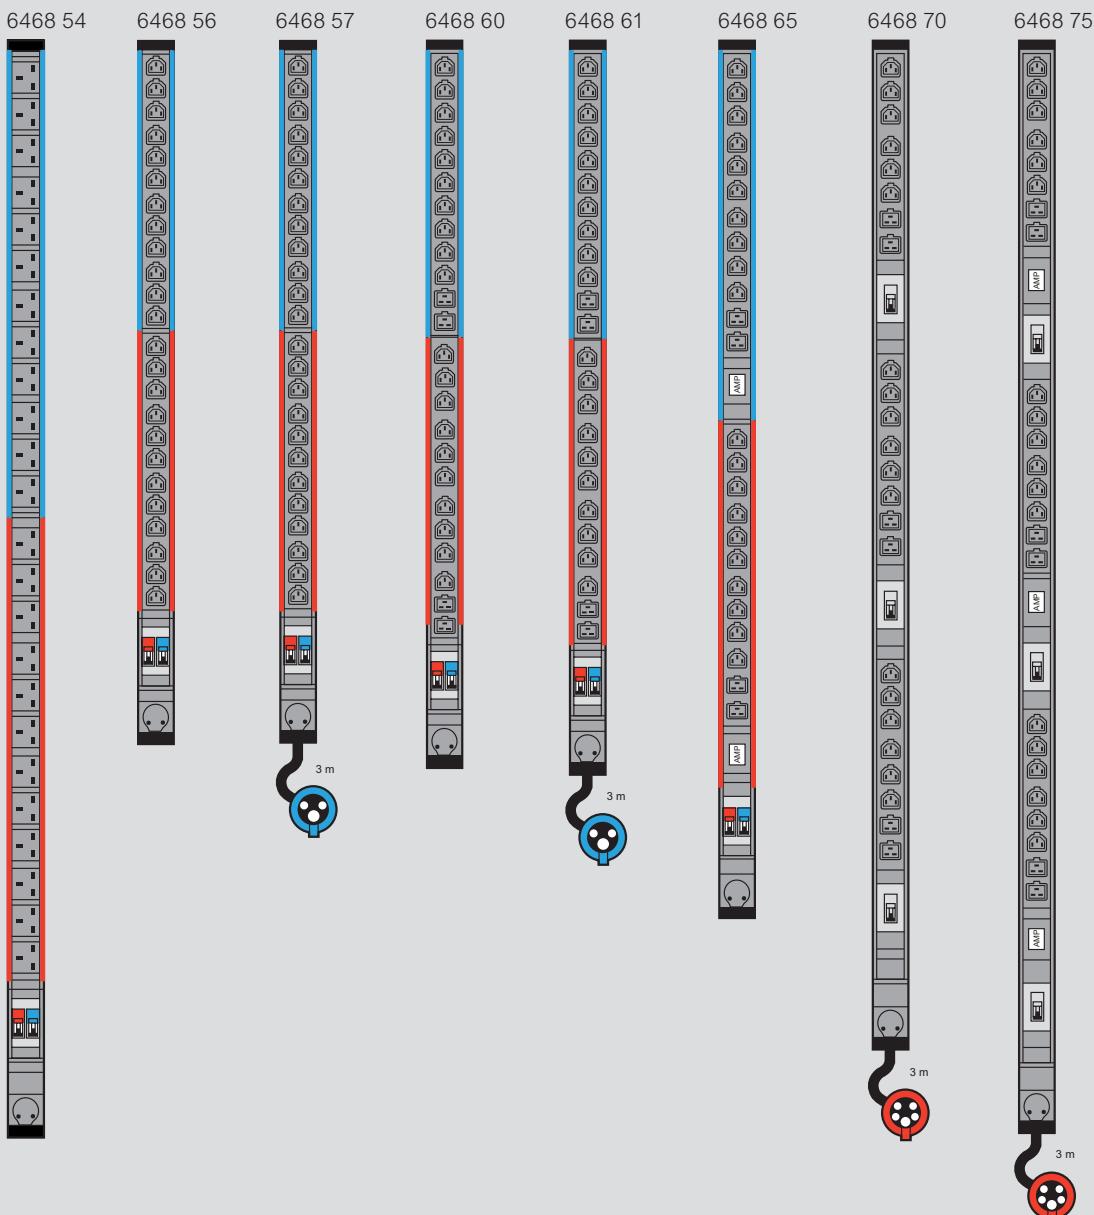

Zero-U PDU sizes (mm)



Cat. Nos.	Height		Width	Depth		Fixing centres (mini-maxi)
	A	B ⁽¹⁾		D	E ⁽²⁾	
6468 54	1463	1507	52	52.5	87	1475-1495
6468 56	1031	1075	52	52.5	87	1043-1063
6468 57	1031	1075	52	52.5	87	1043-1063
6468 60	1067	1111	52	52.5	87	1079-1099
6468 61	1067	1111	52	52.5	87	1079-1099
6468 65	1157	1201	52	52.5	87	1169-1189
6468 70	1340	1384	52	52.5	87	1352-1372
6468 75	1475	1519	52	52.5	87	1487-1507

(1) Overall height with standard brackets (screw fixing)
(2) Overall depth at the circuit breaker slot


All dimensions (mm) are nominal

Legrand cabling system LCS³ energy distribution

Zero-U Power Distribution Units – technical information (continued)


■ Solution with button brackets

Quick fixing without screws with support

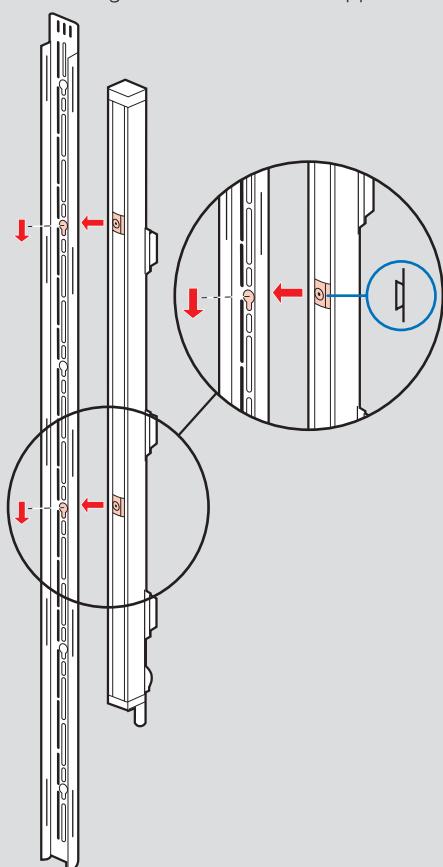


■ Solution with LCS³ brackets

Screw fixing with support

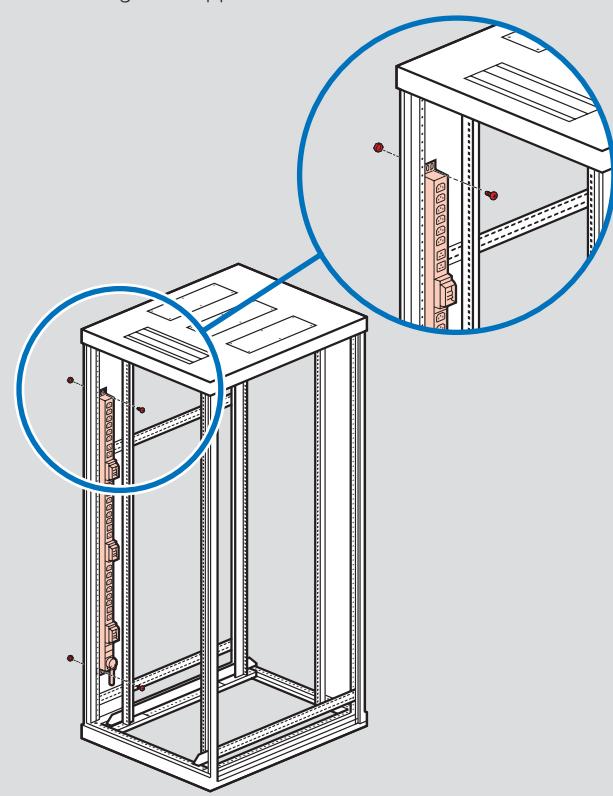

■ Solution with standard brackets

Screw fixing with support

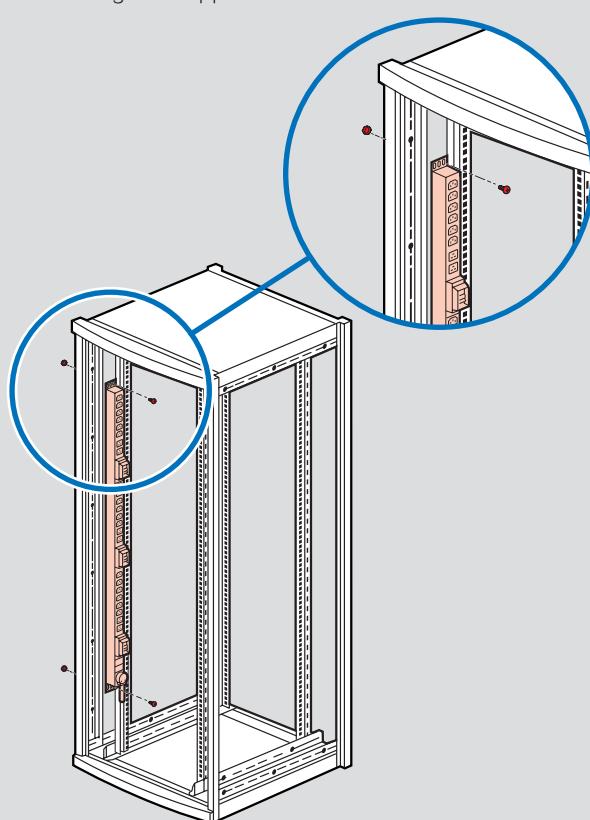

All dimensions (mm) are nominal

Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.
		0321 64	41	0324 03	45	0325 53	46	0327 44	43
0320 00		0321 65	-	0324 04	-	0325 55	-	0327 50	28
0321 00	41	0321 66	-	0324 05	-	0326 00	47	0327 51	-
0321 02	-	0321 67	-	0324 11	-	0326 01	-	0327 52	-
0321 04	-	0321 71	-	0324 12	-	0326 02	-	0327 53	-
0321 06	-	0321 72	-	0324 13	-	0326 03	-	0327 54	24
0321 10	-	0321 73	-	0324 14	-	0326 04	-	0327 55	-
0321 11	-	0321 74	-	0324 15	-	0326 05	-	0327 56	-
0321 12	-	0322 10	43	0324 21	-	0326 06	-	0327 58	-
0321 13	-	0322 11	-	0324 22	-	0326 07	-	0327 59	-
0321 14	-	0322 12	-	0324 23	-	0326 08	-	0327 60	30
0321 15	-	0322 13	-	0324 24	-	0326 09	-	0327 76	24
0321 16	-	0322 14	-	0324 25	-	0326 10	-	0327 77	20
0321 17	-	0322 15	-	0324 31	-	0326 11	-	0327 78	-
0321 20	-	0322 20	-	0324 32	-	0326 12	-	0327 79	-
0321 21	-	0322 21	-	0324 33	-	0326 13	-	0327 98	-
0321 23	-	0322 22	-	0324 34	-	0326 14	-	0327 99	-
0321 24	-	0322 23	-	0324 35	-	0326 15	-	0328 50	28
0321 25	-	0322 24	-	0324 41	-	0326 16	-	0328 53	-
0321 27	-	0322 30	-	0324 42	-	0326 17	-	0328 56	24
0321 28	-	0322 31	-	0324 43	-	0326 24	43	0328 57	-
0321 29	-	0322 32	-	0324 44	-	0326 26	-	0328 61	-
0321 30	-	0322 33	-	0324 45	-	0326 28	47	0328 78	20
0321 31	-	0322 34	-	0324 51	-	0326 29	-	0328 82	-
0321 32	-	0322 40	-	0324 52	-	0326 30	-	0328 83	-
0321 33	41, 42	0322 41	-	0324 53	-	0326 31	-	0328 84	-
0321 34	-	0322 42	-	0324 54	-	0326 32	-	0328 85	-
0321 40	42	0322 43	-	0324 55	-	0326 33	-	0330 00	
0321 41	-	0322 44	-	0325 02	46	0326 34	-	0330 48	43
0321 42	-	0322 45	-	0325 03	-	0326 35	-	0330 49	-
0321 43	-	0322 46	-	0325 04	-	0326 36	-	0330 61	47
0321 44	-	0322 47	-	0325 06	-	0326 37	-	0330 63	-
0321 45	-	0322 48	-	0325 08	-	0326 65	45	0330 65	-
0321 46	-	0322 49	-	0325 09	-	0326 66	-	0330 69	-
0321 47	-	0322 70	44	0325 10	-	0326 67	-	0330 70	-
0321 50	43	0322 71	-	0325 11	-	0326 68	-	0330 71	-
0321 51	-	0322 72	-	0325 12	-	0326 71	43	0330 72	-
0321 52	-	0322 73	-	0325 14	-	0326 86	47	0330 73	-
0321 53	-	0322 74	-	0325 37	-	0326 87	-	0330 75	-
0321 54	-	0322 75	-	0325 38	-	0326 88	-	0330 76	-
0321 55	-	0322 81	-	0325 39	-	0326 89	-	0330 80	-
0321 56	-	0322 82	-	0325 43	45	0326 92	-	0330 81	-
0321 57	-	0322 83	-	0325 44	-	0326 95	-	0330 82	-
0321 58	-	0322 84	-	0325 45	-	0326 96	-	0331 00	43
0321 61	41	0322 85	-	0325 50	46	0326 97	-	0331 27	-
0321 62	-	0324 01	45	0325 51	-	0326 98	-	0331 47	-
0321 63	-	0324 02	-	0325 52	-	0326 99	-		

Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.	Cat. Nos.	Page No.
0332 62	30	0337 88	17	0518 16	20	0780 00		5728 50	21
0337 01	17	0337 90	15, 18, 22	0518 17	28	0786 14	47	5728 51	-
0337 02	-		26	0518 18	24	0786 16	-	5728 52	-
0337 03	-	0337 91	15, 18, 22	0518 50	-	0786 17	-	5728 53	25
0337 04	-		26	0518 51	-			5728 54	-
0337 05	-	0337 92	16, 19, 23	0518 52	-	5720 00		5728 55	-
0337 06	-		27	0518 53	-	5723 02	25	5728 57	21
0337 07	-	0337 93	18, 22, 26	0518 54	-	5723 03	29	5728 58	-
0337 08	-	0337 94	19, 23, 27	0518 55	-	5723 04	-	5728 59	-
0337 09	-	0337 95	19, 23, 27	0518 56	-	5723 06	21	6460 00	
0337 10	-	0460 00		0518 57	-	5723 14	25		
0337 11	-	0464 82	56	0518 58	-	5723 15	29	6460 00	73
0337 12	-	0465 46	74	0518 59	-	5723 16	25	6460 01	-
0337 13	-	0465 47	-	0518 60	-	5723 17	-	6460 02	-
0337 17	-			0518 61	-	5723 22	-	6460 10	-
0337 21	-	0510 00		0518 62	-	5723 23	-	6460 11	-
0337 22	17	0516 36	28	0518 63	-	5723 30	29	6460 12	-
0337 23	-	0516 37	-	0518 64	-	5723 31	25	6460 13	-
0337 24	-	0516 38	-	0518 65	-	5723 32	29	6460 14	-
0337 25	-	0516 39	-	0518 66	20	5723 33	25	6460 15	-
0337 26	-	0516 40	-	0518 67	-	5723 39	-	6462 00	58
0337 27	-	0516 41	-	0518 68	-	5723 49	21	6462 01	-
0337 50	26	0516 42	-	0518 69	-	5723 50	-	6462 02	-
0337 51	-	0516 43	-	0518 70	-	5723 51	-	6462 03	-
0337 53	27	0517 03	30	0518 71	-	5723 52	-	6462 04	-
0337 54	27	0517 04	-	0518 72	-	5723 53	25	6462 05	-
0337 55	16, 19, 23	0517 06	-	0518 73	-	5723 54	-	6462 10	-
	27, 42	0517 07	-	0518 74	-	5723 55	-	6462 11	-
0337 56	16, 19, 23	0517 09	-	0518 75	-	5723 57	21	6462 12	-
	27	0517 52	24	0518 76	-	5723 58	-	6462 13	-
0337 57	16, 19, 23	0517 53	-	0518 77	-	5723 59	-	6462 14	-
	27, 42	0517 54	-	0518 78	-	5728 02	25	6462 15	-
0337 58	16, 19, 23	0517 55	-	0518 79	-	5728 03	29	6462 21	-
	27	0517 62	-	0518 80	-	5728 04	-	6462 22	-
0337 59	16, 19, 23	0517 63	-	0518 81	-	5728 06	21	6462 23	-
	27	0517 64	-	0518 82	-	5728 14	25	6462 24	-
0337 60	22	0517 65	-	0518 83	-	5728 15	29	6462 25	-
0337 61	-	0517 72	-	0518 84	-	5728 16	25	6462 38	-
0337 62	-	0517 73	-	0518 85	-	5728 17	-	6462 42	-
0337 63	23	0517 74	-	0518 90	17, 20, 24	5728 22	-	6462 43	-
0337 64	-	0517 75	-		28	5728 23	-	6462 44	-
0337 65	-	0517 80	20	0530 00		5728 30	29	6462 45	-
0337 70	18	0517 81	-	0533 00	30	5728 31	25	6462 48	-
0337 72	-	0517 82	-	0533 01	-	5728 32	29	6462 50	-
0337 73	19	0517 83	-	0533 02	-	5728 33	25	6462 51	-
0337 75	-	0518 14	28	0533 03	-	5728 39	-	6462 52	-
0337 82	15	0518 15	24			5728 49	21	6462 53	-

Cat. Nos.	Page No.	Cat. Nos.	Page No.
6462 54	58	6467 89	56
6462 55	-	6467 90	-
6462 60	-	6467 95	-
6462 61	-	6467 98	-
6462 62	-	6467 99	-
6462 63	-	6468 07	72
6462 64	-	6468 09	-
6462 65	-	6468 13	-
6463 37	56	6468 14	-
6463 40	-	6468 15	-
6463 41	-	6468 24	-
6463 42	-	6468 43	73
6463 43	-	6468 44	-
6464 00	-	6468 45	-
6464 01	-	6468 54	70
6464 02	-	6468 56	-
6464 03	-	6468 57	-
6464 04	-	6468 60	-
6464 15	-	6468 61	-
6464 16	-	6468 65	-
6464 20	-	6468 70	71
6464 21	-	6468 75	-
6464 22	-	6468 92	74
6464 25	-	6468 94	-
6464 26	-	6468 95	-
6464 27	-	6468 97	-
6464 28	-	6468 99	-
6464 30	-		
6464 31	-		
6465 01	57, 58		
6465 02	-		
6465 05	57		
6465 06	-		
6465 07	-		
6465 08	-		
6465 09	-		
6465 10	-		
6465 20	57, 58		
6465 21	-		
6467 75	56		
6467 76	-		
6467 80	-		
6467 81	-		
6467 85	-		
6467 86	-		
6467 87	-		
6467 88	-		

Protection classifications

Protection against solid bodies and liquids : Index of protection - IP xx

Degree of protection of enclosures of electrical equipment in accordance with standards IEC 60529, BS EN 60529
Up to 1 000 V~ and 1 500 V_{dc}

1 st digit: protection against solid bodies		Additional letter IP XX (ABCD): protection against direct contact resulting from the access to hazard- ous current-carrying parts			2 nd digit: protection against liquids	
IP	tests	IP	tests	protection		
0	No protection	A	Ø 50 mm	The back of the hand remains remote from dangerous parts	0	No protection
1	Ø 50 mm		d		1	Protected against vertically-falling drops of water (condensation)
2	Ø 12.5 mm	B	12 mm	The dangerous parts can not be touched when introducing a finger	2	Protected against drops of water falling at up to 15° from the vertical
3	Ø 2.5 mm	C		The dangerous parts can not be touched when introducing a tool (eg a screwdriver)	3	Protected against drops of rain water at up to 60° from the vertical
4	Ø 1 mm	D		The dangerous parts can not be touched when introducing a wire	4	Protected against projections of water from all directions
5	Protected against dust (no harmful deposit)				5	Protected against jets of water from all directions
6	Completely protected against dust				6	Protected against jets of water of similar force to heavy seas
					7	Protected against the effects of immersion
					8	Protected against prolonged effects of immersion under pressure

Protection against mechanical impact : Index of protection - IK

According to standards IEC 62262 and
BS EN 62262

IK	Tests	Impact energy (in Joules)
IK 00		0
IK 01	0.2 kg 75 mm	0.15
IK 02	0.2 kg 100 mm	0.2
IK 03	0.2 kg 175 mm	0.35
IK 04	0.2 kg 250 mm	0.5
IK 05	0.2 kg 350 mm	0.7
IK 06	0.5 kg 200 mm	1
IK 07	0.5 kg 400 mm	2
IK 08	1.7 kg 295 mm	5
IK 09	5 kg 200 mm	10
IK 10	5 kg 400 mm	20

(1) A product previously classed as IP xx-7 can be assumed to fulfill the conditions of an IP xx - IK 08

This table can be used to ascertain the resistance of a product to an impact given in Joules from the IK code (graduated from 00 to 10).

It can also be used to ascertain the correspondence with the old IP code 3rd digit and the corresponding external "Ag" conditions.

The contents of the Protection Classifications charts are for guidance only. If you have any doubt as to the interpretation of the information contained therein, please refer either to the standard itself or contact Legrand.

Health and Safety at Work, etc. Act. 1974

Statement to Purchasers and Prospective Purchasers

1. Section 6 of this Act provides that manufacturers, designers, importers or suppliers of articles for use at work have a duty to ensure so far as is reasonably practical, that the article will be safe and without risk to health when properly used. An article is not regarded as being 'properly used' if it is used without regard to any relevant information or advice relating to its use made available by the manufacturer, designer, importer or supplier.

2. With regard to these provisions the following is given as a guide to the information which is readily available to you. This information relates to those products detailed in our catalogue(s) or associated literature or may be obtained by specific request to the Company.

3. All products should be installed and maintained in accordance with good engineering practice and relevant British or

other applicable standards, regulations for the installation of equipment by the Institute of Electrical Engineers or any other applicable Codes of Practice.

Health and Safety at Work Act

The Electricity at Work Regulations, 1989

- All installations and maintenance should be carried out within the provision of the above Act and by persons so qualified as defined in the Act.
- Information and advice on the suitability of our products can be obtained from Legrand Electric Limited on specific request.

For information concerning wiring device standards outside the UK contact :

BSI

Tel : +44 (0) 20 8996 9000

Fax : +44 (0) 20 8996 7001

Email : cservices@bsigroup.com
www.bsigroup.com



marking appears on electrical or electronic products from Legrand and enables the circulation of goods outside the UK.

voltimum

Conditions of sale
Please consult our current price list

In accordance with its policy of continuous improvement the Company reserves the right to change specifications and designs without notice.
All illustrations, descriptions, dimensions and weights in this catalogue are for guidance and cannot be held binding on the Company.

Contact details


Legrand Electric Ltd.
Great King Street North,
Birmingham, B19 2LF

Quotations and Technical Support:

Tel: +44 (0) 370 608 9020
Fax: +44 (0) 370 608 9021
E-mail: legrand.sales@legrand.co.uk

Customer Services:

Tel: +44 (0) 345 605 4333
Fax: +44 (0) 345 605 4334
E-mail: legrand.sales@legrand.co.uk

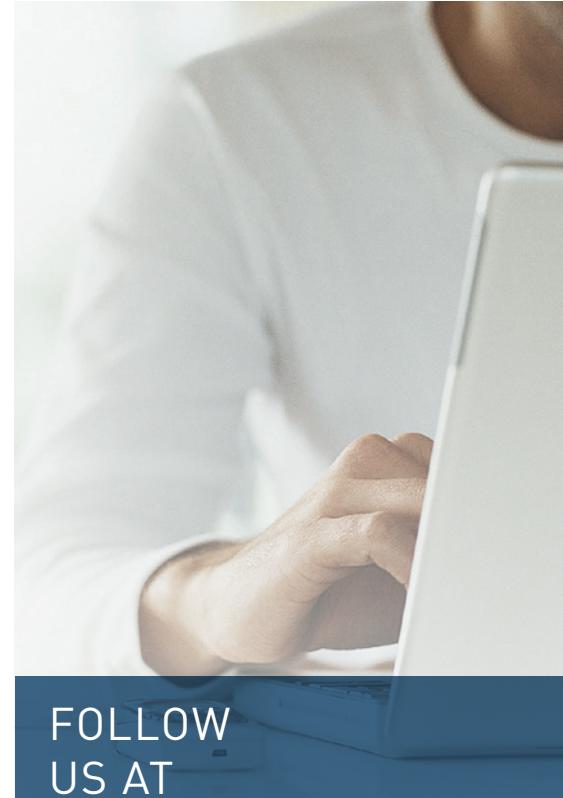

FOLLOW
US AT

- @ www.legrand.co.uk
www.legrand.ie
-  www.youtube.com/legrandtvuk
-  www.twitter.com/legranduk
-  www.voltimum.co.uk
www.voltimum.ie



Head office [UK and Ireland]:

Legrand Electric Limited
Great King Street North, Birmingham, B19 2LF
Tel: +44 (0) 370 608 9000 Fax: +44 (0) 370 608 9004
Website: www.legrand.co.uk

In accordance with its policy of continuous improvement, the Company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in this catalogue are for guidance and cannot be held binding on the Company. All contents and design presentation included in this publication are © Legrand Electric Limited. All rights reserved. 2018



This document is printed on sustainably sourced paper. Please recycle.

The Legrand logo is a registered trademark of the Legrand group of companies.